
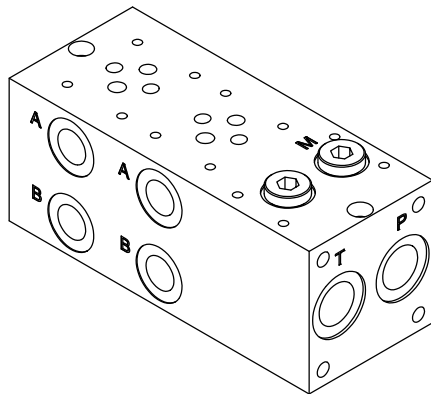





MONOBLOCCO CETOP 3 CON UTILIZZI A-B LAT 3/8" BSP . P-T POST 1/2" BSP CON
VALVOLA ELETTRICA OPZIONALE
MONOBLOCK CETOP 3 WITH A-B PORTS ON SIDE 3/8" BSP, P-T REAR 1/2" BSP
WITH OPTIONAL VENTING VALVE

OLEODINAMICA
2mp


Schema idraulico
Hydraulic diagram

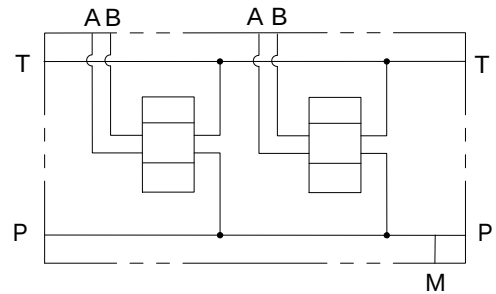

INTERFACCIA AUSILIARE SU ELEMENTI AGGIUNTIVI (USARE OR2106)
INTERFACE FOR ADDITIONAL AUXILIARY ELEMENTS (USE OR2106)

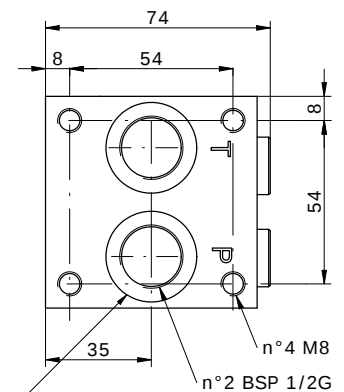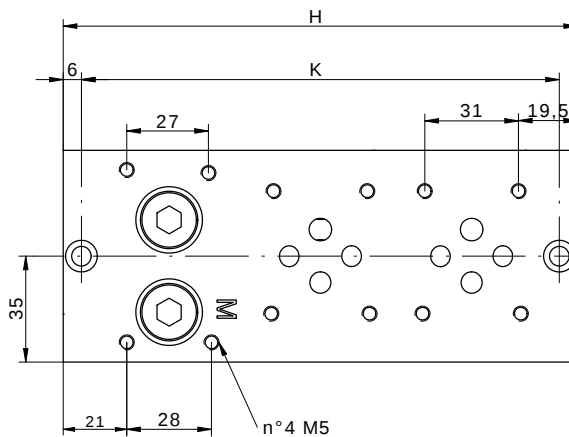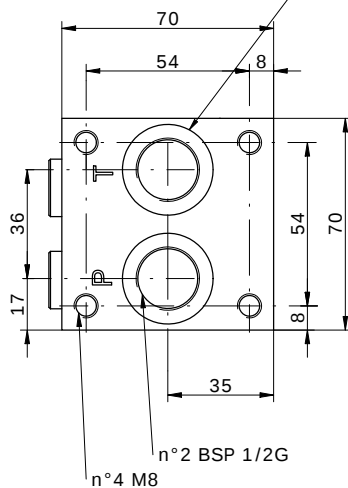

INTERFACCIA AUSILIARE SU ELEMENTI
AGGIUNTIVI (USARE OR2106)
INTERFACE FOR ADDITIONAL AUXILIARY
ELEMENTS (USE OR2106)

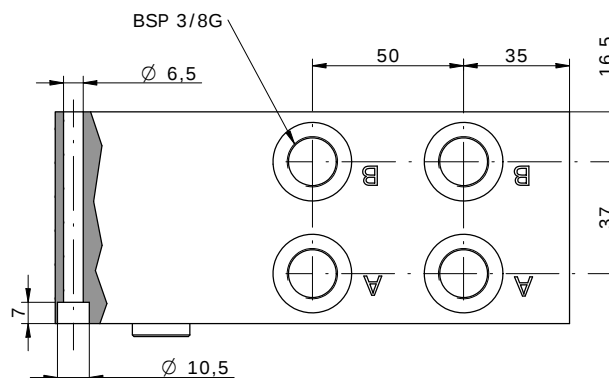

E_ 06 - 21 - 38 - _ - 0

ACCESSORI DISPONIBILI / AVAILABLE ACCESSORIES:

E_06-17-12 ELEMENTO PER VENTING O VALVOLA DI
MASSIMA/VENTING OR RELIEF VALVE ELEMENT (p. 14.1)
E_06-24- ELEMENTO AGGIUNTIVO VENTING/
VENTING ELEMENT (p. 14.2)










VEDI ASSIEMI / SEE ASSEMBLY

POS.	01	02	03	04	05	06	07	08	09	10
H	120	170	220	270	320	370	420	470	520	570
K	108	158	208	258	308	358	408	458	508	558

Via Nicolò Copernico 12/c-d
29027 Casoni Di Gariga - Podenzano (PC) Italy

www.oleodinamica2mp.it
Tel +39 0523 523231
Fax +39 0523 524509

2OLEODINAMICA**mp**

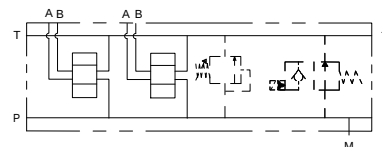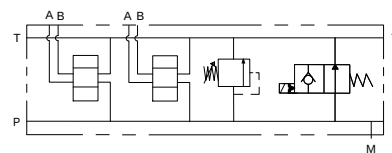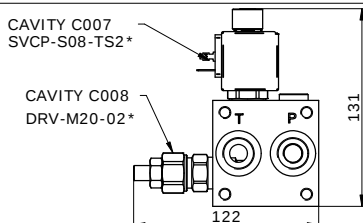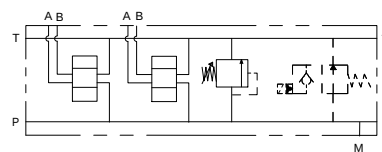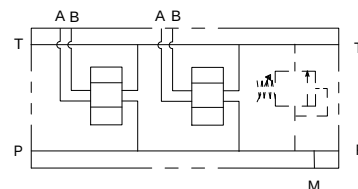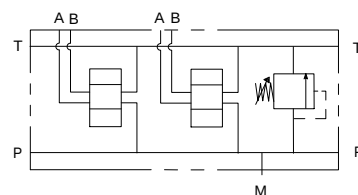

S = STEEL
A = ALUMINIUM

MOUNTING POSITIONS:01÷10

0 = WITHOUT RELIEF VALVE
1 = WITH RELIEF VALVE
2 = RELIEF VALVE READY
4 = WITH R.V. AND V.V. READY
5 = WITH R.V. AND V.V.
6 = V.V. READY AND R.V. READY

0 = WITHOUT R.V.
1 = 5-55 bar
2 = 25-110 bar
3 = 50-215 bar
4 = 100-350 bar
5 = 100-420 bar

0 = WITHOUT RELIEF VALVE

H = HEX. HEAD SCREW **K** = KNOB **C** = COVER CAP **I** = NOT ADJUSTABLE



SEALS

SEALS
N = BUNA
V = VITON

VENTING VALVE

000 = WITHOUT V.V.
TS2 = NORMALLY OPEN

VENTING VALVE

0 = NO MANUAL OVERRIDE
3 = PUSH PIN
4 = PUSH BOTTON
5 = HEX. ALLEN

CONNECTOR TYPE

CONNECTOR TYPE
0 = WITHOUT COIL
C = CAVI / LEADS
D = DIN 43650
G = DEUTSCH DT04-2P
A = AMP JUNIOR

TENSIONE / VOLTAGE


000 = WITHOUT COIL
D12 = 12 VDC
D24 = 24 VDC
220 = 220 RAC

E_06-24- (p. 14.2)



*see *CARTRIDGE VALVES* datasheets

Via Nicolò Copernico 12/c-d
29027 Casoni Di Gariga - Podenzano (PC) Italy


www.oleodinamica2mp.it
Tel +39 0523 523231
Fax +39 0523 524509

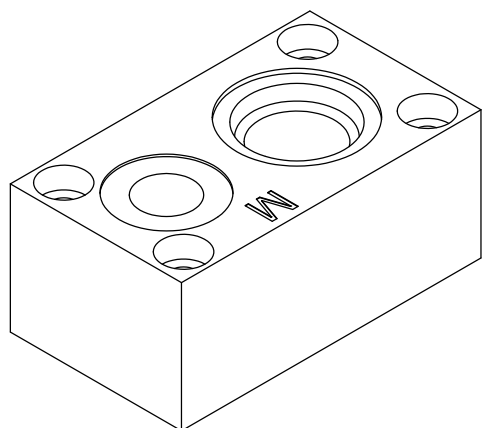

Schema idraulico
Hydraulic diagram

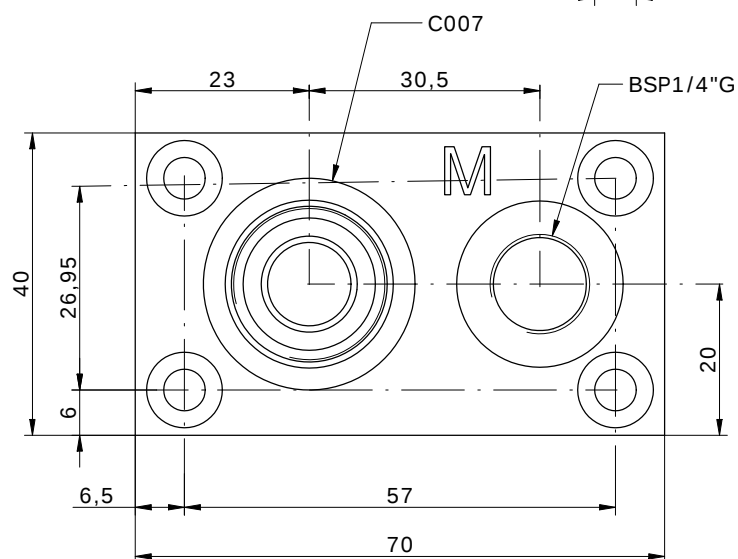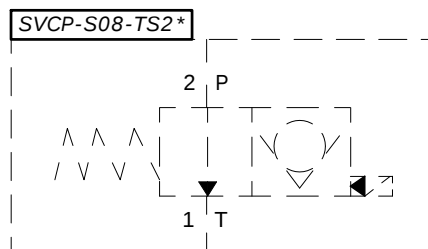

EXAMPLE OF APPLICATION

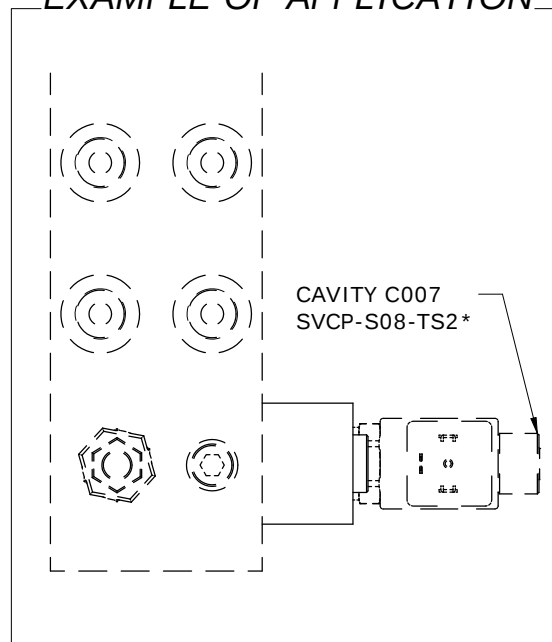

Valvola elettrica venduta separatamente
Venting valve sold separately

**DISPONIBILE PER /
AVAILABLE FOR:**
E_06-21

E_06 - 24 - - - - -

S = STEEL
A = ALUMINIUM

0 = VENTING VALVE READY
1 = WITH VENTING VALVE

VENTING VALVE
000 = WITHOUT V.V.
TS2 = NORMALLY OPEN

SEALS
N = BUNA
V = VITON

VENTING VALVE
0 = NO MANUAL OVERRIDE
3 = PUSH PIN
4 = PUSH BOTTOM
5 = HEX. ALLEN

CONNECTOR TYPE
0 = WITHOUT COIL
C = CAVI / LEADS
D = DIN 43650
G = DEUTSCH DT04-2P
A = AMP JUNIOR

TENSIONE / VOLTAGE
000 = WITHOUT COIL
D12 = 12 VDC
D24 = 24 VDC
220 = 220 RAC

* see **CARTRIDGE VALVES** datasheets

Via Nicolò Copernico 12/c-d
29027 Casoni Di Gariga - Podenzano (PC) Italy

www.oleodinamica2mp.it
Tel +39 0523 523231
Fax +39 0523 524509