


Compact hydraulic power unit

Type BKA

Single- and two-stage up to 700 bar
LP: 100 bar / 2,1 to 6,36 l/min
HP: 700 bar / 0,38 to 2,04 l/min

Features

- Compact design
- Self-venting
- Various combinations possible
- Single- or two-stage models

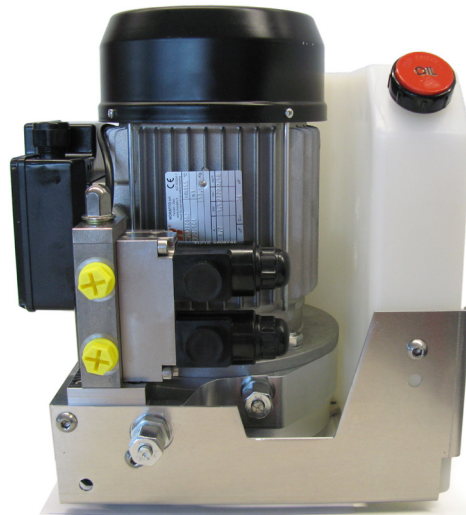

Design

- Integrated low-pressure unloading valve
- Integrated fail safe valve
- For the assembly of valve banks
- Identical flange connections for electric motors from 0,55 to 2,2 kW
- Various tank sizes

Applications

- Presses
- Rescue equipment
- Stamping
- Torque wrench
- Clamping
- Test equipment
- Crimping tools
- General mobile applications

Technical Data

Hydraulic fluid	Mineral oil according to DIN ISO 6743-4 (other fluids on request)	
Fluid temperature range	-20 to 80 °C	
Ambient temperature range	-20 to 50 °C	
Viscosity range	12 to 220 mm ² /s	
Max. operating pressure HP	700 bar	
Max. operating pressure LP	100 bar	
Noise level	approx. 86 dB (at 3000 rpm) approx. 78 dB (at 1500 rpm)	
Filtration	According to NAS 1638 class 6 resp. ISO/DIN 4406 17/15/12	
Weight	See product information	
Installation position	Vertical	
Overall dimensions	See product information page 4	
Material	Excentric shaft:	steel
	Pump housing:	aluminium
	Tank:	plastic

Type BKA

LP: 100 bar / 2,1 to 6,36 l/min
HP: 700 bar / 0,38 to 2,04 l/min

Ordering code

Example

BKA - **E** - **1** **15** - **1,1** - **0,38/700** - **2,84/100** - **2** - **M** - **00**

Bieri compact power unit

Driver E (electrical motor)

For electrical motors
1 (1-phase 230V)
2 (1-phase 115V)
3 (3-phase 230V)
4 (3-phase 400V)

Speed
15 (1500 rpm)
18 (1800 rpm)
30 (3000 rpm)
36 (3600 rpm)

Electrical motor output
0,55 (0,55 kW)
0,75 (0,75 kW)
1,1 (1,1 kW)
1,5 (1,5 kW)
2,2 (2,2 kW)

Flow rate characteristics HP / Pressure HP [bar]
see table page 6

Flow rate characteristics LP / Pressure LP [bar]
see table page 6

Tank volume [Litre]
2 (2,5)
6 (6)


Options
X (without options)
M (Pressure gauge)
P (Pressure switch)
S (Pressure sensor)

Special model

00 (Basic unit)
01 (with bypass valve 24VDC)
02 (with bypass valve 230VAC)
03 (with bypass valve 110VAC)
04 ..
05 ..

Type BKA

LP: 100 bar / 2,1 to 6,36 l/min
HP: 700 bar / 0,38 to 2,04 l/min

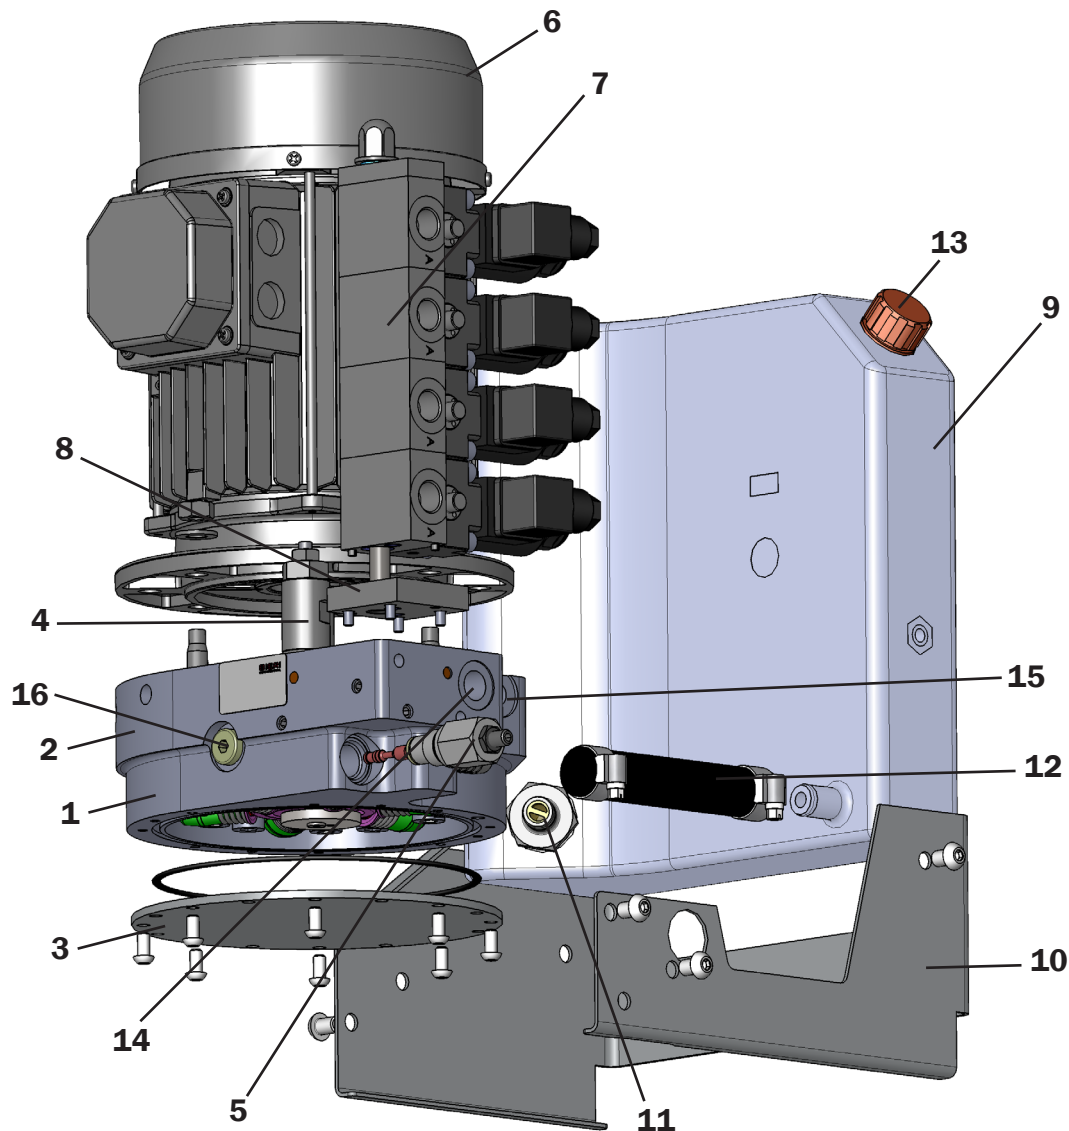**Pos. Components**

- | | |
|---|--|
| 1 | Pump |
| 2 | Pump flange |
| 3 | Pump head |
| 4 | Pressure relief valve |
| 5 | Pressure Shut-off valve (only for 2-Stage power units) |
| 6 | Electric motor |
| 7 | Control valve (optional) |
| 8 | Adaptor plate (optional) |

Pos. Components


- | | |
|----|----------------------|
| 9 | Tank |
| 10 | Tank attachment |
| 11 | Suction |
| 12 | Return flow |
| 13 | Filling |
| 14 | Appliance connection |
| 15 | Pressure connection |
| 16 | Air-vent screw |

Type BKA


LP: 100 bar / 2,1 to 6,36 l/min
HP: 700 bar / 0,38 to 2,04 l/min

Dimensional drawings

BKA model for electric motors

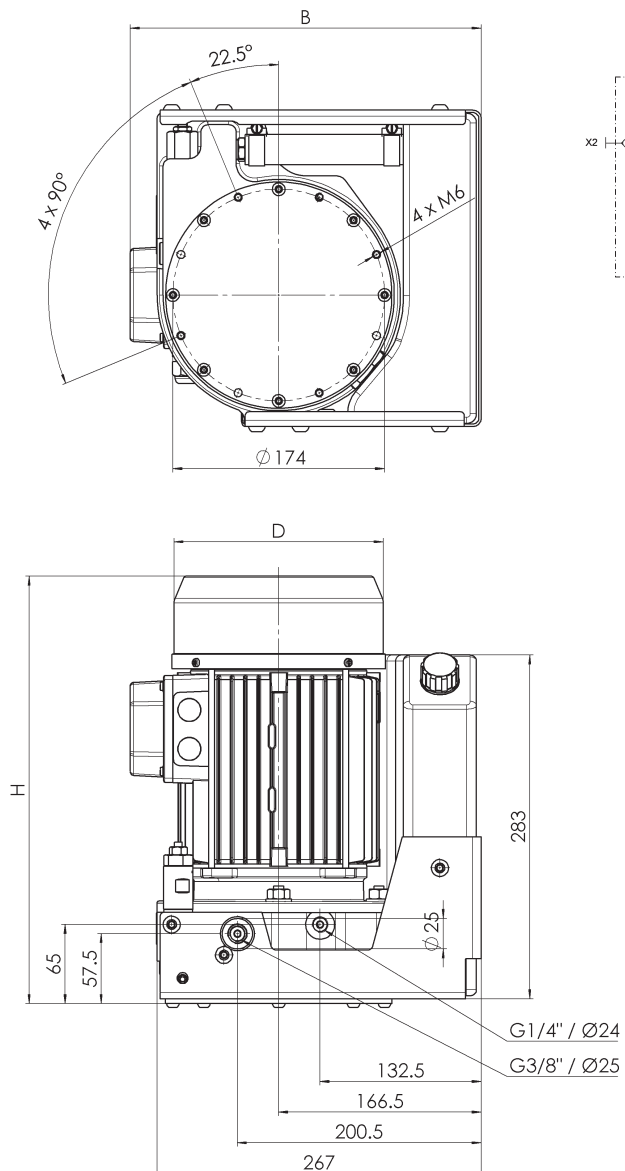

Hydraulic schematics

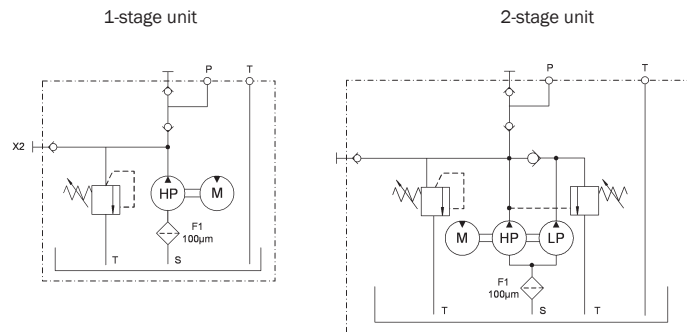


Dimension chart for units 1500 & 3000 l/min.

D	H	B		Dimension 1-stage [kg]	Dimension 2-stage [kg]	Motor
		2.5 L Tank	6 L Tank			
Ø160	315	253	343	15	18	0,75 kW
Ø175.5	330	260	350	18	21	1,1 kW
Ø175.5	382	289	379	20	23	2,2 kW

Type BKA


LP: 100 bar / 2,1 to 6,36 l/min
HP: 700 bar / 0,38 to 2,04 l/min

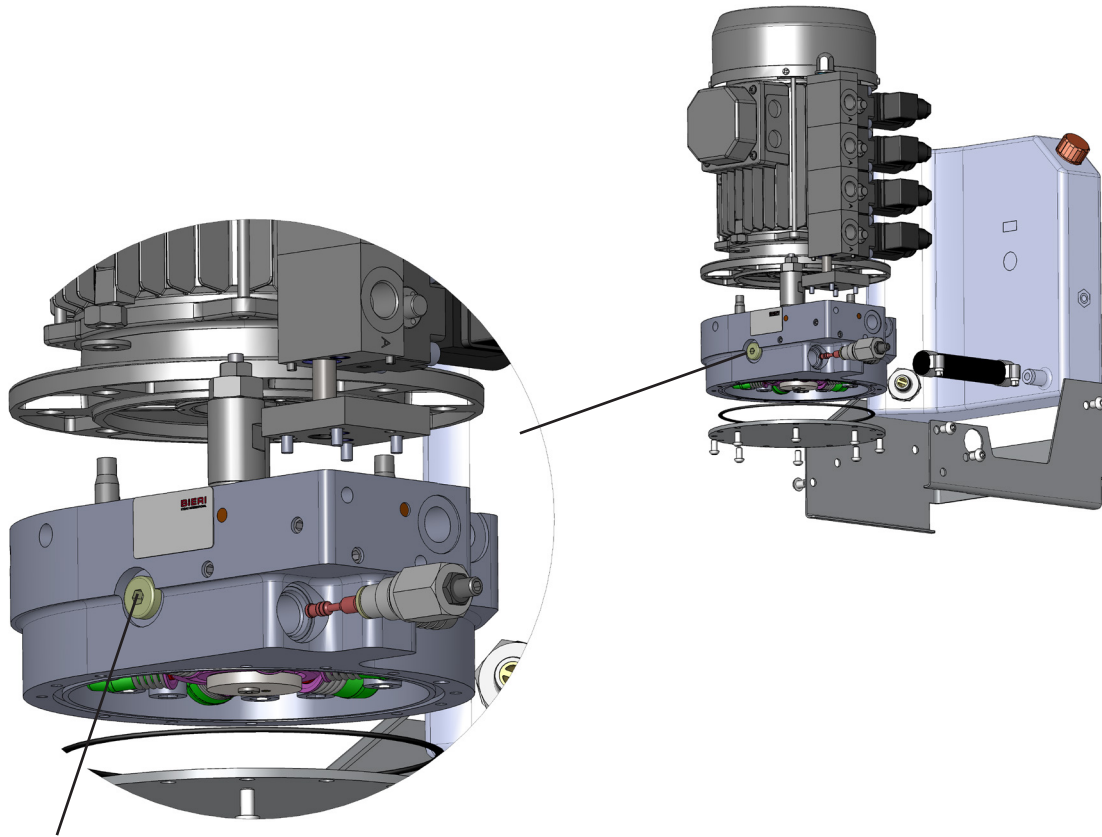

Air-vent screw

Unit interface for electric motor

according to IEC size 80 and connection flange B5

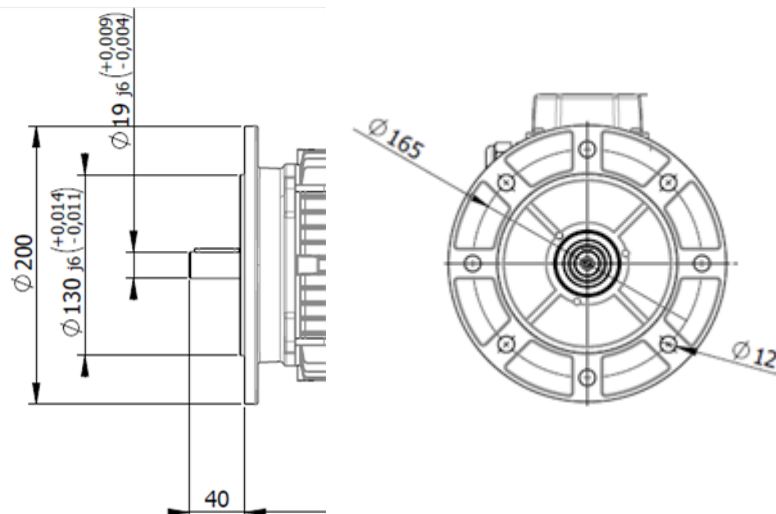

Type BKA
LP: 100 bar / 2,1 to 6,36 l/min HP: 700 bar / 0,38 to 2,04 l/min

Selection tables

1-stage unit (1500 1/min ; 1800 1/min)

Ordering example: BKA-E-415-1,1-**0,54**/700-2-X-00

Flow rate characteristics HP

Value to be entered in the type code (HP)	1500 1/min (50 Hz)	1800 1/min (60 Hz)	
Flow rate characteristics HP	Q (HP) [l/min]	Q (HP) [l/min]	Vg (HP) [cm ³ /rev]
0,28	0,38	0,45	0,28
0,38	0,53	0,63	0,38
0,54	0,75	0,90	0,54
0,84	1,20	1,44	0,84
1,2	1,70	2,04	1,2

1-stage unit (3000 1/min ; 3600 1/min)

Ordering example: BKA-E-430-1,1-**0,30**/700-2-X-00

Flow rate characteristics HP

Value to be entered in the type code (HP)	3000 1/min (50 Hz)	3600 1/min (60 Hz)	
Flow rate characteristics HP	Q (HP) [l/min]	Q (HP) [l/min]	Vg (HP) [cm ³ /rev]
0,14	0,38	0,45	0,14
0,21	0,57	0,68	0,21
0,3	0,83	0,99	0,3
0,46	1,20	1,44	0,46
0,64	1,70	2,04	0,64

2-stage unit (1500 1/min ; 1800 1/min)

Ordering example:

BKA-E-415-1,1-**0,62**/700-**3,08**/100-2-X-00

Flow rate characteristics HP

Flow rate characteristics LP

Value to be entered in the type code (HP)	1500 1/min (50 Hz)	1800 1/min (60 Hz)		Value to be entered in the type code (LP)	1500 1/min (50 Hz)	1800 1/min (60 Hz)	
Flow rate characteristics HP	Q (HP) [l/min]	Q (HP) [l/min]	Vg (HP) [cm ³ /rev]	Flow rate characteristics LP	Q (HP + LP) [l/min]	Q (HP + LP) [l/min]	Vg (HP + LP) [cm ³ /rev]
0,32	0,43	0,51	0,32	1,55	2,20	2,52	1,55
0,38	0,53	0,63	0,38	2,84	3,90	4,68	2,84
0,62	0,86	1,03	0,62	3,08	4,20	5,04	3,08
0,8	1,10	1,32	0,8	3,26	4,50	5,40	3,26
1,13	1,60	1,92	1,13	3,59	4,90	6,00	3,59

2-stage unit (3000 1/min ; 3600 1/min)

Ordering example:


BKA-E-430-1,1-**0,32**/700-**1,55**/100-2-X-00

Flow rate characteristics HP


Flow rate characteristics LP

Value to be entered in the type code (HP)	3000 1/min (50 Hz)	3600 1/min (60 Hz)		Value to be entered in the type code (LP)	3000 1/min (50 Hz)	3600 1/min (60 Hz)	
Flow rate characteristics HP	Q (HP) [l/min]	Q (HP) [l/min]	Vg (HP) [cm ³ /rev]	Flow rate characteristics LP	Q (HP + LP) [l/min]	Q (HP + LP) [l/min]	Vg (HP + LP) [cm ³ /rev]
0,15	0,43	0,51	0,15	0,77	2,10	2,64	0,77
0,22	0,61	0,73	0,22	1,12	3,40	3,84	1,12
0,32	0,85	1,02	0,32	1,55	4,20	5,04	1,55
0,44	1,20	1,44	0,44	1,67	4,60	5,64	1,67
0,62	1,70	2,04	0,62	1,85	5,10	6,36	1,85

Valve installation

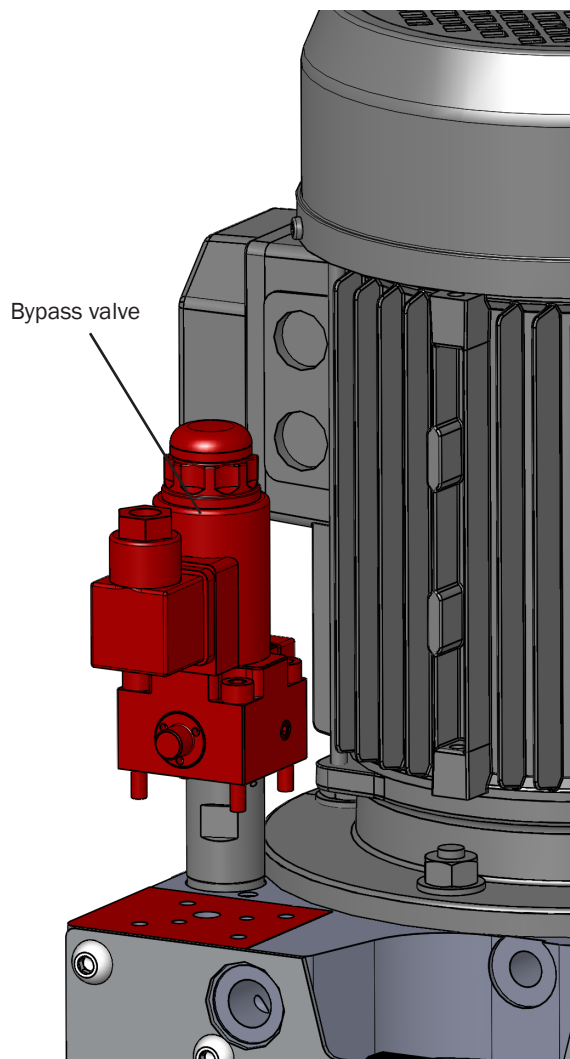


Bypass valve installation P-T
(Valve see data sheet WVM/WVH700)

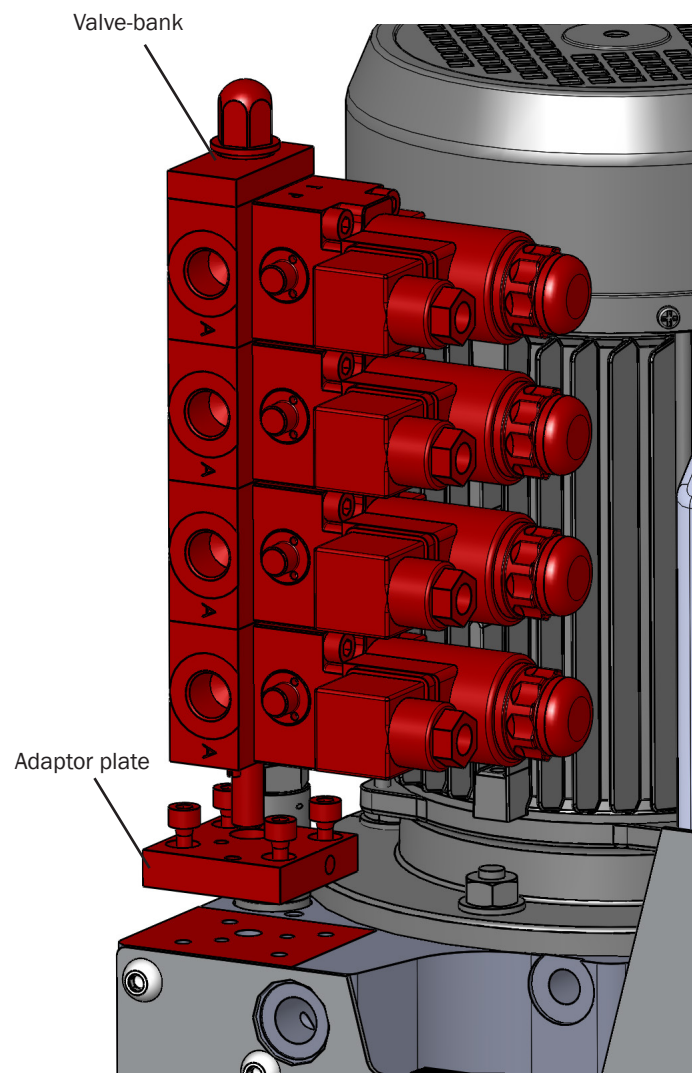

Installation valve-bank
(Valve see data sheet WVM/WVH700)


Drilling template

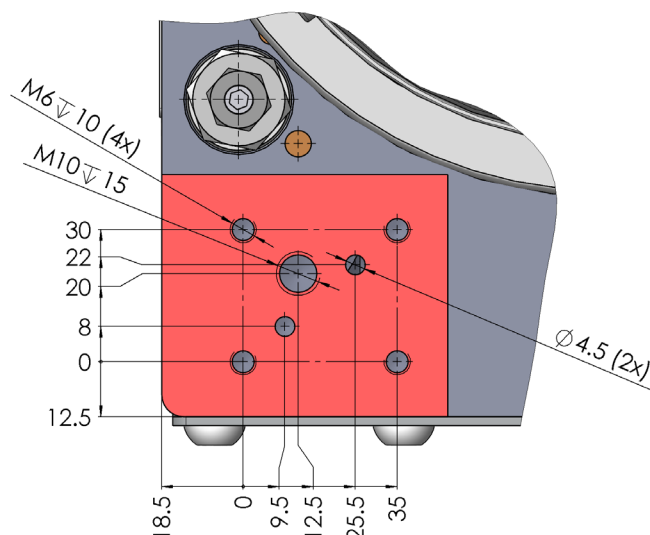


Type	Part. No
Adaptor plate	40027204

Functional schematic/diagram

Functional schematic

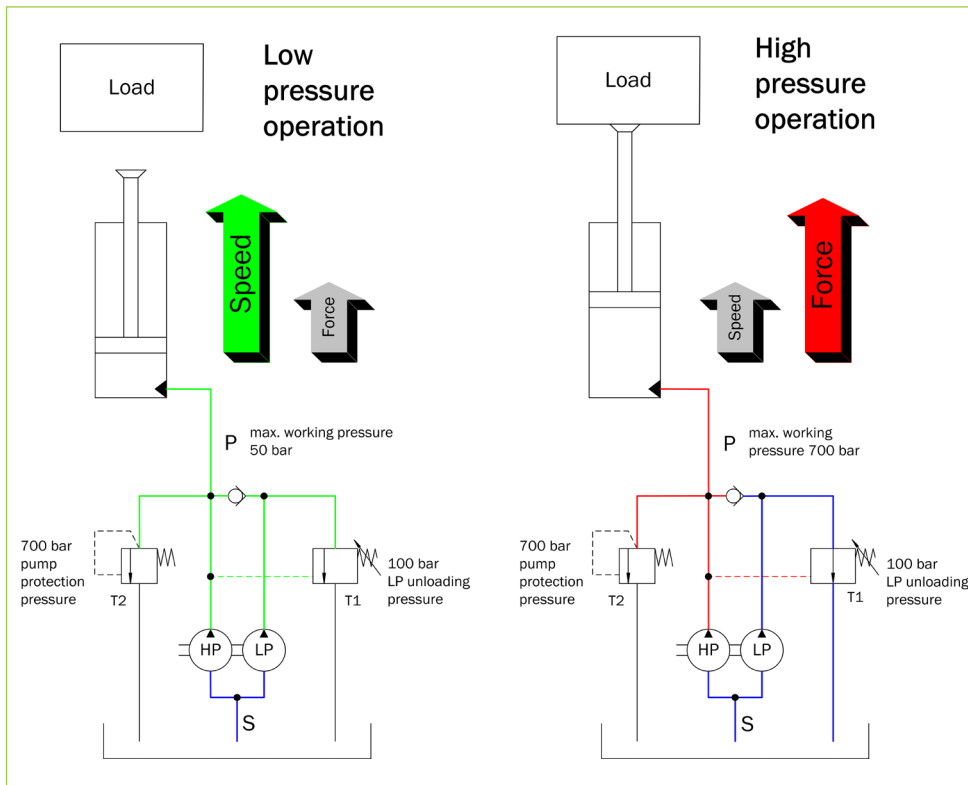

Pressure diagram

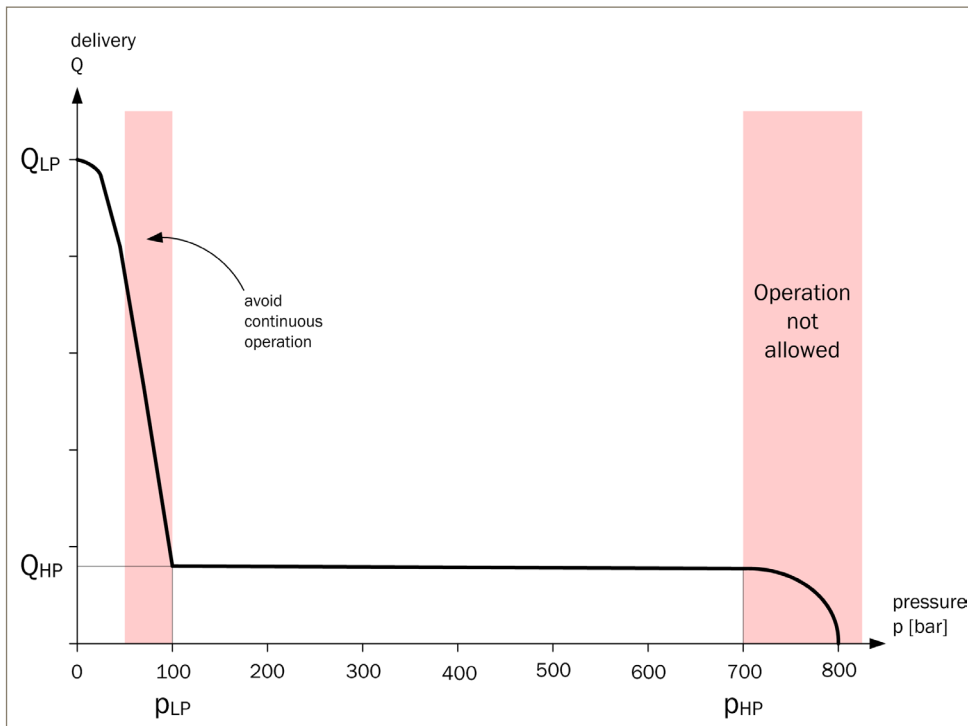

Bieri Hydraulik AG

Könizstrasse 274
CH-3097 Liebefeld
Tel. +41 31 970 09 09 | Fax +41 31 970 09 10
info@bierihydraulics.com | www.bierihydraulics.com

The information in this brochure relates to the operating conditions and applications described.
For applications and operating conditions not described, please contact the relevant technical department.
Subject to technical modifications.