

# CML2

Compact Twin Laser Contamination Monitor



## Description

### Automatic Particle Counters

#### Compact Twin Laser Contamination Monitor

The CML is a portable, accurate instrument-suitable for 'on-site' applications. It can automatically measure and display particulate contamination, moisture and temperature levels in various hydraulic fluids.



#### > Features & Benefits

- Compact
- Light and portable
- Mains Operated/battery (if fitted)
- Full Calibration based on ISO11171
- Measures and displays the following international standard formats: ISO 4406:2017, NAS 1638, AS 4059E and ISO 11218
- Data logging and 600 test result memory
- Manual and remote control flexibility

#### Scope of Supply

- 1 x CML2 (Specific model will be as per ordered item)
- 1 x M16x2 microbore pressure hose, 1500mm long
- 1 x Quick release waste hose for LPA2
- 1 x 1L waste receptacle
- 1 x 12V, 2A power adapter c/w UK/EU/US/AUS/CN heads
- 1 x 9 pin serial cable
- 1 x USB to serial converter
- 1 x Hard copy of product user guide
- 1 x Digital copy of user guides/software/drivers
- 2 x Hard copy of calibration certificate
- 1 x Carry bag

See Accessories at page 83.



Front facing view



Right facing view



Closed case  
Right facing view



Closed case  
Left facing view

## Technical data

### Technology

Twin laser and twin optical diode detectors Based Light Extinction Automatic Optical Contamination Monitor

### Particle Sizing

>4, 6, 14, 21, 25, 38, 50, 70  $\mu\text{m}_{(0)}$  to ISO 4406:2017 Standard

### Analysis range

ISO 4406:2017 Code 8 to 24

NAS 1638 Class 2 to 12

AS4059 Rev. E Table 1 Size Codes 2-12

AS4059 rev E, Table 2 Size Codes, A:000 to 12, B:00 to 12, C:00 to 12,

D:2 to 12, E: 4 to 12, F: 7 to 12

### Accuracy

Better than 3% typical

### Calibration

Each unit individually calibrated with ISO Medium Test Dust (MTD)

based on ISO 11171, on equipment certified by I.F.T.S. To ISO 11943

### Viscosity range

Up to 400 cSt

### Fluid temperature

From +5 °C to +80 °C

### Ambient Temperature

From -10 °C to +60 °C

### Temperature Measurement

$\pm 3$  °C

### Pressure

Minimum: 2 bar

Maximum: 400 bar

### Sample Volume / Test time

8 ml. (short): 2:50

15 ml. (normal): 5:00

30 ml. (dynamic): 10:00

24 ml. (bottle sampler): 8:00

15 ml. (continuous): 5:00

### Data Storage

600 tests

### Communication options

RS232 9 pin D plug

### Environmental Protection

IP51 (lid open)

### Moisture Sensing

% RH (Relative Humidity)  $\pm 3\%$

### Weight

6 kg

### Electrical Supply

Voltage 9-36V DC

### Power

Internal rechargeable battery (series 41)

### Outer Casing Finish

Injection Molded Ultra High Impact structural copolymer

### Wetted parts

M - C46400 Cu alloy, 316 stainless steel, FPM, FR4, sapphire.

N - 316 stainless steel, FPM, sapphire.

S - 316 stainless steel, perfluoro elastomer, sapphire, EPDM.

### Software

LPA View software (included)

## FOCUS ON

### Exclusive MP Filtri technology

The combination of the two lasers with the unique optics and photodiode package enables the CML2 to give increased accuracy combined with excellent repeatability.

### W-Option



Water Saturation level (RH%) and fluid temperature sensor option.

### Laser 1

A single point high accuracy laser measures particles of contamination at 4  $\mu\text{m}_{(c)}$  and 6  $\mu\text{m}_{(c)}$  giving increased accuracy with excellent repeatability.

### Laser 2


Standard accuracy laser specifically designed for system contaminants between 6  $\mu\text{m}_{(c)}$  and 70  $\mu\text{m}_{(c)}$ .

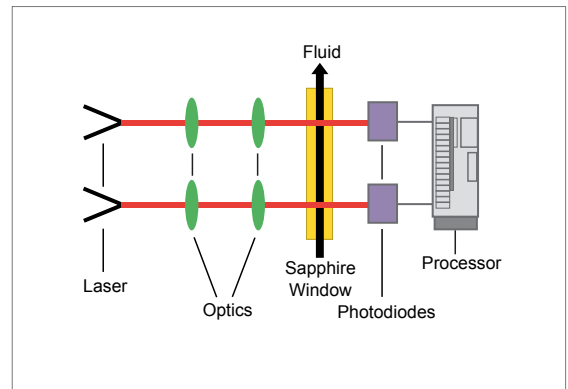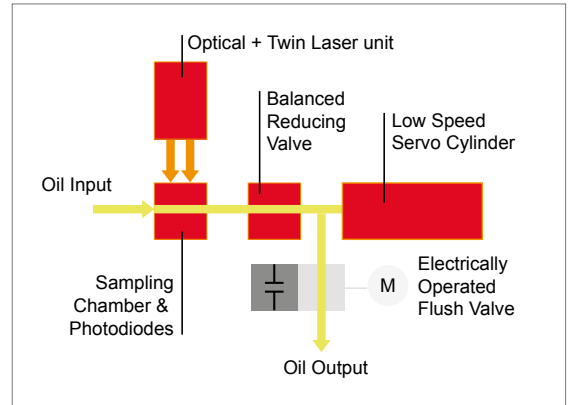


## LPA View Software

The LPA View software is used with the LPA3, LPA2, CML2 and ICM particle counters. When connected to LPA View, MP Filtri CMPs can transfer results in realtime, or alternatively, historical results can be downloaded from the CMP's inbuilt memory.

- Runs on Windows XP, 7, and Windows 10
- Full adjustment & control of product settings, test times and alarms
- Easy test report generation
- Trend analysis
- Graphical display options
- Universal format across our contamination monitoring product range

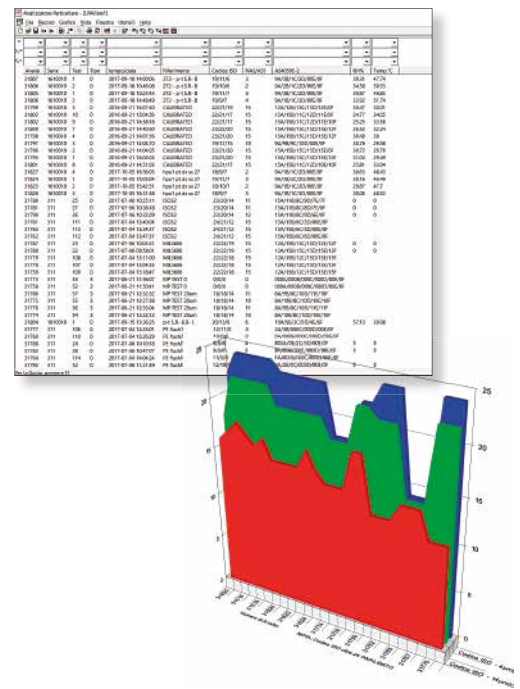

## Dimensions

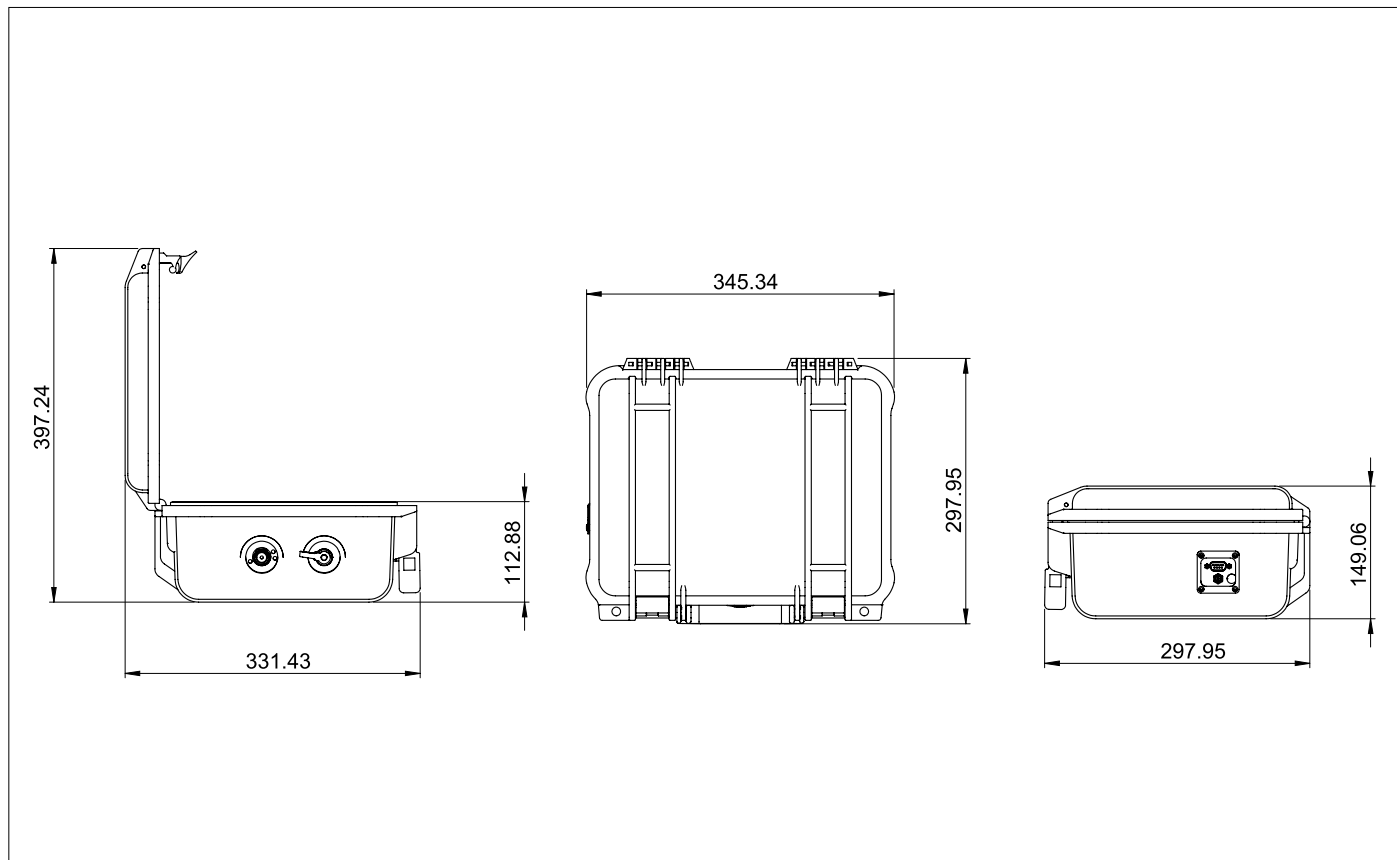

## Designation & Ordering code

### AUTOMATIC PARTICLE COUNTER CML2

Series	Configuration example:					
<b>CML2</b> Compact twin laser contamination monitor	CML2	W	M	S	X	41
<b>Moisture Sensor (RH%)</b>						
<b>0</b> Without moisture and temperature sensor						
<b>W</b> With moisture and temperature sensor						
<b>Fluid compatibility</b>						
<b>M</b> Mineral / synthetic oil						
<b>N</b> Subsea fluids and water based fluids (*)						
<b>S</b> Phosphate ester and aggressive fluids (*)						
<b>Option</b>						
<b>S</b> Standard units						
<b>Option bottle sampler</b>						
<b>X</b> Without bottle sampling						
<b>Series</b>						
<b>41</b> With display and push buttons, with internal rechargeable battery						

(\*) **N** and **S** version, moisture sensor (**W**) not available