

## Change-Over Filter NFD

up to 1600 l/min, up to 25 bar



### 1. TECHNICAL SPECIFICATIONS

#### 1.1 FILTER HOUSING

##### Construction

The filter housings are designed in accordance with international regulations. They consist of a filter housing and a threaded cover plate. The housings are connected by a ball change-over valve.

Standard equipment:

- connection for a clogging indicator in filter head

#### 1.2 FILTER ELEMENTS

HYDAC filter elements are validated and their quality is constantly monitored according to the following standards:

- ISO 2941
- ISO 2942
- ISO 2943
- ISO 3724
- ISO 3968
- ISO 11170
- ISO 16889

#### Contamination retention capacities in g

NFD	Elements per side	Betamicon® (BN4HC)			
		3 µm	5 µm	10 µm	20 µm
1340	1x1300 R	181.0	200.7	241.4	273.1
2640	1x2600 R	369.4	409.4	492.5	557.2
5240	2x2600 R	738.8	818.8	985.0	1114.4
7840	3x2600 R	1108.2	1228.2	1477.5	1671.6
10440	4x2600 R	1477.6	1637.6	1970.0	2228.8

Filter elements are available with the following pressure stability values:

Betamicon® (BN4HC):	20 bar
ECOMicon® (ECON2):	10 bar
Stainl. steel wire mesh (W/HC):	20 bar
Stainless steel fibre (V):	210 bar
Paper (P/HC):	10 bar
Betamicon®/Aquamicron® (BN4AM):	10 bar
Aquamicron® (AM):	10 bar

#### 1.3 FILTER SPECIFICATIONS

Nominal pressure	25 bar
Max. operating pressure	30 bar at max. 10 <sup>6</sup> cycles
Temperature range	-10 °C to +100 °C
Material of filter head, tube and cover plate	Aluminium
Material of change-over valve, elbow and connection piece	EN-GJS-400-15
Type of clogging indicator	VM (differential pressure measurement)
Pressure setting of the clogging indicator	2 bar (others on request)
Bypass cracking pressure	3 bar (others on request)

#### 1.4 SEALS

NBR (=Perbunan)

#### 1.5 INSTALLATION

Inline filter

#### 1.6 SPECIAL MODELS AND ACCESSORIES

- Seals in FPM
- NFD filter as tank-top return line filter (type code 1.x) on request

#### 1.7 SPARE PARTS

See Original Spare Parts List

#### 1.8 CERTIFICATES AND APPROVALS

On request


#### 1.9 COMPATIBILITY WITH HYDRAULIC FLUIDS ISO 2943

- Hydraulic oils H to HLPD DIN 51524
- Lubrication oils DIN 51517, API, ACEA, DIN 51515, ISO 6743
- Compressor oils DIN 51506
- Biodegradable operating fluids VDMA 24568 HETG, HEES, HEPG
- Fire-resistant fluids HFA, HFB, HFC and HFD
- Operating fluids with high water content (> 50 % water content) on request

#### 1.10 IMPORTANT INFORMATION

- Filter housings must be earthed.
- When using visual clogging indicators, the BM version (visual with manual reset) only should be used.
- When using electrical clogging indicators, the electrical power supply to the system must be switched off before removing the clogging indicator connector.

#### Symbol for hydraulic systems

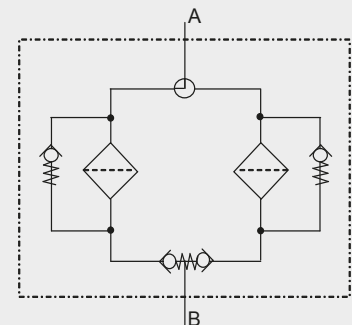

## 2. MODEL CODE (also order example)

NFD BN/HC 2640 D A P 10 D 2 . X /-L24

### 2.1. COMPLETE FILTER

**Filter type** \_\_\_\_\_

NFD

**Filter material** \_\_\_\_\_

BN/HC	Betamicon® (BN4HC)	P/HC	Paper
ECO/N	ECOmicon® (ECON2)	BN/AM	Betamicon®/Aquamicron®
W/HC	Stainless steel wire mesh	AM	Aquamicron®
V	Stainless steel fibre		

**Size of filter or element** \_\_\_\_\_

NFD: 1340, 2640, 5240, 7840, 10440

**Operating pressure** \_\_\_\_\_

D = 25 bar

**Type of change-over** \_\_\_\_\_

A = Ball

**Type and size of port** \_\_\_\_\_

Type	Port	Filter size				
		1340	2640	5240	7840	10440
P	SAE DN 100	●	●	●	●	●

Other types and sizes of port on request!  
For examples, see point 3.3

**Filtration rating in µm** \_\_\_\_\_

BN/HC, ECO/N, V:	3, 5, 10, 20	P/HC:	10, 20	AM:	40
W/HC:	25, 50, 100, 200	BN/AM:	3, 10		

**Type of clogging indicator** \_\_\_\_\_

Y	plastic blanking plug in indicator port	] for other clogging indicators see brochure no. 7.050../..
A	steel blanking plug in indicator port	
BM	visual	
C	electrical	
D	visual and electrical	

**Type code (TKZ)** \_\_\_\_\_

2

**Modification number** \_\_\_\_\_

X the latest version is always supplied

**Supplementary details** \_\_\_\_\_

B.	special cracking pressure of bypass (e. g.: B6 = 6 bar)	] only for clogging indicators type "D"
EM	manual vent with shut-off valve	
EP	permanent vent via Minimess hose	
KB	without bypass valve	
L...	light with appropriate voltage (24, 48, 110, 220 Volt)	
LED	2 light emitting diodes up to 24 Volt	
SB4	filling line with Ø4 mm orifice	
V	FPM seals	
VKD	drain fitted with ball shut-off valve	
39	connection alternative (see point 2.4)	

### 2.2 REPLACEMENT ELEMENT

2600 R 010 BN4HC /-V

**Size** \_\_\_\_\_

1300, 2600

**Type** \_\_\_\_\_

**Filtration rating in µm** \_\_\_\_\_

BN4HC, ECON2, V:	003, 005, 010, 020	P/HC:	010, 020	AM:	040
W/HC:	025, 050, 100, 200	BN4AM:	003, 010		

**Filter material** \_\_\_\_\_

BN4HC, ECON2, V, W/HC, P/HC, BN4AM, AM

**Supplementary details** \_\_\_\_\_

V (for descriptions, see point 2.1)

### 2.3 REPLACEMENT CLOGGING INDICATOR

VM 2 D . X /-L24

**Type** \_\_\_\_\_

VM differential pressure measurement up to 210 bar operating pressure

**Pressure setting** \_\_\_\_\_

2 standard 2 bar, others on request

**Type of clogging indicator** (see point 2.1) \_\_\_\_\_

**Modification number** \_\_\_\_\_

X the latest version is always supplied

**Supplementary details** \_\_\_\_\_

L..., LED, V (for descriptions, see point 2.1)

## 2.4 CONNECTION ALTERNATIVES

(also order example)

### Supplementary detail .. / - 0 3

1st digit = position of inlet valve

2nd digit = position of outlet valve



**33**  
Standard

#### Standard model:

Not given as a supplementary detail in the model code


**63**

Not available!

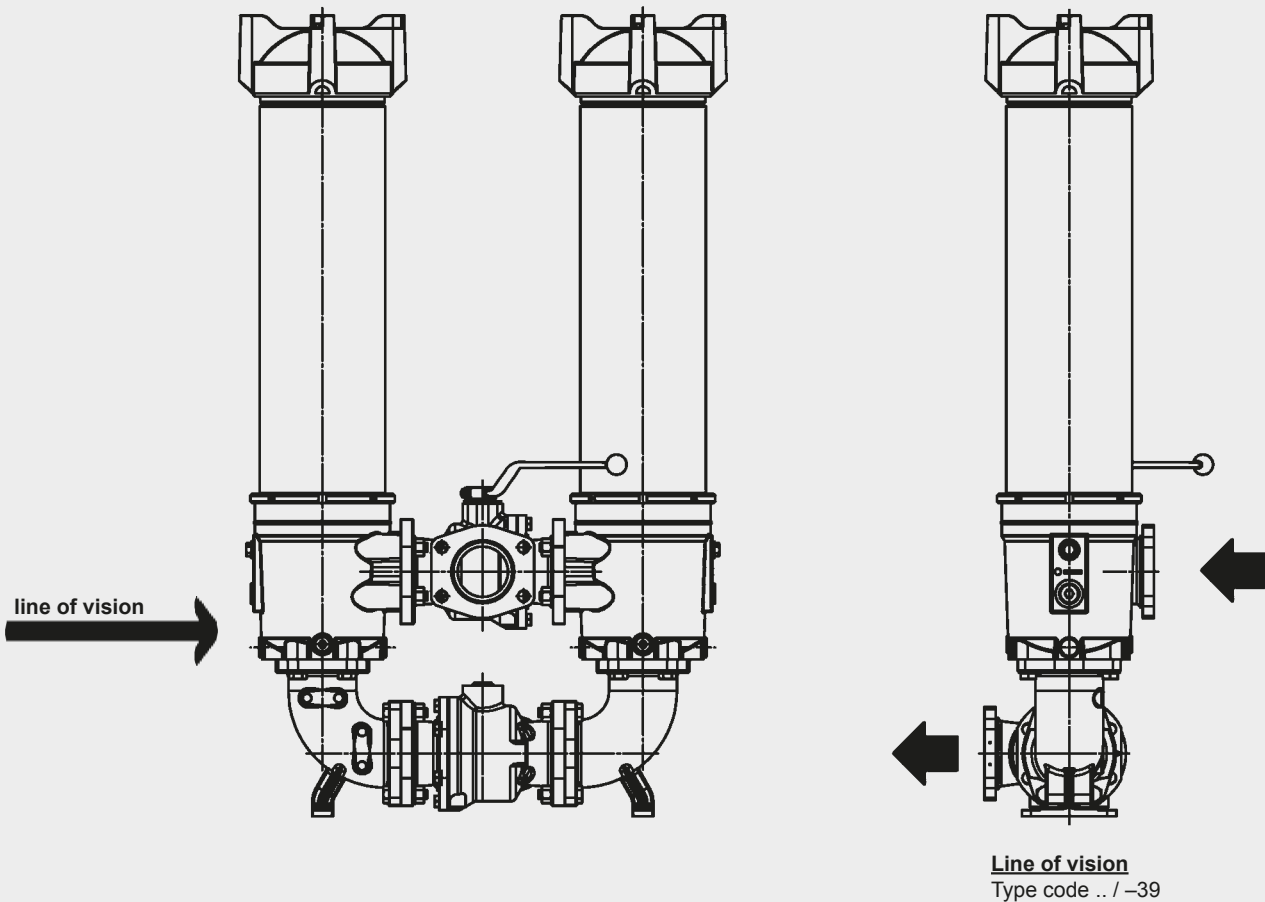

### NFD 2640 .. A 2.0 / -XX

(possible supplementary detail)

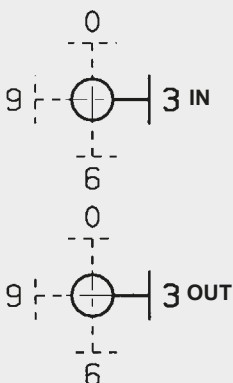


00	03	06	09 <sup>1)</sup>
30	<b>33</b> Standard	36	39
60	63	66	69
90	93	96	99 <sup>3)</sup>

- 1) corresponds to type 03
- 2) corresponds to type 39
- 3) corresponds to type 33

### NFD 5240 .. A 2.0 / -XX

(possible supplementary detail)



00	03	06	09
30	<b>33</b> Standard	36	39
60	63	66	69
90	93	96	99

### 3. FILTER CALCULATION / SIZING

The total pressure drop of a filter at a certain flow rate Q is the sum of the housing  $\Delta p$  and the element  $\Delta p$  and is calculated as follows:

$$\Delta p_{\text{total}} = \Delta p_{\text{housing}} + \Delta p_{\text{element}}$$

$\Delta p_{\text{housing}}$  = given in diagrams (see point 3.1)

$$\Delta p_{\text{element}} = Q \cdot SK^*/1000 \cdot \text{viscosity}/30$$

(\*see point 3.2)


For ease of calculation, our Filter Sizing Program is available on request free of charge.

**NEW:** Sizing online at [www.hydac.com](http://www.hydac.com)


#### 3.1 $\Delta p$ -Q HOUSING CURVES BASED ON ISO 3968

The housing curves apply to mineral oil with a density of 0.86 kg/dm<sup>3</sup> and a kinematic viscosity of 30 mm<sup>2</sup>/s. In this case, the differential pressure changes proportionally to the density.


##### NFD 1340 / 2640

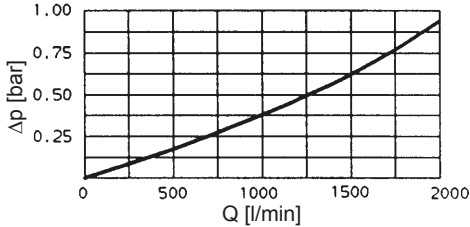


##### NFD 5240

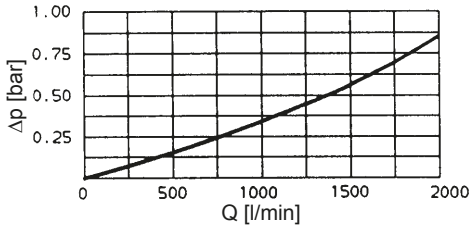

##### NFD 7840

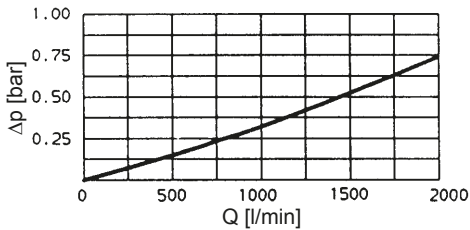

##### NFD 10440

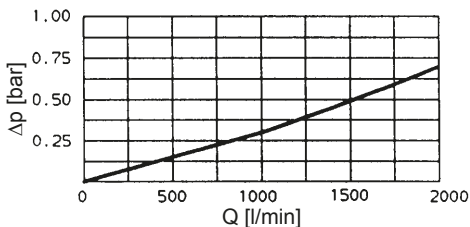


### 3.2 GRADIENT COEFFICIENTS (SK) FOR FILTER ELEMENTS


The gradient coefficients in mbar/(l/min) apply to mineral oils with a kinematic viscosity of 30 mm<sup>2</sup>/s. The pressure drop changes proportionally to the change in viscosity.

NFD	V				W/HC	ECON2			
	3 μm	5 μm	10 μm	20 μm		3 μm	5 μm	10 μm	20 μm
1300	0.5	0.4	0.3	0.2	0.034	0.8	0.6	0.4	0.3
2600	0.3	0.2	0.1	0.1	0.017	0.4	0.3	0.2	0.1

#### BN4HC: 1300 R...

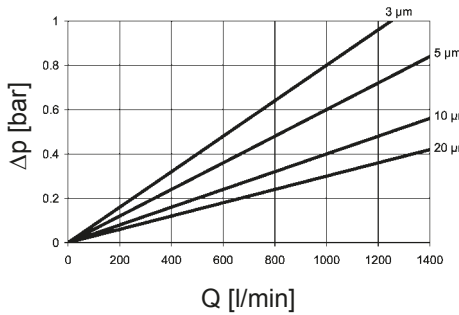


#### BN4HC: 2600 R...

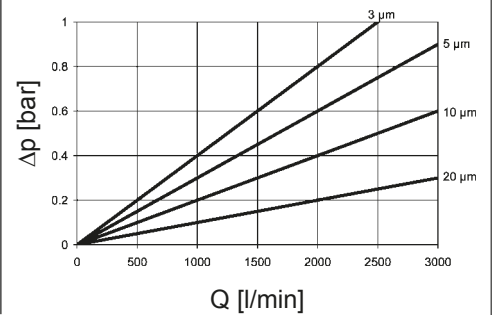


### 3.3 OTHER CONNECTION SIZES AND TYPES ON REQUEST!

Examples:

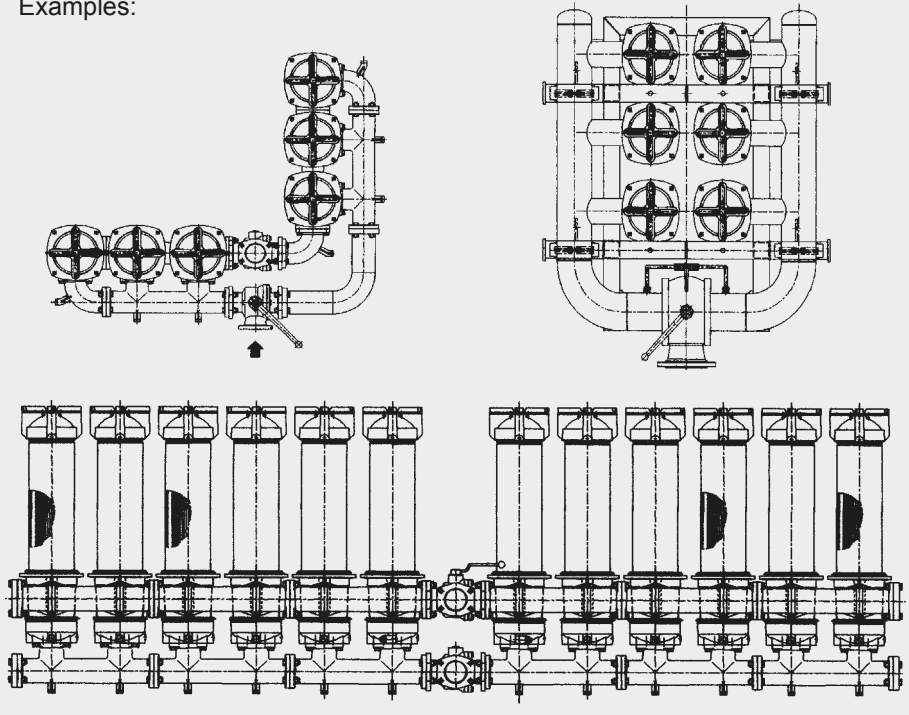


## 4. DIMENSIONS

NFD 1340/2640

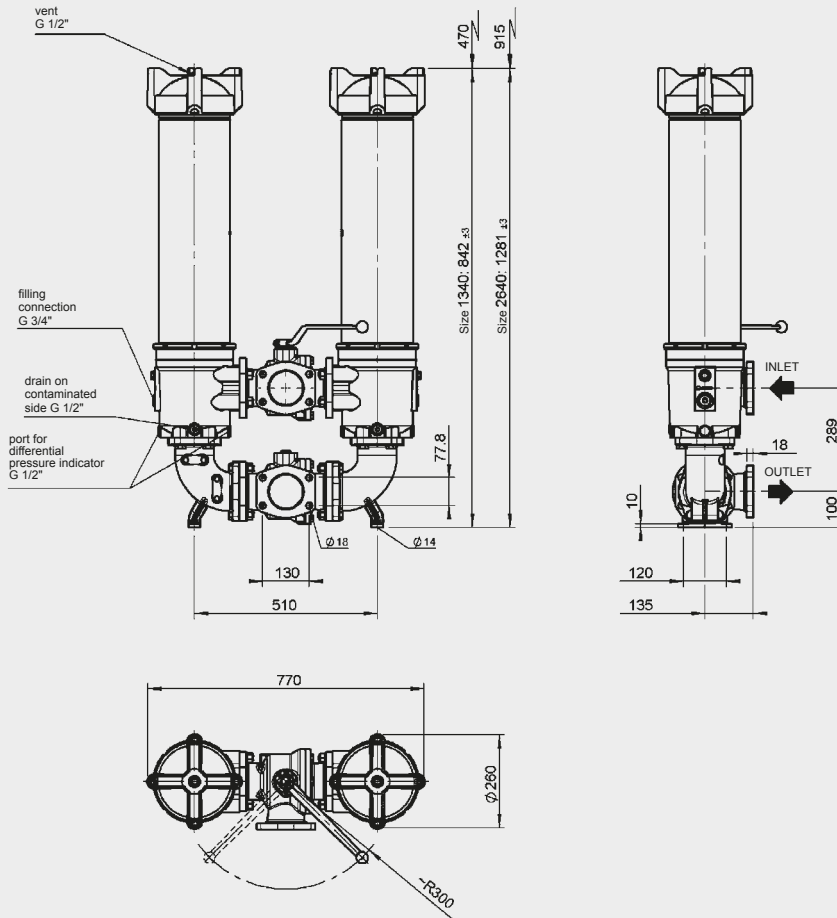


NFD	No. of elements per side	Weight incl. element [kg]	Vol. of pressure chamber [l]
1340...2.X	1x 1300 R...	122.7	35.8
2640...2.X	1x 2600 R...	140.0	58.1

NFD 5240



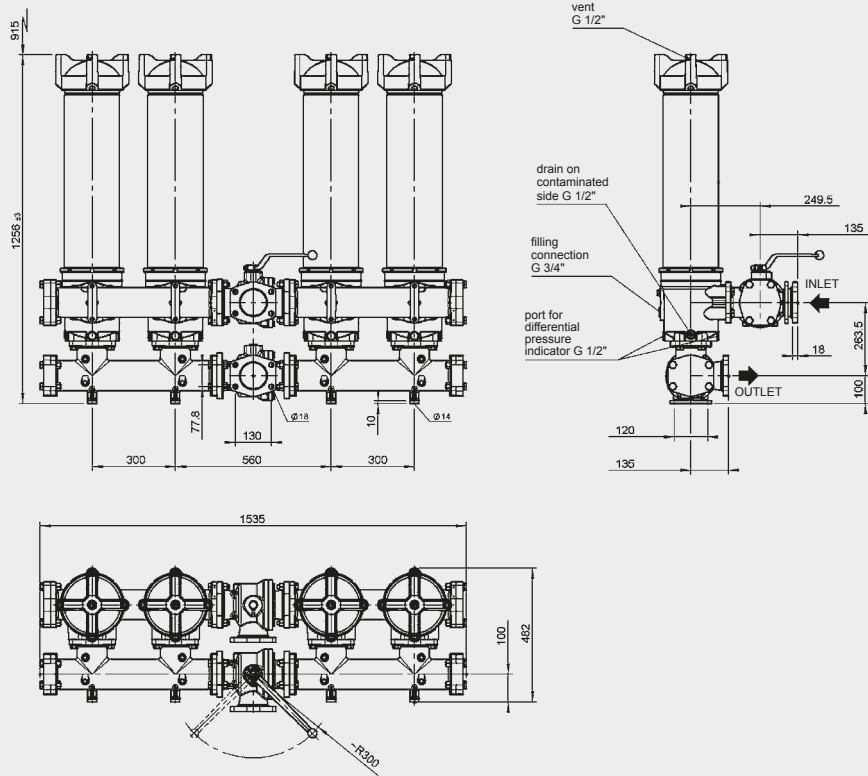


NFD 5240...2.X /-1+2



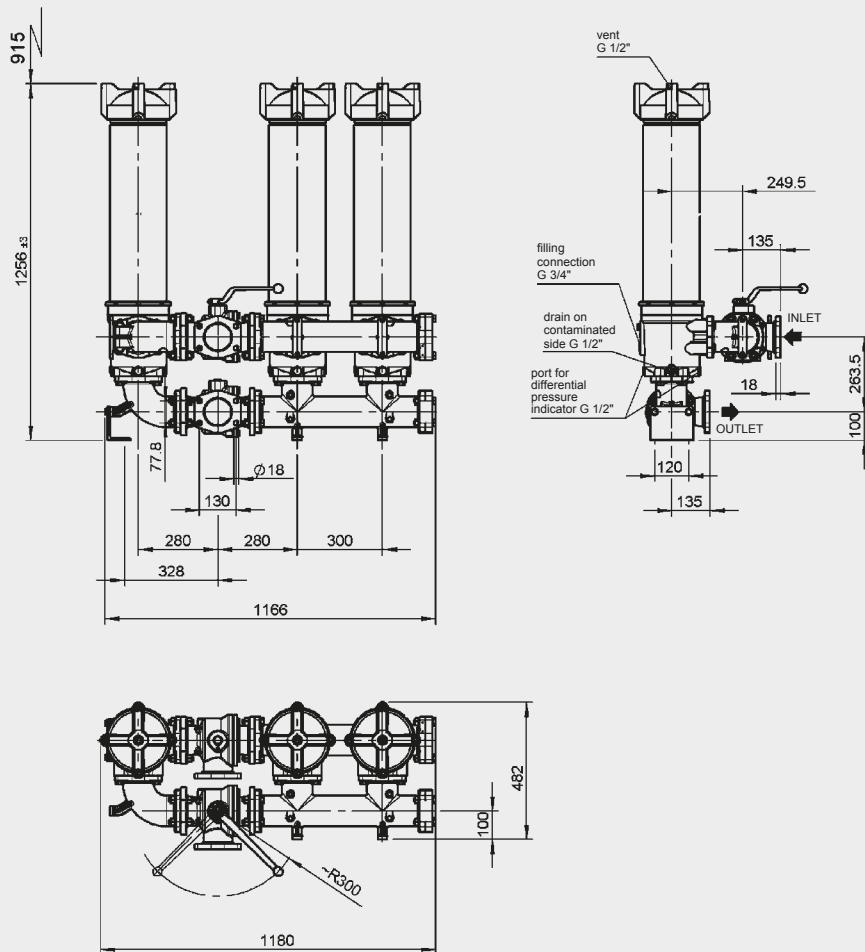


NFD	No. of elements per side	Weight incl. element [kg]	Vol. of pressure chamber [l]
5240...2.X	2x 2600 R...	276.8	126.4
5240../-1+2...2.X	1x 2600 R... and 2x 2600 R...	217.4	94.3

NFD 7840

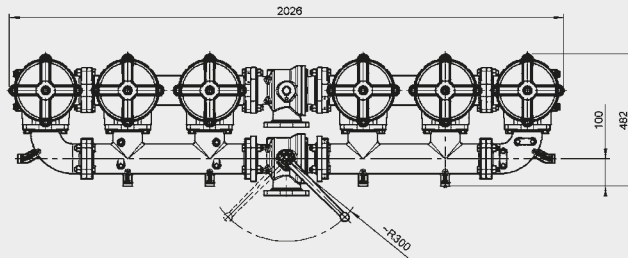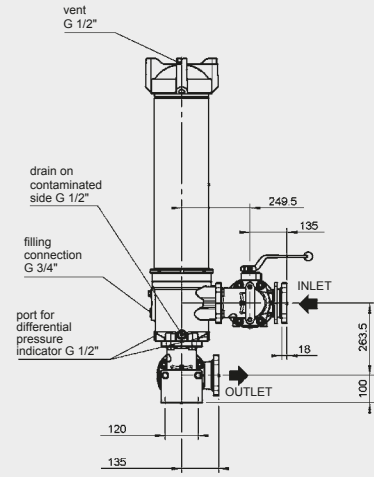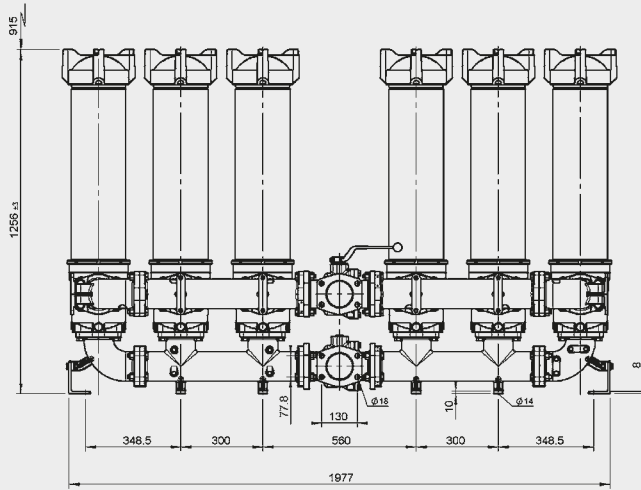


NFD 7840...2.X /-3+1

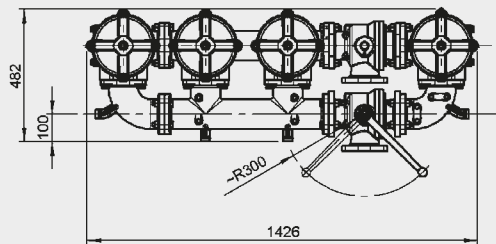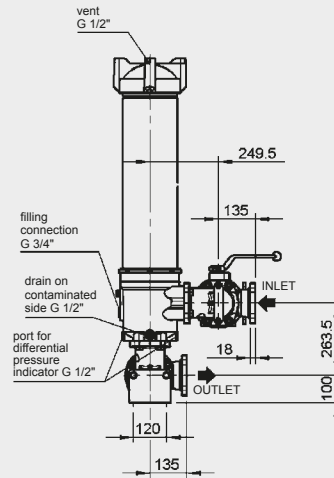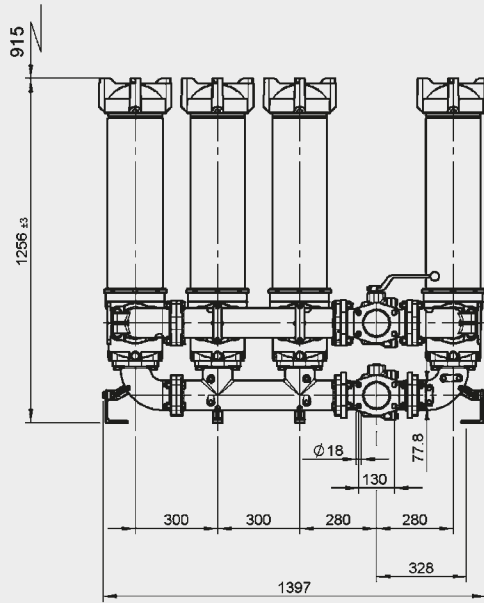


NFD	No. of elements per side	Weight incl. element [kg]	Vol. of pressure chamber [l]
7840	3x 2600 R...	391.6	182.8
7840../-3+1	3x 2600 R... and 1x 2600 R...	286.6	122.2

# NFD 10440

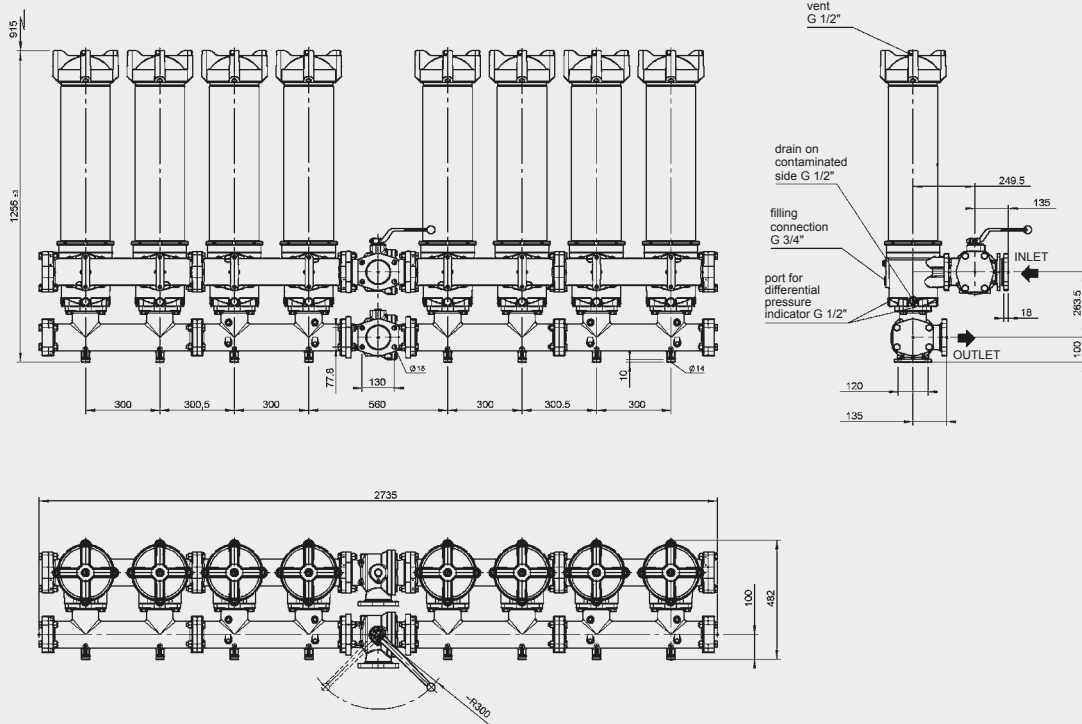

# NFD 10440...2.X /-1+4

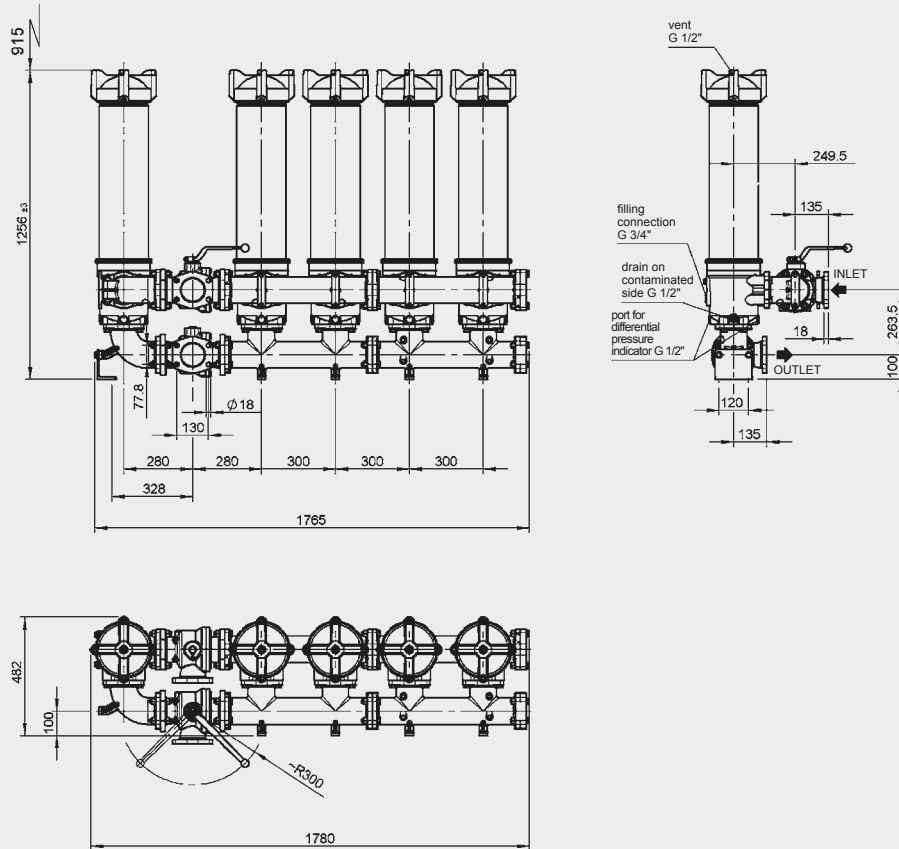

NFD	No. of elements per side	Weight incl. element [kg]	Vol. of pressure chamber [l]
10440	4x 2600 R...	510.4	251.0
10440../-1+4	1x 2600 R... and 4x 2600 R...	328.3	154.0

## NOTE

The information in this brochure relates to the operating conditions and applications described. For applications or operating conditions not described, please contact the relevant technical department. Subject to technical modifications.

**HYDAC Filbertechnik GmbH**  
 Industriegebiet  
**D-66280 Sulzbach/Saar**  
 Tel.: 0 68 97 / 509-01  
 Fax: 0 68 97 / 509-300  
 Internet: [www.hydac.com](http://www.hydac.com)  
 E-Mail: [filter@hydac.com](mailto:filter@hydac.com)