




Inline Filter RFL Cast Version up to 1300 l/min, up to 40 bar

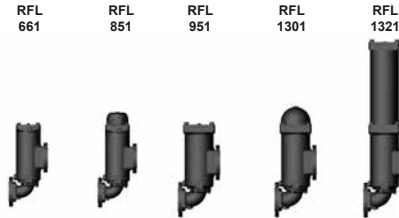

1. TECHNICAL SPECIFICATIONS

1.1 FILTER HOUSING

Construction

The filter housings are designed in accordance with international regulations. They consist of a two-piece filter housing with a bolt-on cover plate.

Standard equipment:

- connections for venting and draining
- connection for a clogging indicator

1.2 FILTER ELEMENTS

HYDAC filter elements are validated and their quality is constantly monitored according to the following standards:

- ISO 2941
- ISO 2942
- ISO 2943
- ISO 3724
- ISO 3968
- ISO 11170
- ISO 16889

Contamination retention capacities in g

		Betamicon® (BN4HC)			
RFL	Elements	3 µm	5 µm	10 µm	20 µm
66x	1x0660 R	87.1	96.5	116.1	131.3
85x	1x0850 R	112.1	124.2	149.5	169.1
95x	1x0950 R	130.0	144.1	173.3	196.1
130x	1x1300 R	181.0	200.7	241.4	273.1
132x	1x2600 R	369.4	409.4	492.5	557.2

Filter elements are available with the following pressure stability values:

Betamicon® (BN4HC):	20 bar
Optimicon® Power (ON/PO):	10 bar
Paper (P/HC):	10 bar
Wire mesh (W/HC):	20 bar
Stainless steel fibre (V):	30 bar
Betamicon®/Aquamicron® (BN4AM):	10 bar
Aquamicron® (AM):	10 bar

1.3 FILTER SPECIFICATIONS

Nominal pressure	25 bar 40 bar (RFL 662 to 1322 to AD)
Temperature range	-10 °C to +100 °C
Material of filter housing and cover plate	EN-GJS-400-15 : RFL 661 to 1321 GP 240 GH+N : RFL 662 to 1322 On RFL 1321 and 1322 the extension is in steel!
Type of clogging indicator	VM (differential pressure measurement up to 210 bar operating pressure)
Pressure setting of the clogging indicator	2 bar (others on request)
Bypass cracking pressure	3 bar (others on request)

1.4 SEALS

NBR (=Perbunan)

1.5 INSTALLATION

Inline filter

1.6 SPECIAL MODELS AND ACCESSORIES

- Inlet and outlet positioned one above the other
- Counter flanges as welding or blank flanges

1.7 SPARE PARTS

See Original Spare Parts List

1.8 CERTIFICATES AND APPROVALS

These filters can be supplied with manufacturer's test certificates O and M to DIN 55350, Part 18.

Test certificates 3.1 to DIN EN 10204 and approval certificates (Type Approval) for different approval authorities. Areas of application, amongst others: lubrication.

Filter to API 614 (ANSI flange) on request!


1.9 COMPATIBILITY WITH HYDRAULIC FLUIDS ISO 2943

- Hydraulic oils H to HLPD DIN 51524
- Lubrication oils DIN 51517, API, ACEA, DIN 51515, ISO 6743
- Compressor oils DIN 51506
- Biodegradable operating fluids VDMA 24568 HETG, HEES, HEPG
- Fire-resistant fluids HFA, HFB, HFC and HFD
- Operating fluids with high water content (> 50 % water content) on request

1.10 IMPORTANT INFORMATION

- Filter housings must be earthed.
- When using electrical clogging indicators, the electrical power supply to the system must be switched off before removing the clogging indicator connector.
- Filters must be flexibly mounted and not fixed rigidly to the floor or used as a pipe support.
- When used with W/HC and P/HC elements, please follow the sizing recommendation under point 3.3!

Symbol for hydraulic systems



2. MODEL CODE (also order example)

RFL BN/HC 851 D N 10 D 1 . X /-L24

2.1 COMPLETE FILTER

Filter type _____

RFL

Filter material of element _____

BN/HC Betamicon® (BN4HC) P/HC Paper AM Aquamicon®
 V Stainless steel fibre W/HC Wire mesh BN/AM Betamicon®/Aquamicon®
 ON/PO Optimicon® Power *

Size of filter or element _____

RFL: 661, 662, 851, 951, 952, 1301, 1302, 1321, 1322

Operating pressure _____

D = 25 bar

E = 40 bar (RFL 662-1322 according to AD)

Type and size of connection _____

Type	Connection	Filter size				
		661	851	951	1301	1321
		662		952	1302	1322
N	SAE DN 80 (3")	●	●			
P	SAE DN 100 (4")			●	●	●
Q	DIN DN 80	●	●			
R	DIN DN 100			●	●	●

Other nominal bores on request

Filtration rating in µm _____

BN/HC, ON/PO*, V: 3, 5, 10, 20 P/HC: 10, 20 AM: 40
 W/HC: 25, 50, 100, 200 BN/AM: 3, 10

Type of clogging indicator _____

Y plastic blanking plug in indicator port
 A steel blanking plug in indicator port
 B visual
 C electrical
 D visual and electrical
 for other clogging indicators, see brochure no. 7.050../..

Type code _____

1

Modification number _____

X the latest version is always supplied

Supplementary details _____

B. special cracking pressure of bypass (e.g. B1 = 1 bar)
 GA counter flange as welding flange
 GB counter flange as blank flange
 KB without bypass valve
 L... light with appropriate voltage (24V, 48V, 110V, 220V) only for clogging indicators type "D"
 LED 2 light emitting diodes up to 24 Volt
 OR O-ring groove on the DIN flange (inlet and outlet) to Rexroth standard AB 22-04
 V FPM seals
 33 inlet and outlet positioned one above the other
 SAK contamination retainer

2.2 REPLACEMENT ELEMENT

0850 R 010 BN4HC /-V

Size _____

0660, 0850, 0950, 1300, 2600

Type _____

R

Filtration rating in µm _____

BN4HC, ON/PO *, V: 003, 005, 010, 020 P/HC: 010, 020 AM: 040
 W/HC: 025, 050, 100, 200 BN4AM: 003, 010

Filter material _____

BN4HC, ON/PO *, V, W/HC, P/HC, BN4AM, AM

Supplementary details _____

V (for descriptions, see point 2.1)

2.3 REPLACEMENT CLOGGING INDICATOR

VM 2 D . X /-L24

Type _____

VM differential pressure measurement up to 210 bar operating pressure

Pressure setting _____

2 standard 2 bar, others on request

Type of clogging indicator (see Point 2.1) _____

Modification number _____

X the latest version is always supplied

Supplementary details _____

L..., LED, V (for descriptions, see point 2.1)

* Optimicon® Power only in filtration rating 5, 10 and 20 µm

3. FILTER CALCULATION / SIZING

The total pressure drop of a filter at a certain flow rate Q is the sum of the housing Δp and the element Δp and is calculated as follows:

$$\Delta p_{\text{total}} = \Delta p_{\text{housing}} + \Delta p_{\text{element}}$$

$$\Delta p_{\text{housing}} = (\text{see Point 3.1})$$

$$\Delta p_{\text{element}} = Q \cdot \frac{SK^*}{1000} \cdot \frac{\text{viscosity}}{30}$$

(*see point 3.2)


For ease of calculation, our Filter Sizing Program is available on request free of charge.

NEW: Sizing online at www.hydac.com


3.1 Δp -Q HOUSING CURVES BASED ON ISO 3968

The housing curves apply to mineral oil with a density of 0.86 kg/dm³ and a kinematic viscosity of 30 mm²/s. In this case, the differential pressure changes proportionally to the density.

RFL 661, 662, 851

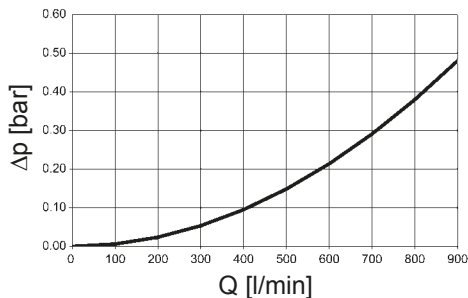

RFL 951, 952, 1301, 1302, 1321, 1322

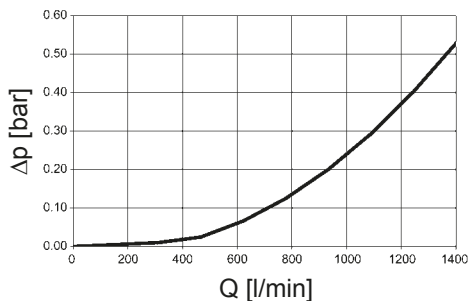


3.2 GRADIENT COEFFICIENTS (SK) FOR FILTER ELEMENTS


The gradient coefficients in mbar/(l/min) apply to mineral oils with a kinematic viscosity of 30 mm²/s. The pressure drop changes proportionally to the change in viscosity.

RFL	V				W/HC	ON/PO		
	3 μm	5 μm	10 μm	20 μm	-	5 μm	10 μm	20 μm
660	1.0	0.8	0.6	0.4	0.067	0.35	0.30	0.19
850	0.8	0.6	0.4	0.3	0.052	0.28	0.24	0.16
950	0.7	0.6	0.4	0.2	0.048	0.25	0.21	0.14
1300	0.5	0.4	0.3	0.2	0.034	0.18	0.15	0.10
2600	0.3	0.2	0.1	0.1	0.017	0.08	0.07	0.05


BN4HC: RFL 660

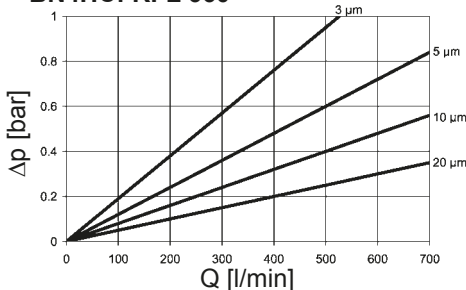


BN4HC: RFL 1300

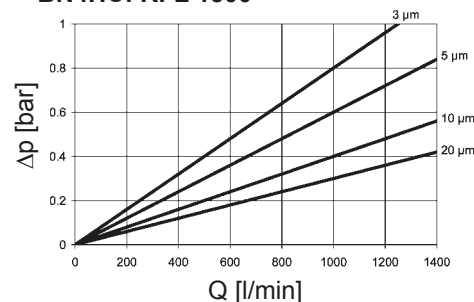


BN4HC: RFL 850

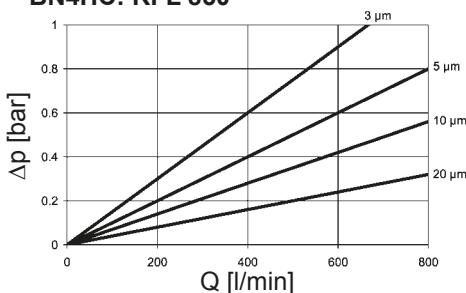

BN4HC: RFL 2600

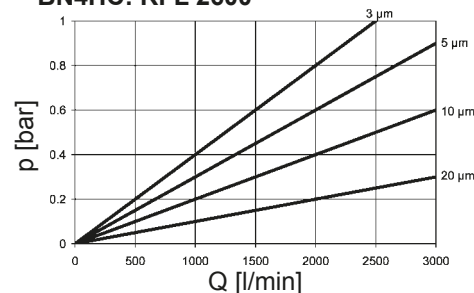


BN4HC: RFL 950

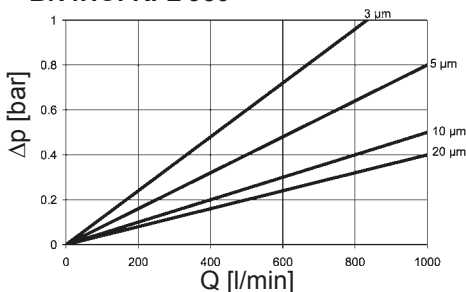

3.3 SIZING RECOMMENDATION

Filter type	Connection	Q _{max} when using W/HC and P/HC elements
RFL 661/662	DIN DN 80	480 l/min
	SAE DN 80	480 l/min
RFL 851	DIN DN 80	480 l/min
	SAE DN 80	480 l/min
RFL 951/952	DIN DN 100	900 l/min
	SAE DN 100	900 l/min
RFL 1301/1302/1321/1322	DIN DN 100	900 l/min
	SAE DN 100	900 l/min

4. DIMENSIONS

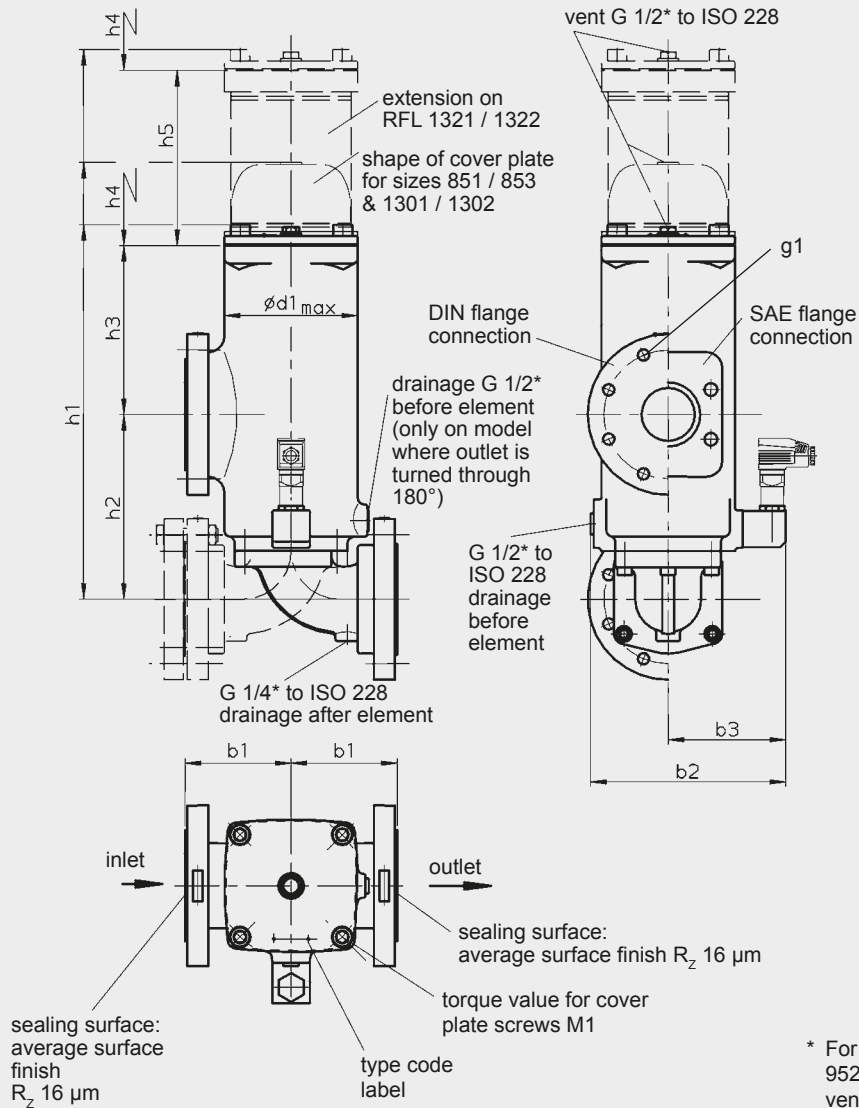

* For sizes RFL 662, 952, 1302 and 1322: vent/drain G 3/4

RFL	Flange connection	b1	b2	b3	d1	h1	h2	h3	h4	h5	M1 (Nm)	g1	Weight including element [kg]	Volume of pressure chamber [l]
661	SAE DN 80 DIN DN 80	133	243	147	166	465	230	210	350	-	150	M16 M16	36	8.2
662	SAE DN 80 DIN DN 80	133	238	144	177	465	230	210	350	-	150	M16 M16	42	8.2
851	SAE DN 80 DIN DN 80	133	243	147	166	552	230	210	420	-	150	M16 M16	38.5	9.5
951	SAE DN 100 DIN DN 100	143	271	161	194	523	250	238	380	-	250	M16 M20	54	13
952	SAE DN 100 DIN DN 100	143	264	157	200	523	250	238	380	-	250	M16 M20	67.5	13
1301	SAE DN 100 DIN DN 100	143	271	161	194	630	250	238	500	-	250	M16 M20	55.5	16
1302	SAE DN 100 DIN DN 100	143	264	157	200	630	250	238	500	-	250	M16 M20	75.5	16
1321	SAE DN 100 DIN DN 100	143	271	161	194	1084	250	238	940	561	250	M16 M20	82	31
1322	SAE DN 100 DIN DN 100	143	264	157	200	1084	250	238	940	561	250	M16 M20	96	31

NOTE

The information in this brochure relates to the operating conditions and applications described.
For applications or operating conditions not described, please contact the relevant technical department.
Subject to technical modifications.

HYDAC Filtrertechnik GmbH
Industriegebiet
D-66280 Sulzbach/Saar
Tel.: 0 68 97 / 509-01
Fax: 0 68 97 / 509-300
Internet: www.hydac.com
E-Mail: filter@hydac.com