



Pressure Filter HFM up to 140 l/min, up to 400 bar



1. TECHNICAL SPECIFICATIONS

1.1 FILTER HOUSING

Construction

The filter housings are designed in accordance with international regulations. They consist of a filter head and a screw-in filter bowl.

Standard equipment:

- bypass valve
- connection for a clogging indicator on the top of the head (4 mounting holes)

1.2 FILTER ELEMENTS

HYDAC filter elements are validated and their quality is constantly monitored according to the following standards:

- ISO 2941
- ISO 2942
- ISO 2943
- ISO 3724
- ISO 3968
- ISO 11170
- ISO 16889

Contamination retention capacities in g

HFM	Betamicon® BN4HC			
	3 µm	5 µm	10 µm	20 µm
75	21.6	24.3	25.7	26.5
95	27.5	30.9	32.7	33.7

Filter elements are available with the following pressure stability values:
Betamicon® (BN4HC): 20 bar

1.3 FILTER SPECIFICATIONS

Nominal pressure	400 bar
Fatigue strength	at nominal pressure 10 ⁶ cycles from 0 to nominal pressure
Temperature range	-10 °C to +100 °C (-30 °C to -10 °C: p _{max} = 200 bar)
Material of filter head	EN-GJS 400-15
Material of filter bowl	Cold extruded steel
Type of clogging indicator	VD (differential pressure measurement up to 420 bar operating pressure)
Pressure setting of the clogging indicator	5 bar (others on request)
Bypass cracking pressure	7 bar (others on request)

1.4 SEALS

NBR (=Perbunan)

1.5 INSTALLATION INLINE FILTER

1.6 SPECIAL MODELS AND ACCESSORIES

On request

1.7 SPARE PARTS

See Original Spare Parts List

1.8 CERTIFICATES AND APPROVALS

On request


1.9 COMPATIBILITY WITH HYDRAULIC FLUIDS ISO 2943

- Hydraulic oils H to HLPD DIN 51524
- Lubrication oils DIN 51517, API, ACEA, DIN 51515, ISO 6743
- Compressor oils DIN 51506
- Biodegradable operating fluids VDMA 24568 HETG, HEES, HEPG
- Operating fluids with high water content (> 50 % water content) on request

1.10 MAINTENANCE INSTRUCTIONS

- Filter housings must be earthed.
- When using electrical clogging indicators, the electrical power supply to the system must be switched off before removing the clogging indicator connector.

Symbol for hydraulic systems

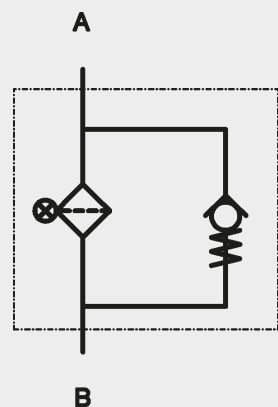

2. MODEL CODE (also order example)

HFM BN/HC 75 S J 10 D 1 . X /-L24

2.1 COMPLETE FILTER

Filter type _____

HFM

Filter material of element _____

BN/HC Betamicon® (BN4HC)

Size of filter or element _____

HFM: 75, 95

Operating pressure _____

S = 400 bar

Type and size of connection _____

Type	Port	Filter size	
		75	95
H	G ¾	●	●
J	G 1	●	●

Filtration rating in µm _____

BN/HC: 3, 5, 10, 20

Type of clogging indicator _____

W without port (no clogging indicator)

A plastic blanking plug in indicator port

B visual

C electrical

D visual and electrical

for other clogging indicators,
see brochure no. 7.050../..

Type code _____

1

Modification number _____

X the latest version is always supplied

Supplementary details _____

B7 standard: bypass cracking pressure 7 bar

L... light with appropriate voltage (24, 48, 110, 220 Volt)

LED 2 light-emitting diodes up to 24 Volt

V FPM seals

W suitable for HFA and HFC emulsions

] only for clogging
indicators type "D"

2.2 REPLACEMENT ELEMENT

0075 D 010 BN4HC /-V

Size _____

0075, 0095

Type _____

D

Filtration rating in µm _____

BN4HC: 003, 005, 010, 020

Filter material _____

BN4HC

Supplementary details _____

V (for descriptions, see Point 2.1)

2.3 REPLACEMENT CLOGGING INDICATOR

VD 5 D . X /-L24

Type of indicator _____

VD differential pressure indicator up to 420 bar operating pressure

Pressure setting _____

5 standard 5 bar, others on request

Type of clogging indicator _____

D (see Point 2.1)

Modification number _____

X the latest version is always supplied

Supplementary details _____

L..., LED, V, W (for descriptions, see Point 2.1)

3. FILTER CALCULATION / SIZING

The total pressure drop of a filter at a certain flow rate Q is the sum of the housing Δp and the element Δp and is calculated as follows:

$$\Delta p_{\text{total}} = \Delta p_{\text{housing}} + \Delta p_{\text{element}}$$

$$\Delta p_{\text{housing}} = (\text{see Point 3.1})$$

$$\Delta p_{\text{element}} = Q \cdot \frac{SK^*}{1000} \cdot \frac{\text{viscosity}}{30}$$

(*see Point 3.2)


For ease of calculation, our Filter Sizing Program is available on request free of charge.

NEW: Sizing online at www.hydac.com

3.1 Δp -Q HOUSING CURVES BASED ON ISO 3968

The housing curves apply to mineral oil with a density of 0.86 kg/dm³ and a kinematic viscosity of 30 mm²/s. In this case, the differential pressure changes proportionally to the density.

HFM

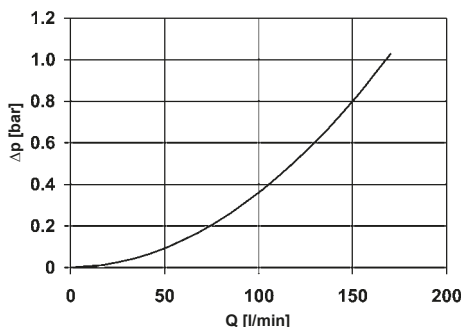


3.2 GRADIENT COEFFICIENTS (SK) FOR FILTER ELEMENTS


The gradient coefficients in mbar/(l/min) apply to mineral oils with a kinematic viscosity of 30 mm²/s. The pressure drop changes proportionally to the change in viscosity.

HFM	BN4HC			
	3 μm	5 μm	10 μm	20 μm
75	9.3	7.5	5.3	3.1
95	7.5	6.0	4.1	2.4


BN4HC: HFM 75

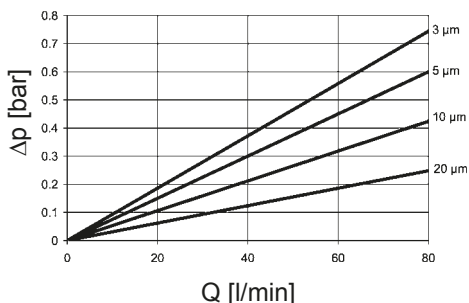

BN4HC: HFM 95

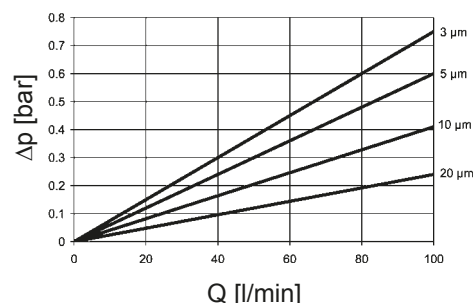

4. DIMENSIONS

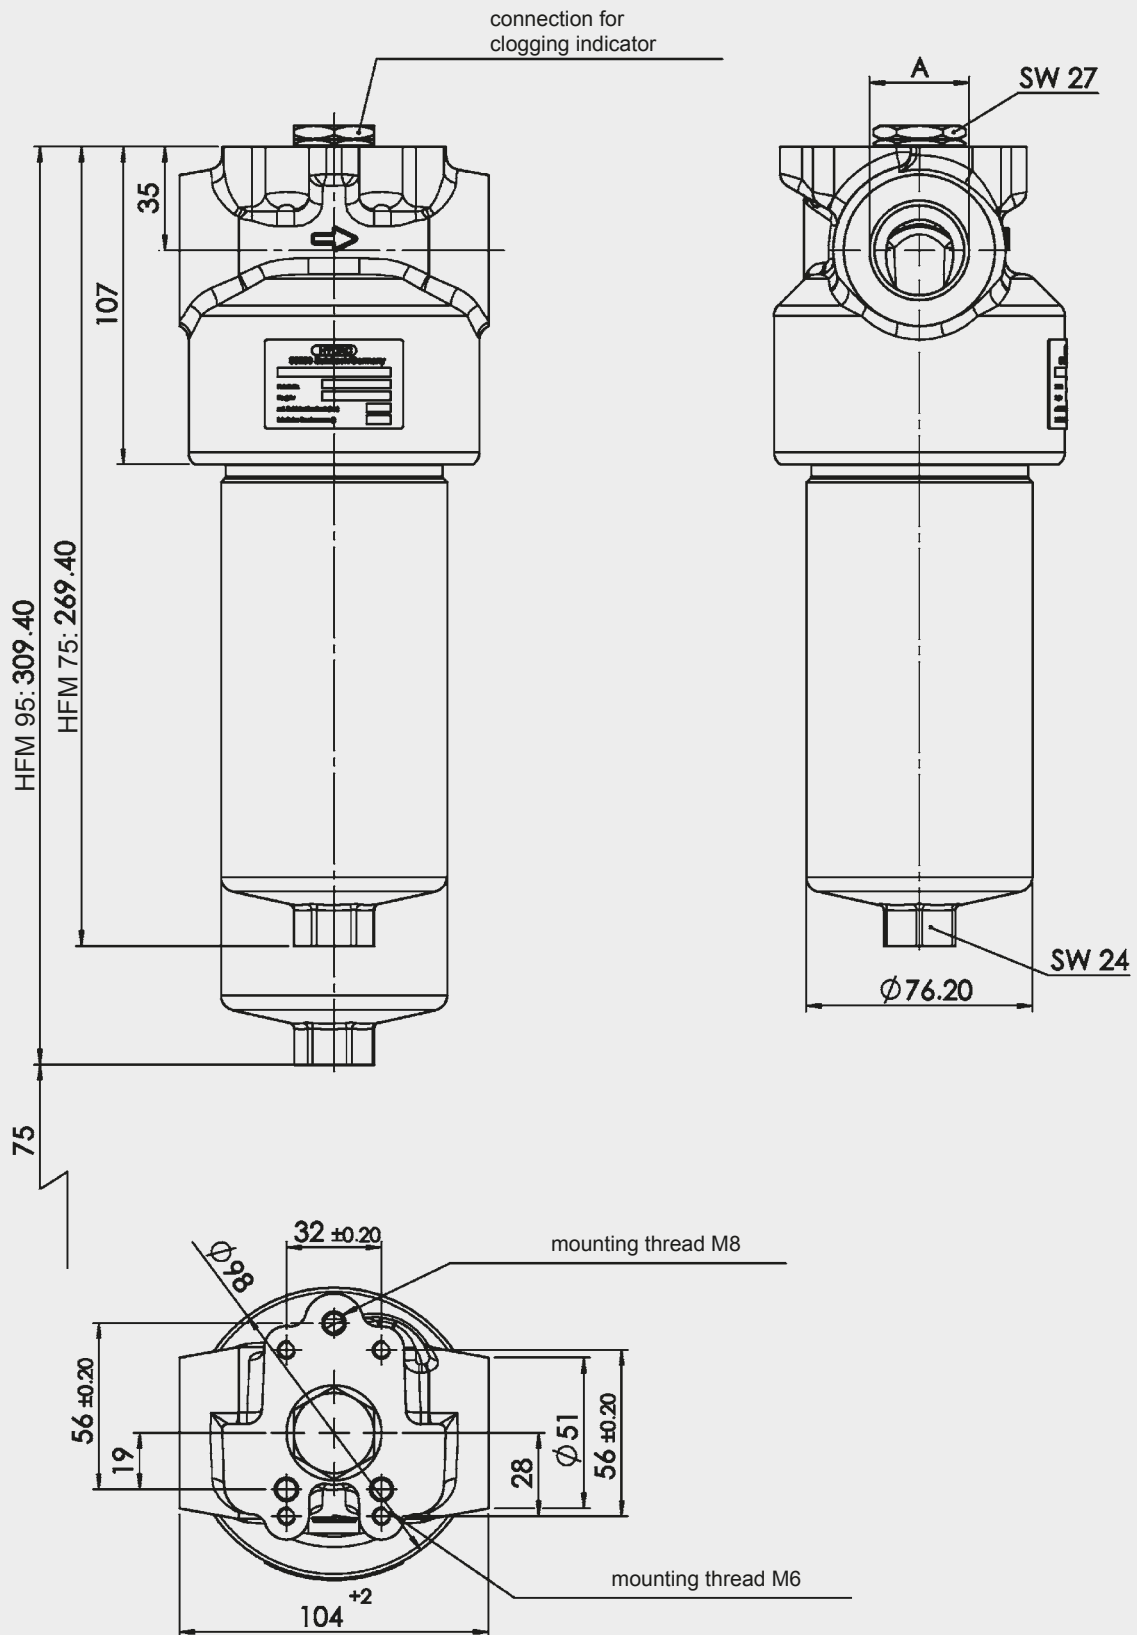

HFM	Weight incl. element [kg]	Vol. of pressure chamber [l]
75	5.6	0.56
95	6.1	0.69

NOTE

The information in this brochure relates to the operating conditions and applications described.
For applications or operating conditions not described, please contact the relevant technical department.
Subject to technical modifications.

HYDAC Filtrertechnik GmbH
Industriegebiet
D-66280 Sulzbach/Saar
Tel.: 0 68 97 / 509-01
Fax: 0 68 97 / 509-300
Internet: www.hydac.com
E-Mail: filter@hydac.com