




Inline Filter or Pressure Filter for Manifold Mounting HF2P up to 100 l/min, up to 280 bar



1. TECHNICAL SPECIFICATIONS

1.1 FILTER HOUSING

Construction

The filter housings are designed in accordance with international regulations. They consist of a filter head and a screw-in filter bowl.

Standard equipment:

- bypass valve
- connection for a clogging indicator

1.2 FILTER ELEMENTS

HYDAC filter elements are validated and their quality is constantly monitored according to the following standards:

- ISO 2941
- ISO 2942
- ISO 2943
- ISO 3724
- ISO 3968
- ISO 11170
- ISO 16889

Filter elements are available with the following pressure stability values:

Betamicon® (BN): 20 bar
Betamicon® (BH): 210 bar

1.3 FILTER SPECIFICATIONS

| | |
|--|---|
| Nominal pressure | 280 bar |
| Fatigue strength | At nominal pressure 10 ⁶ cycles from 0 to nominal pressure |
| Temperature range | -30 °C to +100 °C |
| Material of filter head | EN-GJS |
| Material of filter bowl | Steel |
| Type of clogging indicator | VD (differential pressure measurement up to 420 bar operating pressure) |
| Pressure setting of the clogging indicator | 5 bar (others on request) |
| Bypass cracking pressure | 6 bar (others on request) |

1.4 SEALS

NBR (=Perbunan)

1.5 INSTALLATION

Inline and manifold-mounted filter

1.6 SPECIAL MODELS AND ACCESSORIES

- Without bypass valve
- Without port for clogging indicator

1.7 SPARE PARTS

See Original Spare Parts List


1.8 CERTIFICATES AND APPROVALS

On request

1.9 COMPATIBILITY WITH HYDRAULIC FLUIDS ISO 2943

- Hydraulic oils H to HLPD DIN 51524
- Lubrication oils DIN 51517, API, ACEA, DIN 51515, ISO 6743
- Compressor oils DIN 51506
- Biodegradable operating fluids VDMA 24568 HETG, HEES, HEPG
- Fire-resistant fluids HFA, HFB, HFC and HFD
- Operating fluids with high water content (> 50 % water content) on request

Symbol for hydraulic systems

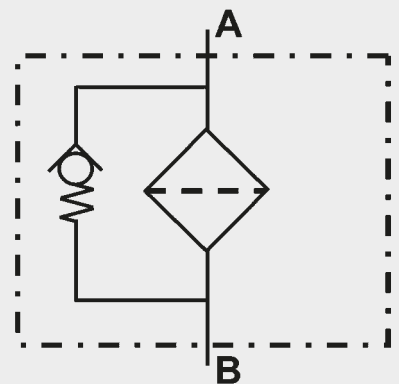

2. MODEL CODE (also order example)

HF2P BN 04 G 3 C 1 . X /12 V-B6

2.1 COMPLETE FILTER

Filter type _____

HF2P

Filter material of element _____

BN Betamicron® (BN)

BH Betamicron® (BH)

Size of filter or element _____

04 4"

08 8"

Connection _____

G threaded port

P manifold mounting

Filtration rating in µm _____

BN : 3, 6, 12, 25

BH : 3, 6, 10, 17

Type of clogging indicator _____

W without port (no clogging indicator)

A steel blanking plug in indicator port

B visual

C electrical

D visual and electrical

J electrical switch (Brad Harrison 5 Pin Mini)

J4 electrical switch (Brad Harrison 4 Pin Micro)

for other clogging indicators,
see brochure no. 7.050../..

Type code _____

1

Modification number _____

X the latest version is always supplied

Supplementary details

no details = manifold mounting

0 G ¾" BSPP

12 SAE-12-O-ring boss

B. bypass cracking pressure (e.g. B3 = 3 bar); without details = without bypass valve

L... light with appropriate voltage (24, 48, 110, 220 Volt)

LED 2 light emitting diodes up to 24 Volt

V FPM seals

W suitable for HFA and HFC emulsions

2.2 REPLACEMENT ELEMENT

1.07.04 D 03 BN /-V

Size _____

04 4"

08 8"

Type _____

D

Filtration rating in µm _____

BN: 03, 06, 12, 25

BH: 03, 06, 10, 17

Filter material _____

BN, BH

Supplementary details _____

V (for descriptions, see Point 2.1)

2.3 REPLACEMENT CLOGGING INDICATOR

VD 5 D . X /-L24

Type of indicator _____

VD differential pressure indicator up to 420 bar operating pressure

Pressure setting _____

5 standard 5 bar, others on request

Type of clogging indicator _____

D (see Point 2.1)

Modification number _____

X the latest version is always supplied

Supplementary details _____

L..., LED, V, W (for descriptions, see point 2.1)

3. FILTER CALCULATION / SIZING

The total pressure drop of a filter at a certain flow rate Q is the sum of the housing Δp and the element Δp and is calculated as follows:

$$\Delta p_{\text{total}} = \Delta p_{\text{housing}} + \Delta p_{\text{element}}$$

$$\Delta p_{\text{housing}} = (\text{see Point 3.1})$$

$$\Delta p_{\text{element}} = Q \cdot \frac{SK^*}{1000} \cdot \frac{\text{viscosity}}{30}$$

(*see Point 3.2)


For ease of calculation, our Filter Sizing Program is available on request free of charge.

NEW: Sizing online at www.hydac.com

3.1 Δp -Q HOUSING CURVES BASED ON ISO 3968

The housing curves apply to mineral oil with a density of 0.86 kg/dm³ and a kinematic viscosity of 30 mm²/s. In this case, the differential pressure changes proportionally to the density.

HF2P

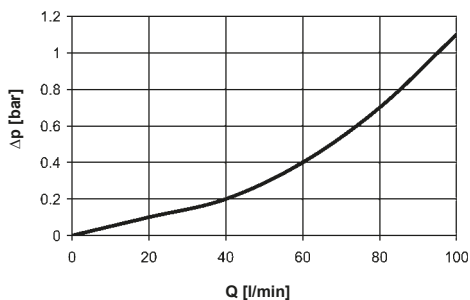


3.2 GRADIENT COEFFICIENTS (SK) FOR FILTER ELEMENTS


The gradient coefficients in mbar/(l/min) apply to mineral oils with a kinematic viscosity of 30 mm²/s. The pressure drop changes proportionally to the change in viscosity.

| HF2P | BN | | | | BH | | | |
|------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 3 μm | 6 μm | 12 μm | 25 μm | 3 μm | 6 μm | 10 μm | 17 μm |
| 04 | 22.40 | 17.14 | 16.03 | 8.81 | 30.11 | 26.81 | 20.93 | 12.12 |
| 08 | 11.14 | 8.45 | 7.96 | 4.41 | 14.57 | 13.10 | 10.16 | 5.88 |


04 BN:

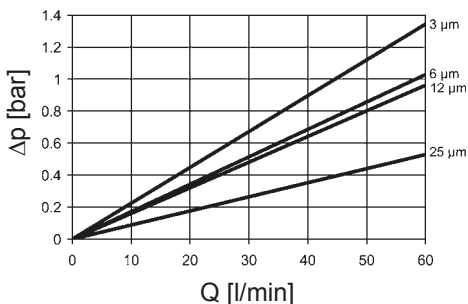


04 BH:

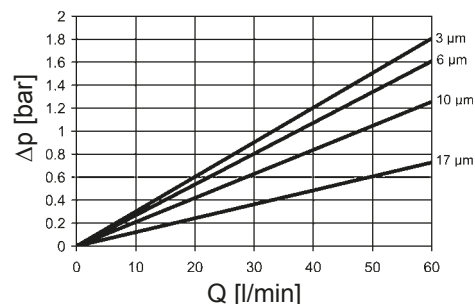

08 BN:

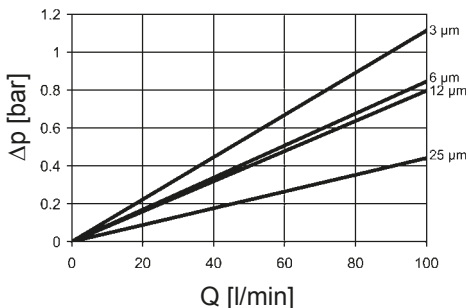


08 BH:

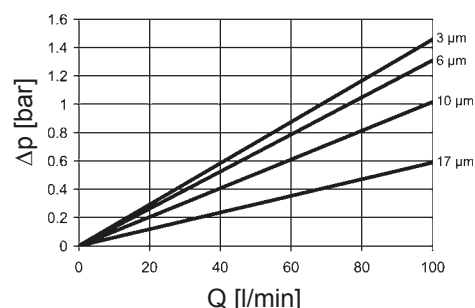


4. DIMENSIONS

HF2P

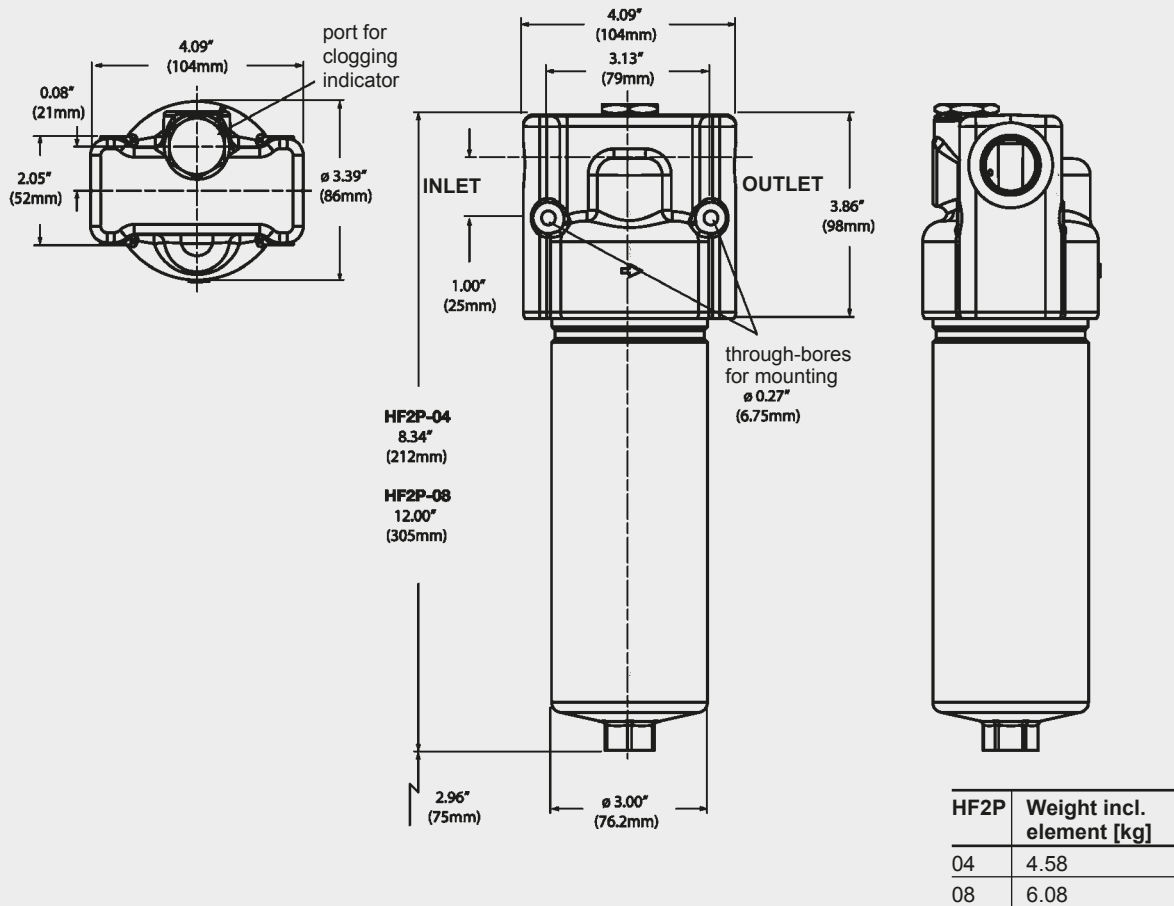

MANIFOLD MOUNTING

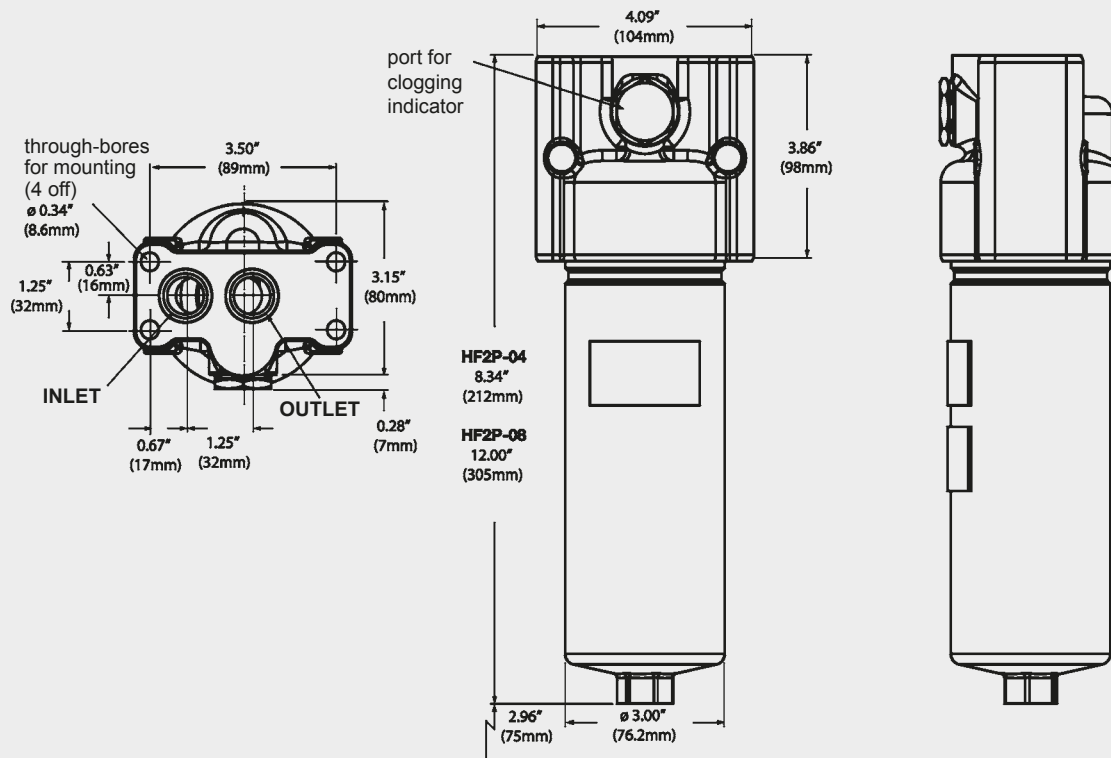

NOTE

The information in this brochure relates to the operating conditions and applications described.
For applications or operating conditions not described, please contact the relevant technical department.
Subject to technical modifications.

HYDAC Filtrertechnik GmbH
Industriegebiet
D-66280 Sulzbach/Saar
Tel.: 0 68 97 / 509-01
Fax: 0 68 97 / 509-300
Internet: www.hydac.com
E-Mail: filter@hydac.com