



## Hand Pump Manual Operation SAE-10 Cartridge – 207 bar MP10

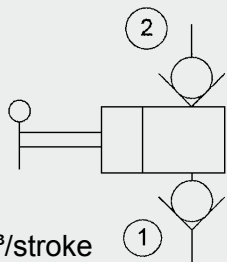

Up to 7.5 cm<sup>3</sup>/stroke  
Up to 207 bar

### FUNCTION

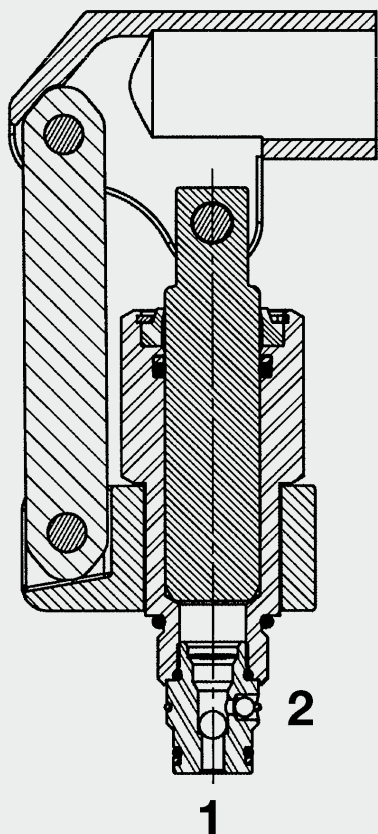

### FEATURES


- Robust design for high loads
- Built-in check valves on inlet and outlet
- Handle can be turned through 360°
- Type 02 has fixing lugs to secure the lever assembly

### SPECIFICATIONS

Operating pressure:	max. 207 bar
Nominal flow:	max. 7.5 cm <sup>3</sup> /stroke
Leakage:	Leakage-free (max. 0.35 cm <sup>3</sup> /min at nominal pressure)
Media operating temperature range:	min. -30 °C to max. +100 °C
Ambient temperature range:	min. -30 °C to max. +60 °C
Operating fluid:	Hydraulic oil to DIN 51524 Part 1 and 2
Viscosity range:	min. 7.4 mm <sup>2</sup> /s to max. 420 mm <sup>2</sup> /s
Filtration:	Class 21/19/16 according to ISO 4406 or cleaner
Installation:	No orientation restrictions
Materials:	Valve body: high tensile steel Piston: steel Seals: NBR (standard) FKM (optional, media temperature range -20 °C to +210 °C)
	Back-up rings: PTFE
Cavity:	FC10-2
Weight:	0.65 kg

The hand pump MP10 is a hand pump with built-in check valves on the inlet and outlet. When the lever is raised, fluid is drawn from port 1 into the space created; when the lever is pressed down, the check valve closes and the fluid is discharged at port 2.

## DIMENSIONS

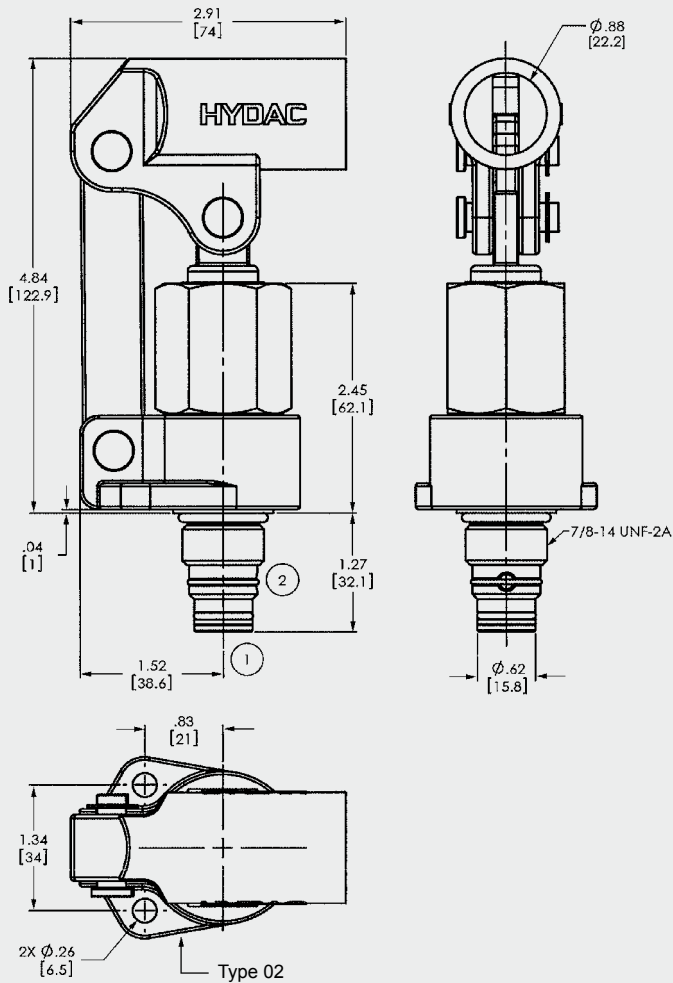

## MODEL CODE

**MP10 - 01**

**Basic model** \_\_\_\_\_

Hand pump

**Cavity** \_\_\_\_\_

FC10-2 = UNF cavity 2-way

**Type** \_\_\_\_\_

01 = without fixing lugs

02 = with fixing lugs

### Standard models

Model code	Part No.
MP10-01 HAND PUMP	2610181
MP10-02 HAND PUMP	2610196

Other models on request

### Standard in-line bodies

Code	Part No.	Material	Ports	Pressure
FH102-SB4	3037594	Steel, zinc-plated	1/2 BSP	420 bar
FH102-AB4	3037777	Aluminium, clear anodized	1/2 BSP	210 bar


Other line bodies on request

### Seal kits

Code	Material	Part No.
FS102-N SEAL KIT	NBR	3033872
FS102-V SEAL KIT	FKM	3051757


## CAVITY

FC10-2

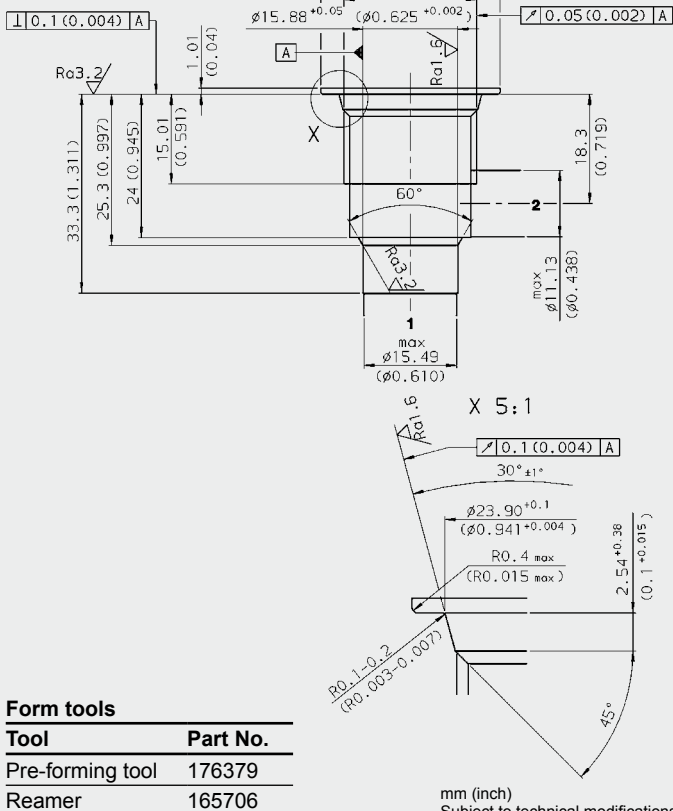

## PERFORMANCE

$T_{oil} = 46^\circ C$   
 $v = 33 \text{ mm}^2/\text{s}$

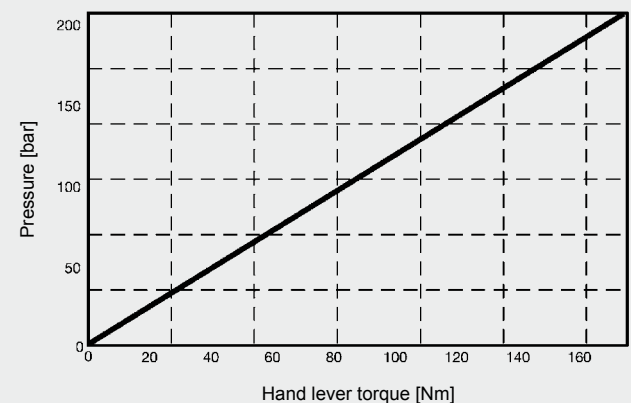

### NOTE

The information in this brochure relates to the operating conditions and applications described. For applications or operating conditions not described, please contact the relevant technical department.  
 Subject to technical modifications.

**HYDAC Fluidtechnik GmbH**

Justus-von-Liebig-Str.  
**D-66280 Sulzbach/Saar**  
 Tel: 0 68 97 /509-01  
 Fax: 0 68 97 /509-598  
 E-Mail: flutec@hydac.com