


## FUNCTION

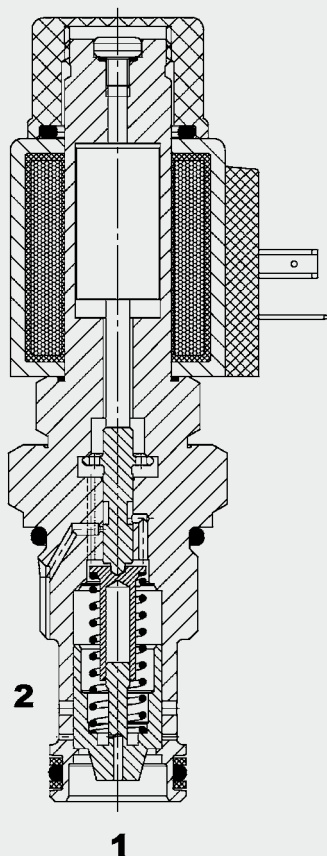

The PWK12120WP is a normally closed, spool type, pilot-operated proportional flow control valve. Together with a pressure compensator, which maintains a constant differential between the inlet pressure (port 1) and the outlet pressure (port 2), it can be used as a proportional flow regulator.

The energization of the coil reduces or increases an orifice cross-section via the pilot stage and thus controls the effective oil flow.

The spring fitted between the main and pilot spools acts against the solenoid force - this force feedback ensures that the flow control spool always maintains a stable position.

## Proportional Flow Control Valve Spool Type, Pilot-Operated Normally Closed Metric Cartridge – 280 bar

### PWK12120WP

## FEATURES

- Reliable and cost-effective proportional control of the flow by controlling the position of the flow control spool using force feedback
- Smooth opening and closing
- Excellent dynamic performance
- Low hysteresis
- Excellent repeatability
- Optional internal damping of the control spool to dampen vibrations in applications prone to vibrations such as lifting equipment
- External surfaces zinc-plated and corrosion-proof
- Coil seals protect the solenoid system
- Wide variety of connectors available
- Hardened and ground internal valve components to ensure minimal wear and extended service life
- Different flow rate ranges available

## SPECIFICATIONS


Operating pressure:	max. 280 bar
Nominal flow:	max. 200 l/min
Permitted pressure differential between ports 1 and 2:	max. 50 bar
Media operating temperature range:	min. -20 °C to max. +100 °C
Ambient temperature range:	min. -20 °C to max. +60 °C
Operating fluid:	Hydraulic oil to DIN 51524 Part 1 and 2
Viscosity range:	min. 10 mm <sup>2</sup> /s to max. 420 mm <sup>2</sup> /s
Filtration:	Class 19/17/14 to ISO 4406 or cleaner
MTTF <sub>a</sub> :	150 years (see "Conditions and instructions for valves" in brochure 5.300)
Installation:	No orientation restrictions
Materials:	Valve body: steel Spool: hardened and ground steel Seals: FKM (standard) NBR (optional, media temperature range -20 °C to +120 °C) Back-up rings: PTFE
Cavity:	Metric 12120
Weight:	Valve complete: 0.33 kg Coil only: 0.19 kg

## Electronic data:

Control currents:	max. 2.1 A; 2.2 Ohm (12V coil) max. 1.05 A; 8.8 Ohm (24V coil)
Dither frequency:	approx. 160 Hz
Coil duty rating:	100 %
Hysteresis with dither:	≤ 5 % of max. control current (undampened) ≤ 8 % of max. control current (dampened)
Coil type:	Coil P...-40-1836

NOTE: In order to achieve optimal function, any trapped air should be vented using the air bleed screw on the face of the pole tube.

## DIMENSIONS

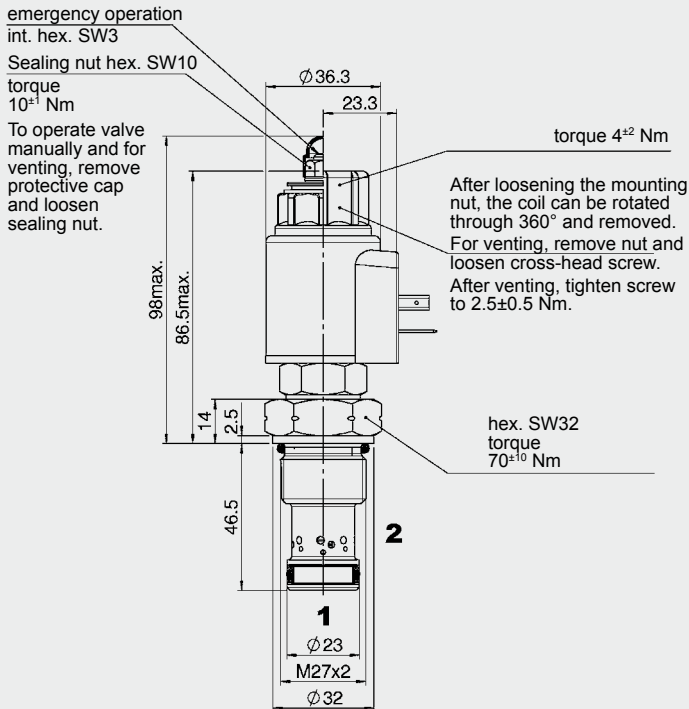

## MODEL CODE

**PWK12120 WP - 01 M - C - V - P40 - 24 PG - 8.8**

<b>Basic model</b>	
Proportional flow control valve	
<b>Function symbol</b>	
Normally closed, pilot-operated	
<b>Type</b>	
01 = with damping	
02 = without damping	
<b>Manual override</b>	
No details = without manual override	
M = manual override	
<b>Body and ports*</b>	
C = cartridge only	
<b>Seals</b>	
V = FKM (standard)	
N = NBR (optional)	
<b>Flow rate range and control characteristics</b>	
Types P40, P80, P100, L30, L45, L65, L100	
see Q-I graphs	
<b>Coil voltage</b>	
12 = 12 Volt DC (2.2 Ohm)	
24 = 24 Volt DC (8.8 Ohm)	
Other voltages on request	
<b>Coil connectors (type 40-1836)</b>	
PG = DIN connector to EN175301-803	
PL = 2 flying leads, 457 mm long; 0.75 mm <sup>2</sup>	
PN = Deutsch connector, 2-pole, axial	
PT = AMP Junior Timer, 2-pole, radial	
<b>Coil resistance</b>	
2.2 = 2.2 Ω (12 V)	
8.8 = 8.8 Ω (24 V)	

## Standard models

Model code	Part No.
PWK12120WP-01-C-V-P40-24PG-8.8	3398440
PWK12120WP-01-C-V-P80-24PG-8.8	3398441
PWK12120WP-01-C-V-P100-24PG-8.8	3398442
PWK12120WP-02-C-V-L30-24PG-8.8	3653578
PWK12120WP-02-C-V-L45-24PG-8.8	3398444
PWK12120WP-02-C-V-L65-24PG-8.8	3615569
PWK12120WP-02-C-V-L100-24PG-8.8	3398485

Other models on request

## Seal kits

Code	Part No.
SEAL KIT 12120-NBR	3454001
SEAL KIT 12120-FKM	3454002


## \*Standard in-line bodies

Code	Part No.	Material	Ports	Pressure
R12120-10X-01	396708	Steel, zinc-plated	G3/4	350 bar
R12120-10X-02	396707	Steel, zinc-plated	M 27 x 2	350 bar

Other line bodies on request

## CAVITY

Metric 12120


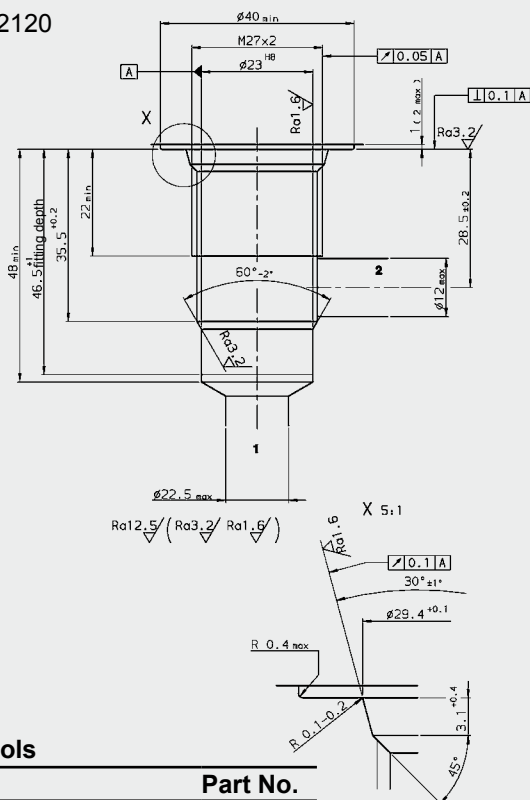


## Form tools

Tool	Part No.
Countersink (shank MK3)	172880
Reamer (shank MK2)	1014207

## PERFORMANCE

Measured at  
v = 34 mm<sup>2</sup>/s  
T<sub>oil</sub> = 46 °C  
and 10 bar  
pressure differential  
Coil  
24P-8.8,  
Control current  
PWM 160 Hz

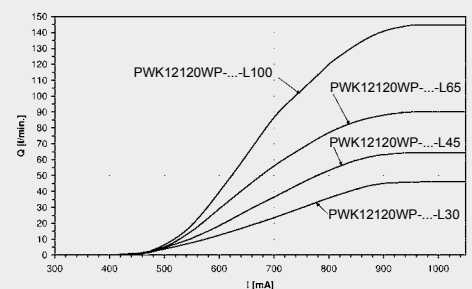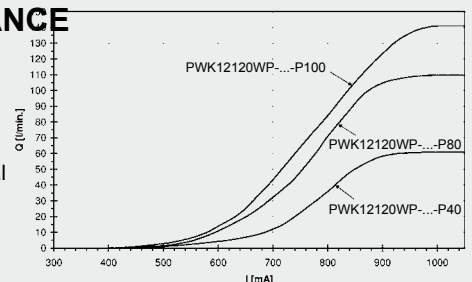

## NOTE

The information in this brochure relates to the operating conditions and applications described.  
For applications or operating conditions not described, please contact the relevant technical department.  
Subject to technical modifications.

**HYDAC Fluidtechnik GmbH**  
Justus-von-Liebig-Str.  
D-66280 Sulzbach/Saar  
Tel: 0 68 97 /509-01  
Fax: 0 68 97 /509-598  
E-Mail: flutec@hydac.com