



Hydraulic Accumulators with Back-Up Nitrogen Bottles

1. GENERAL

To complete the accumulator range, HYDAC provides a variety of useful accessory products. They guarantee correct installation and optimum functioning of HYDAC hydraulic accumulators. These include, amongst others, nitrogen bottles which can be used to back up bladder and piston accumulators. Nitrogen bottles used as back-ups increase the gas volume in the accumulator. This means that smaller accumulators can be used for the same gas volume and costs can be reduced.

For further information, please turn to the sections:


- Bladder Accumulators
Standard
No. 3.201
- Piston Accumulators
Standard
No. 3.301

2. BACK-UP VERSIONS


2.1. SET-UP USING THE EXAMPLE OF A BLADDER ACCUMULATOR

Based on bladder accumulator models 20 ... 50 l, the gas-side of these transfer accumulators is designed especially for connecting to nitrogen bottles. A diffuser rod prevents damage to the bladder when the accumulator is charged. This design can also be used for the separation of fluids (taking into account the volume ratios which apply to bladder accumulators).

Type 1

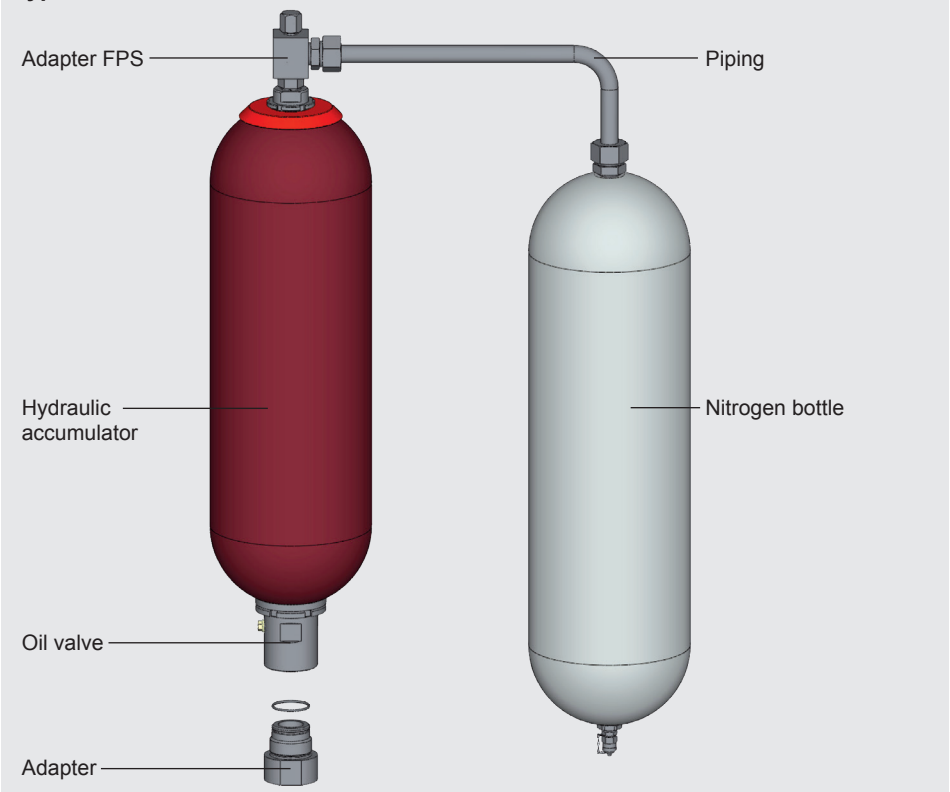


Type 2

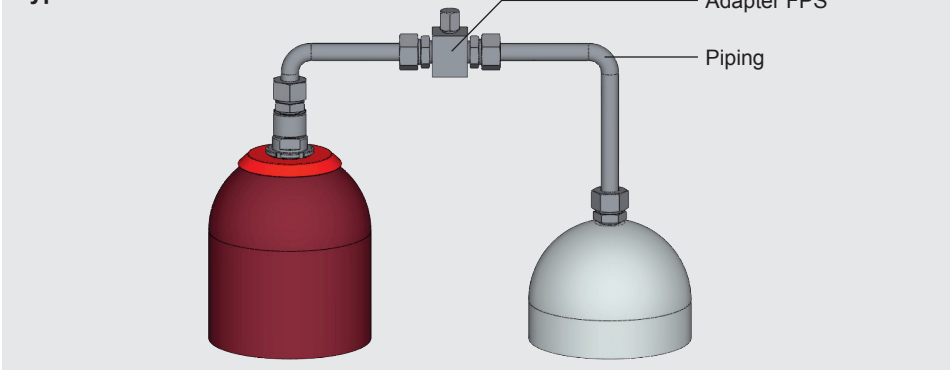


2.2. DIMENSIONS

Type 1

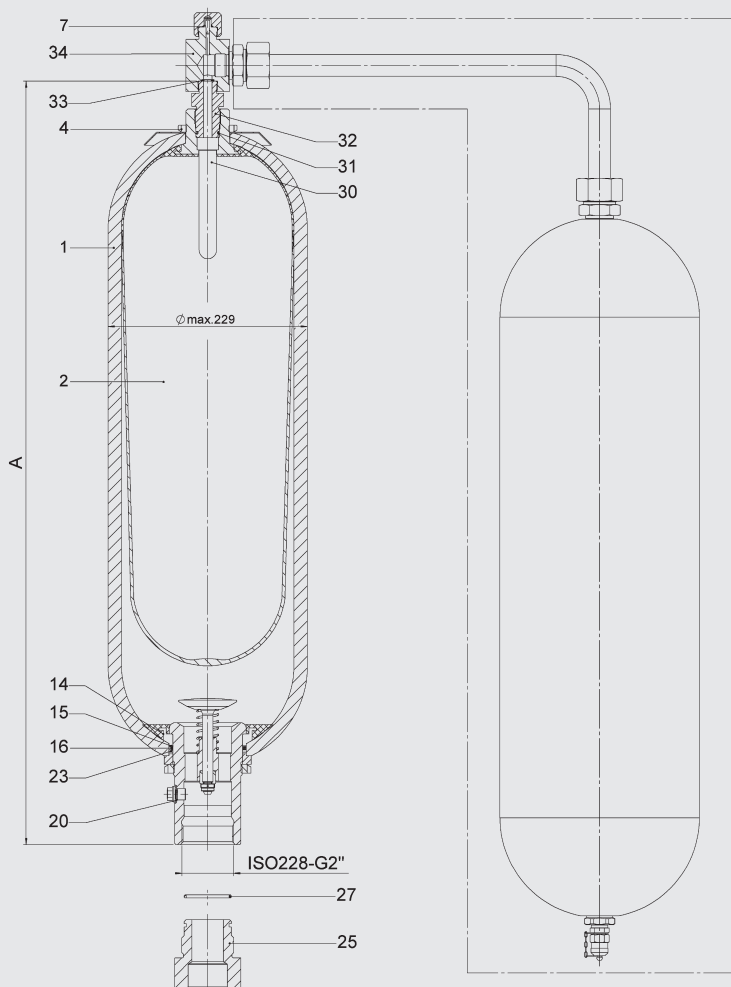

Type 2

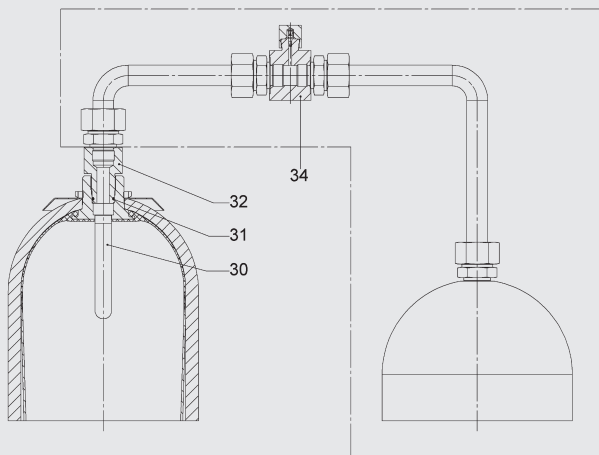

Nominal volume [l]	Effective gas volume [l]	Weight [kg]	A max. [mm]
20	17.5	53.5	905
24	24	72	1070
32	32.5	89	1420
50	47.5	119.5	1930

others on request

2.3. SPARE PARTS

NBR, carbon steel, standard gas valve

Nominal volume of accum. [l]	Seal kit Part no.	Repair kit	
		Type 1 Part no.	Type 2 Part no.
20	353621	3119500	3897464
24		3119502	3897463
32		3119498	3897462
50		3119499	3897461

Description	Item
-------------	------

Bladder assembly consisting of:

Bladder	2
Lock nut	4
Diffuser rod	30
O-ring 22x2.5 ¹⁾	31
Adapter for Type 1/2	32

Seal kit consisting of:

O-ring 7.5x2 ¹⁾	7
Washer	15
O-ring 80x5 ¹⁾	16
Seal ring	20
Back-up ring	23
O-ring 48x3 ¹⁾	27

Repair kit consisting of:

Bladder assembly (see above)	
Seal kit (see above)	
O-ring 11x2 ¹⁾	33
Anti-extrusion ring	14
Adapter FPS for Type 1/2 ²⁾	34

Recommended spare parts

¹⁾ For code 663 and 665 different dimensions

²⁾ see section 4.

Item 1 not available as a spare part.


Item 25 must be ordered separately. See Bladder Accumulator Standard, No. 3.201 (section 4.2.)

Item 32 Type 1 is standard.

For other spare parts, see section 3.

3. NITROGEN BOTTLES

3.1. DESCRIPTION AND CONSTRUCTION

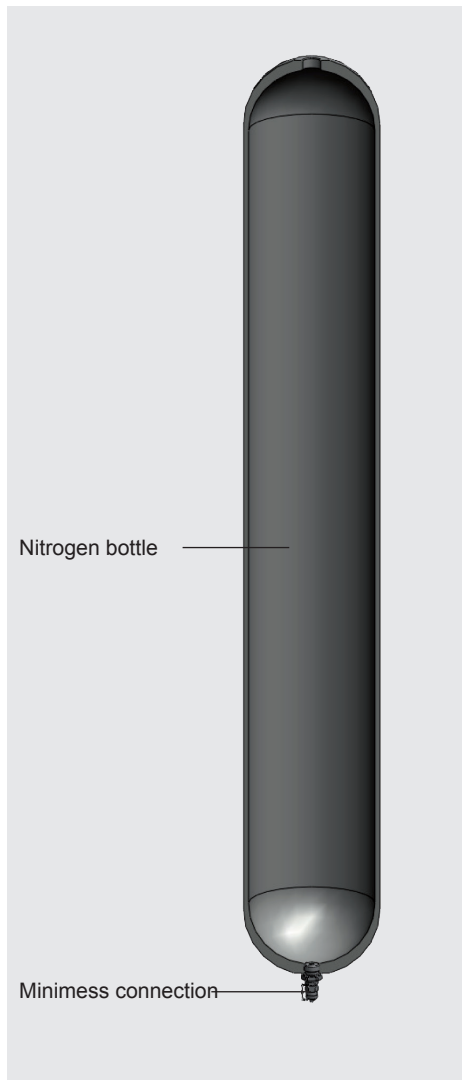

HYDAC nitrogen bottles are used for the receiving and storage of nitrogen. HYDAC supplies various versions, such as standard nitrogen bottles made from forged vessels and special vessels based on bladder accumulator shells, piston accumulator tubes and diaphragm accumulator parts – see catalogue section:

- Bladder Accumulators
Standard
No. 3.201
- Piston Accumulators
Standard
No. 3.301
- Diaphragm Accumulators
No. 3.100

The following technical specifications refer to standard nitrogen bottles. Please ask us for information regarding other versions.

3.2. ADVANTAGES

The use of HYDAC nitrogen bottles provides the following benefits:

- Cost-effective increase of the accumulator volume and as a result
- Smaller accumulators for the same gas volume.

3.3. TECHNICAL SPECIFICATIONS

3.3.1 Model code

Not all combinations are possible.

Order example. For further information, please contact HYDAC.

	SN360	-	50	AA	/	010	U	-	360	D	D	-C
Series												
Code												
no details = standard special types (see section 3.1.): B = bladder accumulator shell K = piston accumulator tube M = diaphragm accumulator halves												
Nominal volume [l]												
Connection type												
Version, drain side (condensate)												
A = ISO 228 (BSP) B = DIN 13 to ISO 965/1 (metric) C = ANSI B1.1 (UNF seal SAE) D = ANSI B2.1 F = flange 1 = sealed with blanking plug 2 = with condensate drain, hex. socket cap screw 3 = with condensate drain valve 4 = with Minimess valve												
Connection type on connection side												
A = ISO 228 (BSP) B = DIN 13 to ISO 965/1 (metric) C = ANSI B1.1 (UNF seal SAE) D = ANSI B2.1 F = flange												
Material code												
Material (connection)												
0 = no installed parts 1 = carbon steel 3 = stainless steel 4 = carbon steel with protective coating 6 = low temperature steel												
Housing material												
1 = carbon steel 2 = carbon steel with protective coating 4 = stainless steel 6 = low temperature steel												
Seal material (elastomer)												
0 = no elastomer used 2 = NBR 4 = IIR 5 = low temperature NBR 6 = FKM												
Certification code												
U = European Pressure Equipment Directive (PED)												
Permitted operating pressure [bar]												
Size for connection side (see Table 3.3.2)												
Size for drain side (see Table 3.3.2)												
0 = for type 1-4												
Version												
no details = standard C = compact												


3.3.2 Connections

Standard connections are highlighted in grey.

All other designs available on request (not all combinations are possible).

Type	A	B	C	D	F
	BSP ISO228	metric DIN13 ISO965/1	SAE ANSI B1.1	NPT ANSI B2.1	Flange connection
Size					
A	G 1/4"	M12x1.5	7/16"-20UNF	1/4"	1/2" 3000 psi Code 61
B	G 3/8"	M18x1.5	9/16"-18UNF	3/8"	3/4"
C	G 1/2"	M22x1.5	3/4"-16UNF	1/2"	1"
D	G 3/4"	M27x2	1 1/16"-12UN	3/4"	1 1/4"
E	G 1"	M33x2	1 5/16"-12UN	1"	1 1/2"
F	G 1 1/4"	M42x2	1 5/8"-12UN	1 1/4"	2"
G	G 1 1/2"	M48x2	1 7/8"-12UN	1 1/2"	1/2" 6000 psi Code 62
H	G 2"	M14x1.5	2 1/2"-12UN	2"	3/4"
I	G 1 3/4"	M8	-	-	-
K	-	M16x1.5	-	-	1 1/4"
L	-	-	7/8"-14UNF	5/8"	1 1/2"
M	-	-	-	-	2"
S	Special version				

3.3.3 Dimensions of standard bottle

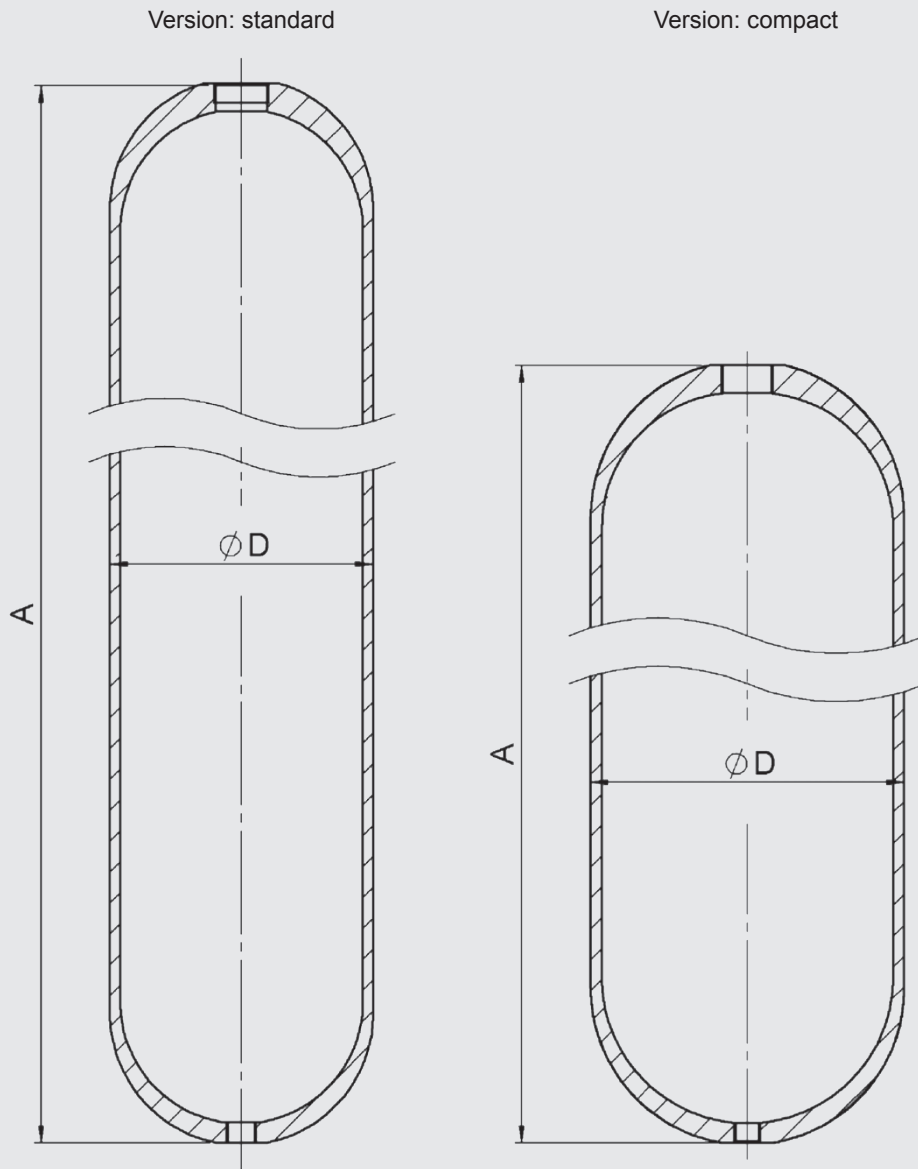

Series	Volume [l]	Version	Certification code	Connections to ISO 228 (Type AA)		A ± 25 [mm]	D ± 1% [mm]	Weight approx. [kg]	Part no.	Designation
				Drain side	Conne- tion side					
SN360	50	Standard	U	G 3/4	G 3/4	1650	229	87	3176324	SN360-50AA/010U-360DD
				G 3/4	G 1 1/2				3418347	SN360-50AA/010U-360DG
			S	G 3/4	G 1 1/2				3987605	SN360-50AA/010S-210DG
	75	Standard	U	G 3/4	G 1 1/2	2305	229	123	3561595	SN360-75AA/010U-360DG
				S	G 3/4				G 1 1/2	3987606
		Compact	U	G 3/4	G 1 1/2	1690	273	120	3987162	SN360-75AA/010U-360DG-C
S	G 3/4			G 1 1/2	3987163				SN360-75AA/010S-200DG-C	
SN600	50	Standard	S	G 3/4	G 1 1/2	1730	232	135	3987613	SN600-50AA/010S-345DG
	75	Standard	S	G 3/4	G 1 1/2	2500	232	195	3987614	SN600-75AA/010S-345DG

4. ACCESSORIES


4.1. CHARGING AND TESTING BLOCK F + P

4.1.1 Description

The HYDAC charging and testing block F+P is used to charge and test back-up type hydraulic accumulators. It has connections for the charging and testing unit FPU-1 and for pressure gauges. As a safety function, a gas safety valve GSV6 (see catalogue section given below) can be fitted. In addition, it allows the back-up nitrogen bottles to be shut off from the hydraulic accumulator.

- Safety Equipment for Hydraulic Accumulators
No. 3.552

4.1.2 Hydraulic circuit with charging and testing block

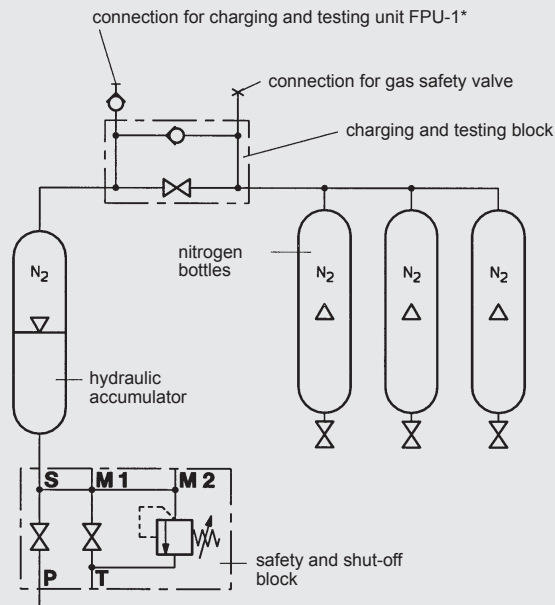


* For further information, see catalogue section:

- Charging and Testing Unit FPU
No. 3.501



4.1.3 Preferred models / Spare parts

Designation	Max. operating pressure [bar]	Weight [kg]	Part no.	Seal kit ¹⁾
F+P-16-20SR-6112-02X	400	4.3	850233	2115776
F+P-32-38SR-6112-02X	350	14	552193	2112088



¹⁾ recommended spare parts

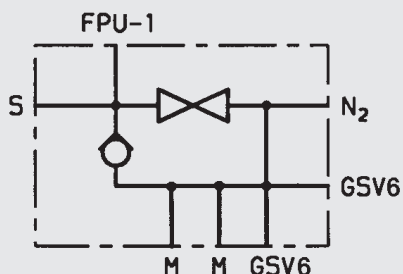

4.1.4 Technical specifications / dimensions
Charging and testing block DN 16

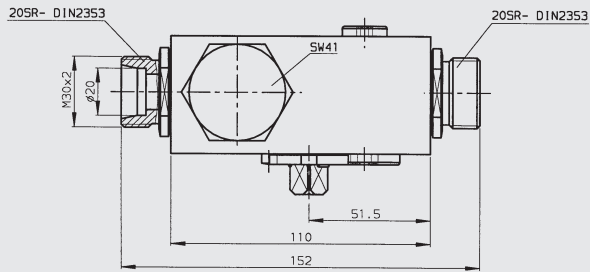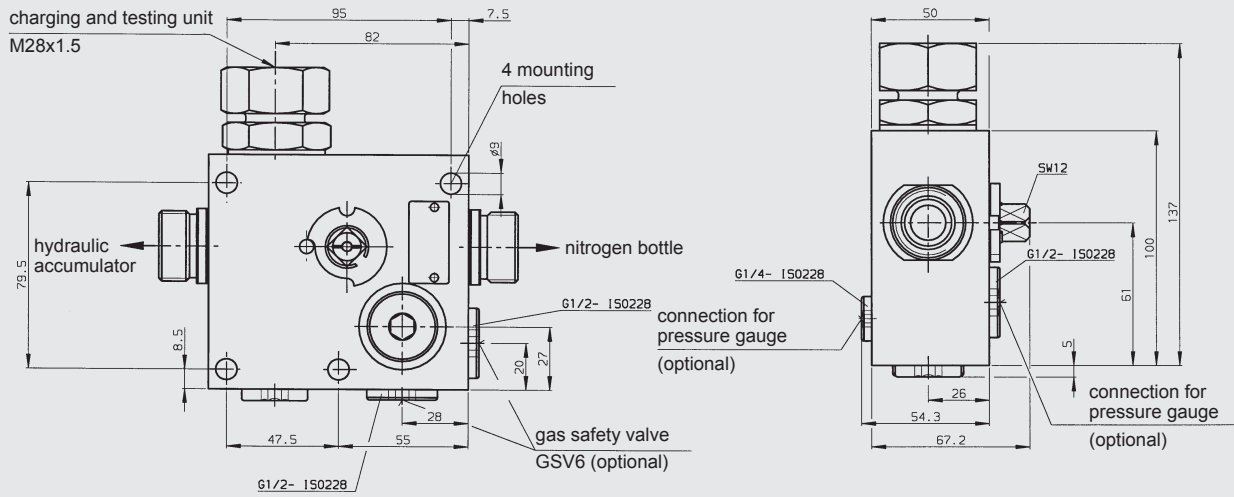


Charging and testing block DN 32

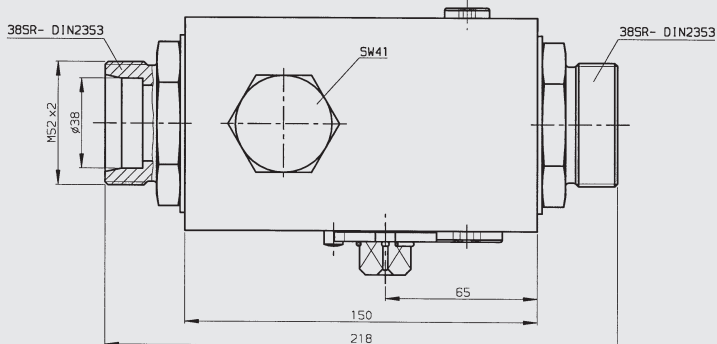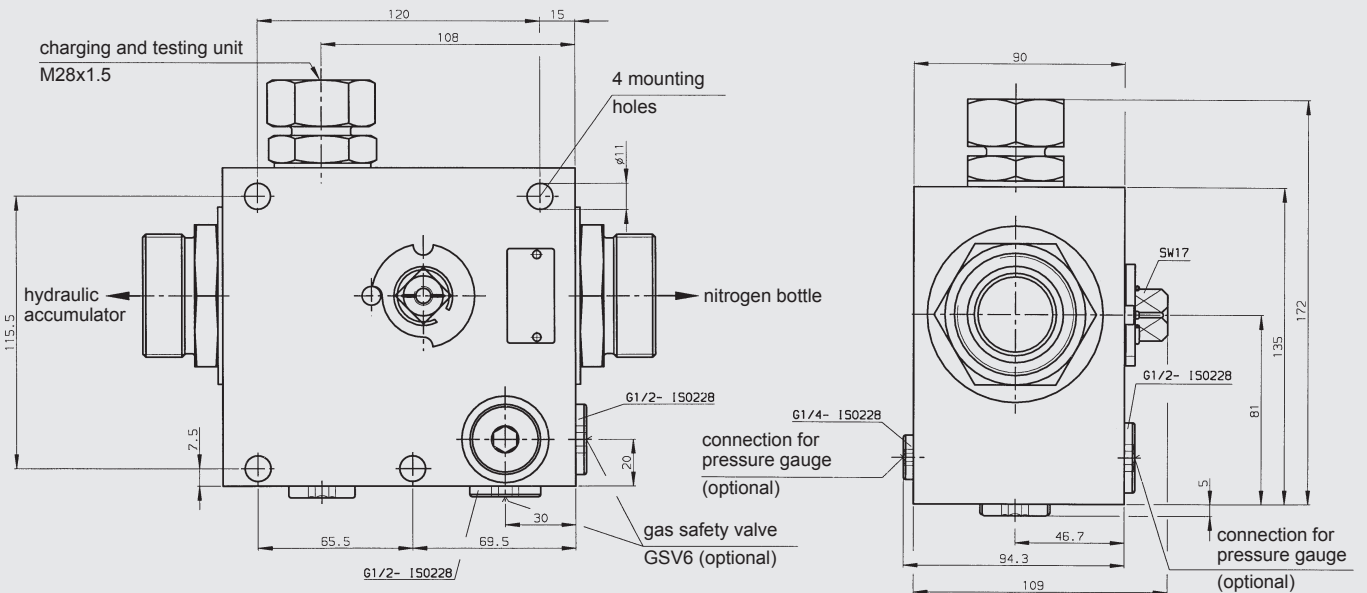

4.2. FPS ADAPTER

The HYDAC FPS adapter is used to charge back-up type hydraulic accumulators. For this it has a connection for the Charging and Testing Unit FPU-1.

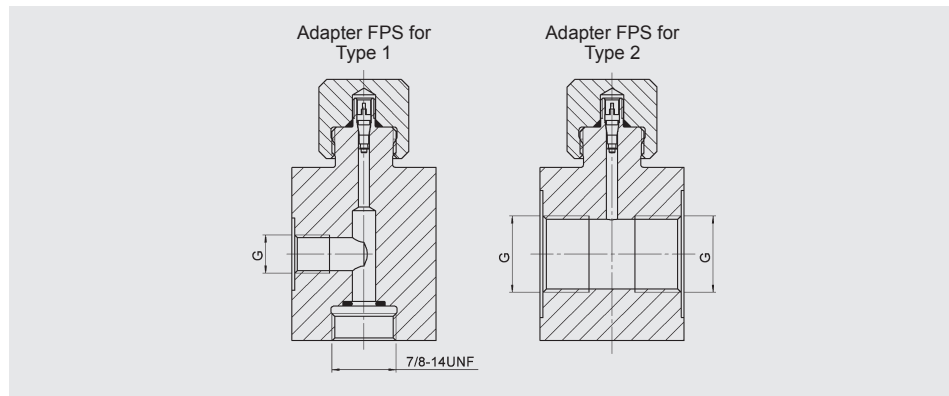


Designation	G ISO228	Part no.	Version
Adapter FPS 7/8-14UNF	G 3/4	363226	1
Adapter FPS	G 3/4	243218	2

4.3. CONDENSATE DRAIN SET

The condensate drain set consists of a throttle valve and a suitable condensate draining hose.

It is used to drain any condensate from the nitrogen bottle, in a controlled way.

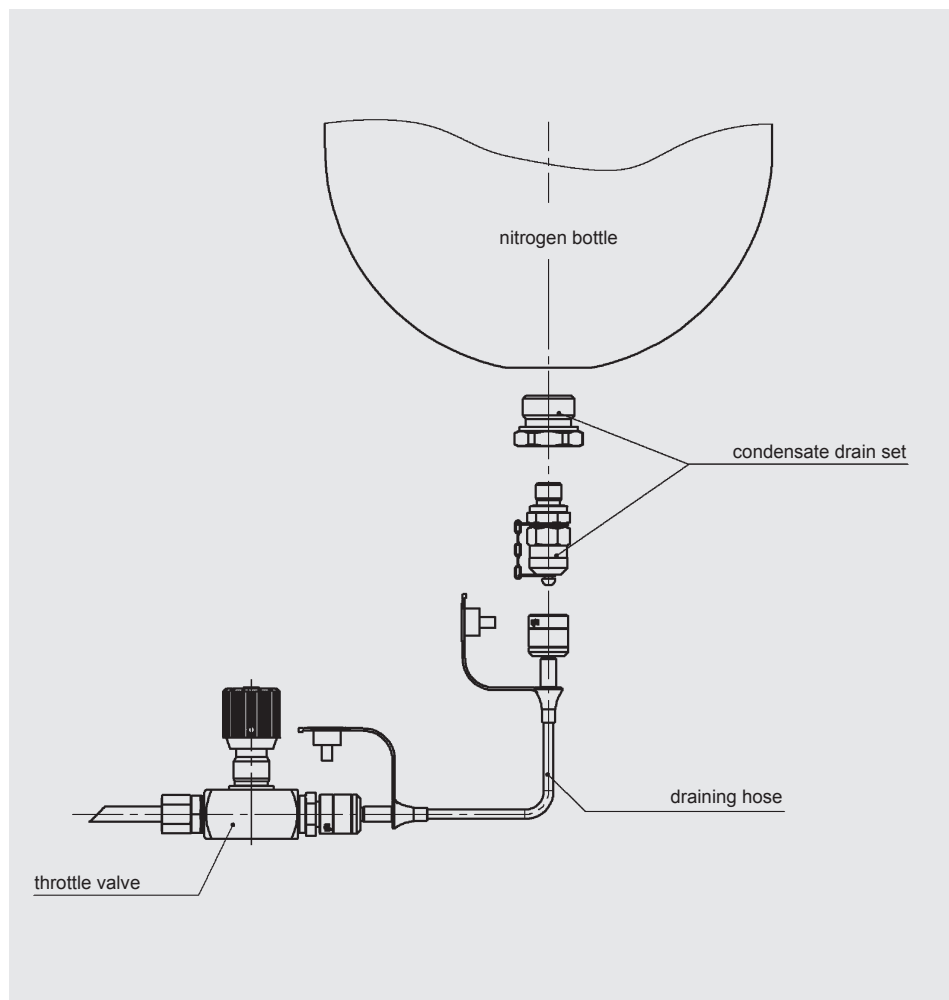

Designation	Length [m]	Part no.
Condensate drain G 3/4 – Minimes M16x1.5	–	3219496
Condensate drain set	0.4	3472820
	1	3472823
	1.6	3472824

4.3. NITROGEN CHARGING UNIT



HYDAC nitrogen charging units facilitate fast and cost-effective charging or testing of the required pre-charge pressures in bladder, diaphragm and piston accumulators. They guarantee optimum use of standard nitrogen bottles up to a residual pressure of 20 bar and a maximum accumulator charging pressure of 350 bar. Portable, mobile and stationary types of N₂-Server are available.

For further information and technical specifications, see catalogue section:

- Nitrogen charging units N₂-Server No. 2.201

5. NOTE

The information in this brochure relates to the operating conditions and applications described. For applications and operating conditions not described, please contact the relevant technical department. Subject to technical modifications.

HYDAC Technology GmbH
 Industriegebiet
66280 Sulzbach/Saar, Germany
 Tel.: +49 (0) 68 97 / 509 - 01
 Fax: +49 (0) 68 97 / 509 - 464
 Internet: www.hydac.com
 E-Mail: speichertechnik@hydac.com

