

**STATIC
LOAD**



30 kN

**DYNAMIC
LOAD**



15 kN

**TORQUE
at 25MPa**



900 Nm

OILFLOW



20 l/min

WEIGHT



18 kg

Rotate left/right
G3/8" Max 250 bar
Grapple open
G3/8" Max 200 bar

Rotator frame
L60 ø25

Fast maintenance
greasing nipple

Grapple close


G3/8"
Max 300 bar

Steel 4 point
fitting system
hose guard

Grapple close
G3/8"

Reliable ø49.5
steel shaft for
fitting the grapple
with ø25 pin

Grapple open
G3/8"

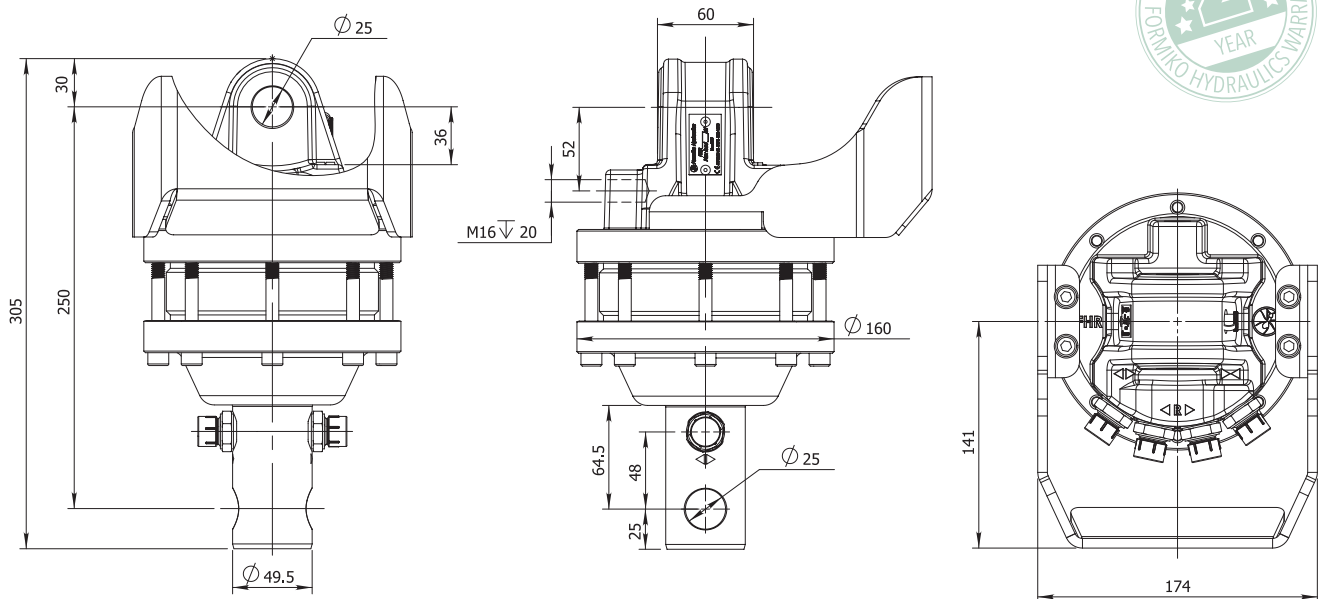

FORESTRY



AGRICULTURE



CONSTRUCTION



GENERAL CARGO



RECYCLING

