
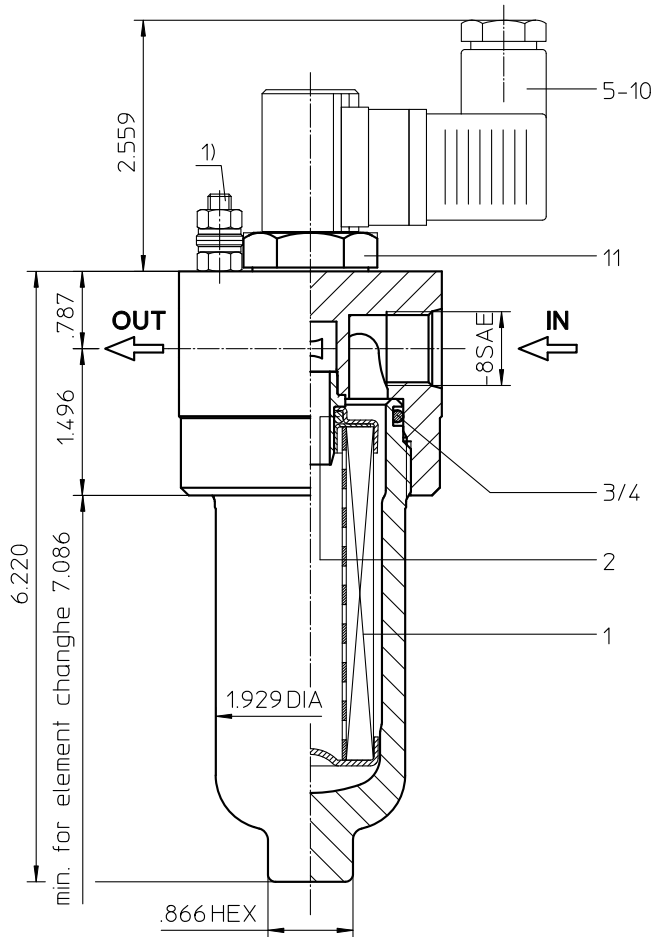


# Series HP 31 6000 PSI

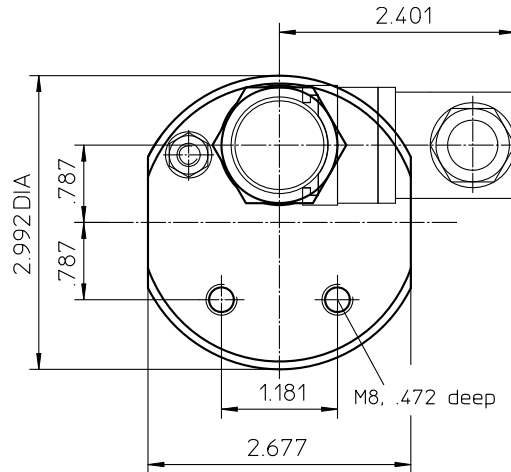

1) Connect the stand grounding tab to a suitable earth ground point.

# Pressure Filter

## Series HP 31

### 6000 PSI

#### Description:

Pressure filter series HP 31 have a working pressure up to 6000 PSI. Pressure peaks can be absorbed with a sufficient safety margin. The HP-filter is in-line mounted.

The filter element consists of star-shaped, pleated filter material, which is supported on the inside by a perforated core tube and is bonded to the end caps with a high-quality adhesive. The flow direction is from outside to inside. Filter elements are available down to 4  $\mu\text{m}_{(c)}$ .

Eaton filter elements are known for high intrinsic stability and an excellent filtration capability, a high dirt-retaining capacity and a long service life.

Eaton filter elements are suitable for all petroleum based fluids, HW-emulsions, most synthetic hydraulic fluids and lubrication oils.

Eaton filter elements are available up to a pressure resistance of  $\Delta p$  2320 PSI and a rupture strength of  $\Delta p$  3625 PSI.

The bypass valve is integrated into the filter head.

After reaching the bypass pressure setting, the bypass valve will send unfiltered partial flow around the filter.

## 1. Type index:

### 1.1. Complete filter: (ordering example)

**HP. 31. 10VG. HR. E. P. - UG. 3. - - AE**

1	2	3	4	5	6	7	8	9	10	11	12
---	---	---	---	---	---	---	---	---	----	----	----

#### 1 series:

HP = pressure filter

#### 2 nominal size: 31

#### 3 filter-material and filter-fineness:

80G, 40G, 25G, 10G stainless steel wire mesh  
25VG, 16VG, 10VG, 6VG, 3VG microglass

#### 4 filter element collapse rating:

30 =  $\Delta p$  435 PSI  
HR =  $\Delta p$  2320 PSI (rupture strength  $\Delta p$  3625 PSI)

#### 5 filter element design:

E = single-end open

#### 6 sealing material:

P = Nitrile (NBR)  
V = Viton (FPM)

#### 7 filter element specification: (see catalog)

- = standard  
VA = stainless steel  
IS06 = for HFC applications, see sheet-no. 31601

#### 8 process connection:

UG = thread connection

#### 9 process connection size:

3 = -8 SAE

#### 10 filter housing specification: (see catalog)

- = standard  
IS06 = for HFC applications, see sheet-no. 31605

#### 11 internal valve:

- = without  
S1 = with by-pass valve  $\Delta p$  51 PSI  
S2 = with by-pass valve  $\Delta p$  102 PSI

#### 12 clogging indicator or clogging sensor:

- = without  
AOR = visual, see sheet-no. 1606  
AOC = visual, see sheet-no. 1606  
AE = visual-electric, see sheet-no. 1615  
VS5 = electronic, see sheet-no. 1619

To add an indicator to your filter, use the corresponding indicator data sheet to find the indicator details and add them to the filter assembly model code.

### 1.2. Filter element: (ordering example)

**01E. 30. 10VG. HR. E. P. -**

1	2	3	4	5	6	7
---	---	---	---	---	---	---

#### 1 series:

01E. = filter element according to company standard

#### 2 nominal size: 30

#### 3 - 7 see type index-complete filter

## Technical data:

design temperature:	14 °F to +212 °F
operating temperature:	14 °F to +176 °F
operating medium	mineral oil, other media on request
max. operating pressure:	6000 PSI
test pressure:	8580 PSI
process connection:	thread connection
housing material:	C-steel
sealing material:	Nitrile (NBR) or Viton (FPM), other materials on request
installation position:	vertical
volume tank:	0.02 Gal

Classified under the Pressure Equipment Directive 2014/68/EC for mineral oil (fluid group 2), Article 4, Para. 3.  
 Classified under ATEX Directive 2014/34/EC according to specific application (see questionnaire sheet-no. 34279-4).

## Pressure drop flow curves:

### Filter calculation/sizing

The pressure drop of the assembly at a given flow rate Q is the sum of the housing  $\Delta p$  and the element  $\Delta p$  and is calculated as follows:

$$\Delta p_{assembly} = \Delta p_{housing} + \Delta p_{element}$$

$$\Delta p_{housing} = (\text{see } \Delta p = f(Q) \text{ - characteristics})$$

$$\Delta p_{element} (PSI) = Q (GPM) \times \frac{MSK}{1000} \left( \frac{PSI}{GPM} \right) \times v (SUS) \times \frac{\rho}{0.876} \left( \frac{kg}{dm^3} \right)$$

For ease of calculation our Filter Selection tool is available online at [www.eatonpowersource.com/calculators/filtration/](http://www.eatonpowersource.com/calculators/filtration/)


### Material gradient coefficients (MSK) for filter elements

The material gradient coefficients in psi/gpm apply to mineral oil (HLP) with a density of 0.876 kg/dm<sup>3</sup> and a kinematic viscosity of 139 SUS (30 mm<sup>2</sup>/s). The pressure drop changes proportionally to the change in kinematic viscosity and density.


HP	VG					G		
	3VG	6VG	10VG	16VG	25VG	25G	40G	80G
31	12.554	8.716	5.580	4.794	3.275	0.2369	0.2369	0.1623

### $\Delta p = f(Q)$ – characteristics according to ISO 3968

The pressure drop characteristics apply to mineral oil (HLP) with a density of 0.876 kg/dm<sup>3</sup>. The pressure drop changes proportionally to the density.

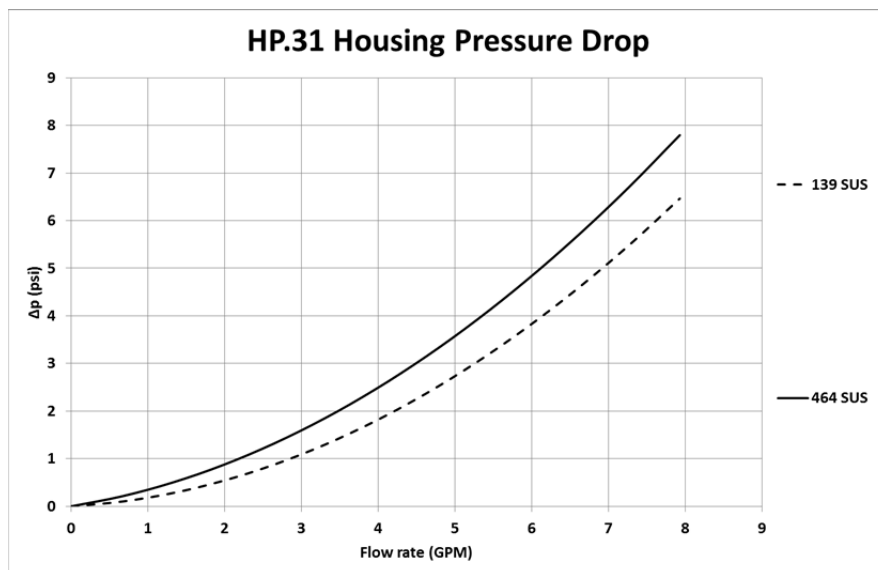

## Symbols:

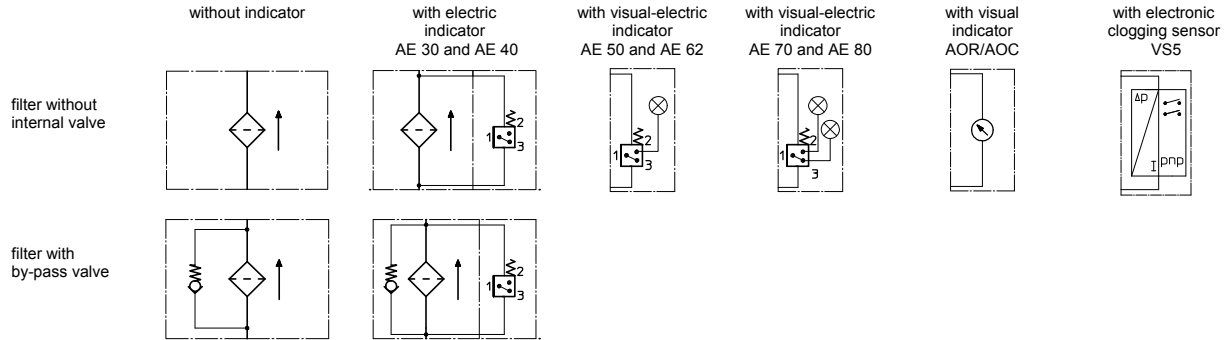

## Spare parts:

item	qty.	designation	dimension	article-no.	
1	1	filter element	01E. 30		
2	1	O-ring	11 x 3	312603 (NBR)	312727 (FPM)
3	1	O-ring	40 x 3	304389 (NBR)	304391 (FPM)
4	1	support ring	48 x 2,6 x 1	305391	
5	1	clogging indicator, visual	AOR or AOC	see sheet-no. 1606	
6	1	clogging indicator, visual-electric	AE	see sheet-no. 1615	
7	1	clogging sensor, electronic	VS5	see sheet-no. 1619	
8	1	O-ring	15 x 1,5	315357 (NBR)	315427 (FPM)
9	1	O-ring	22 x 2	304708 (NBR)	304721 (FPM)
10	1	O-ring	14 x 2	304342 (NBR)	304722 (FPM)
11	1	screw plug	20913-4	309817	

item 11 execution only without clogging indicator or clogging sensor

## Test methods:

Filter elements are tested according to the following ISO standards:

ISO 2941	Verification of collapse/burst resistance
ISO 2942	Verification of fabrication integrity
ISO 2943	Verification of material compatibility with fluids
ISO 3723	Method for end load test
ISO 3724	Verification of flow fatigue characteristics
ISO 3968	Evaluation of pressure drop versus flow characteristics
ISO 16889	Multi-pass method for evaluating filtration performance

### North America

44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

### Europe/Africa/Middle East

Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0

Friedensstraße 41  
68804 Altlußheim, Germany  
Tel: +49 6205 2094-0

An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

### China

No. 3, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

### Singapore

4 Loyang Lane #04-01/02  
Singapore 508914  
Tel: +65 6825-1668

### Brazil

Av. Julia Gaioli, 474 – Bonsucesso  
07251-500 – Guarulhos, Brazil  
Tel: +55 11 2465-8822



## For more information, please

email us at [filtration@eaton.com](mailto:filtration@eaton.com)  
or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)

© 2015 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

# Series HP 61-151

## 6000 PSI

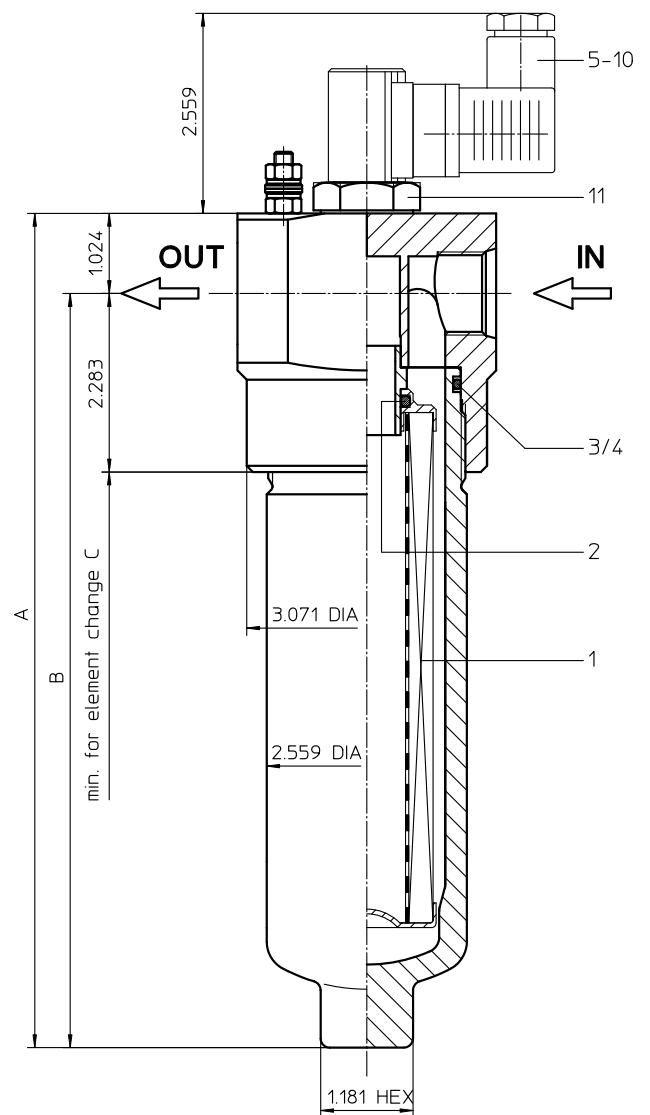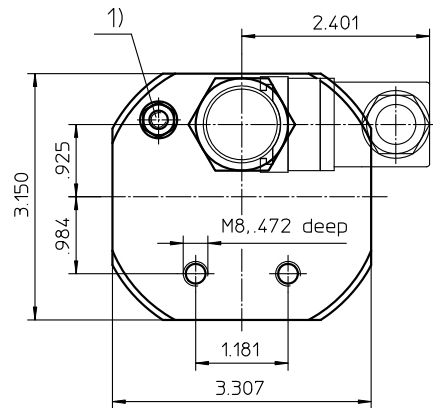

**Dimensions:**

Type	HP 61	HP 91	HP 151
Connection	- 8 SAE	-12 SAE	-16 SAE
A	8.11	10.66	14.96
B	7.08	9.64	13.93
C	10.63	13.19	17.52
Weight approx.	8.80 lbs.	9.90 lbs.	12.10 lbs.
Volume tank	0.08 gal.	0.10 gal.	0.16 gal.

1) Connect the stand grounding tab to a suitable earth ground point.

Dimensions: inches  
 Designs and performance values are subject to change.

# Pressure Filter

## Series HP 61-151

### 6000 PSI

#### Description:

Pressure filter series HP 61-151 have a working pressure up to 6000 PSI. Pressure peaks can be absorbed with a sufficient safety margin. The HP-filter is in-line mounted.

The filter element consists of star-shaped, pleated filter material, which is supported on the inside by a perforated core tube and is bonded to the end caps with a high-quality adhesive. The flow direction is from outside to inside. Filter elements are available down to 4  $\mu\text{m}(\text{c})$ .

Eaton filter elements are known for high intrinsic stability and an excellent filtration capability, a high dirt-retaining capacity and a long service life.

Eaton filter elements are suitable for all petroleum based fluids, HW-emulsions, most synthetic hydraulic fluids and lubrication oils.

Eaton filter elements are available up to a pressure resistance of  $\Delta p$  2320 PSI and a rupture strength of  $\Delta p$  3625 PSI.

The internal valve is integrated into the filter head.

After reaching the bypass pressure setting, the bypass valve will send unfiltered partial flow around the filter.

The reversing valve provides another level of protection for the filter element. The reverse flow will not be filtered.

## 1. Type index:

### 1.1. Complete filter: (ordering example)

**HP. 91. 10VG. HR. E. P. - UG. 4. - - AE**

1	2	3	4	5	6	7	8	9	10	11	12
---	---	---	---	---	---	---	---	---	----	----	----

- |    |  |
|----|--|
| 1  | <b>series:</b><br>HP = pressure filter   |
| 2  | <b>nominal size:</b> 61, 91, 151   |
| 3  | <b>filter-material and filter-fineness:</b><br>80G, 40G, 25G, 10G stainless steel wire mesh<br>25VG, 16VG, 10VG, 6VG, 3VG microglass   |
| 4  | <b>filter element collapse rating:</b><br>30 = $\Delta p$ 435 PSI<br>HR = $\Delta p$ 2320 PSI (rupture strength $\Delta p$ 3625 PSI)   |
| 5  | <b>filter element design:</b><br>E = single-end open   |
| 6  | <b>sealing material:</b><br>P = Nitrile (NBR)<br>V = Viton (FPM)   |
| 7  | <b>filter element specification:</b> (see catalog)<br>- = standard<br>VA = stainless steel<br>IS06 = for HFC applications, see sheet-no. 31601   |
| 8  | <b>process connection:</b><br>UG = thread connection   |
| 9  | <b>process connection size:</b><br>3 = -8 SAE<br>4 = -12 SAE<br>5 = -16 SAE  |
| 10 | <b>filter housing specification:</b> (see catalog)<br>- = standard<br>IS06 = for HFC applications, see sheet no.31605  |
| 11 | <b>internal valve:</b><br>- = without<br>S1 = with bypass valve $\Delta p$ 51 PSI<br>S2 = with bypass valve $\Delta p$ 102 PSI<br>R = reversing valve, $Q \leq 18.50$ GPM  |
| 12 | <b>clogging indicator or clogging sensor:</b><br>- = without<br>AOR = visual, see sheet-no. 1606<br>AOC = visual, see sheet-no. 1606<br>AE = visual-electric, see sheet-no. 1615<br>VS5 = electronic, see sheet-no. 1619 |

To add an indicator to your filter, use the corresponding indicator data sheet to find the indicator details and add them to the filter assembly model code.

### 1.2. Filter element: (ordering example)

**01E. 90. 10VG. HR. E. P. -**

1	2	3	4	5	6	7
---	---	---	---	---	---	---

- |   |   |
|---|---|
| 1 | <b>series:</b><br>01E. = filter element according to company standard |
| 2 | <b>nominal size:</b> 60, 90, 150                                      |
| 3 | - 7   see type index-complete filter                                  |

## Technical data:

design temperature:	14 °F to +212 °F
operating temperature:	14 °F to +176 °F
operating medium:	mineral oil, other media on request
max. operating pressure:	6000 PSI
test pressure:	8580 PSI
process connection:	thread connection
housing material:	C-steel
sealing material:	Nitrile (NBR) or Viton (FPM), other materials on request
installation position:	vertical

Classified under the Pressure Equipment Directive 2014/68/EC for mineral oil (fluid group 2), Article 4, Para. 3.  
 Classified under ATEX Directive 2014/34/EC according to specific application (see questionnaire sheet-no. 34279-4)

## Pressure drop flow curves:

### Filter calculation/sizing

The pressure drop of the assembly at a given flow rate Q is the sum of the housing  $\Delta p$  and the element  $\Delta p$  and is calculated as follows:

$$\Delta p_{assembly} = \Delta p_{housing} + \Delta p_{element}$$

$$\Delta p_{housing} = (\text{see } \Delta p = f(Q) - \text{characteristics})$$

$$\Delta p_{element} (PSI) = Q (GPM) \times \frac{MSK}{1000} \left( \frac{PSI}{GPM} \right) \times \nu (SUS) \times \frac{\rho}{0.876} \left( \frac{kg}{dm^3} \right)$$

For ease of calculation our Filter Selection tool is available online at [www.eatonpowersource.com/calculators/filtration/](http://www.eatonpowersource.com/calculators/filtration/)


### Material gradient coefficients (MSK) for filter elements

The material gradient coefficients in PSI/GPM apply to mineral oil (HLP) with a density of 0.876 kg/dm<sup>3</sup> and a kinematic viscosity of 139 SUS (30 mm<sup>2</sup>/s). The pressure drop changes proportionally to the change in kinematic viscosity and density.


HP	VG					G		
	3VG	6VG	10VG	16VG	25VG	25G	40G	80G
61	6.748	4.685	2.999	2.577	1.760	0.2002	0.1868	0.1280
91	4.059	2.818	1.804	1.550	1.059	0.1210	0.1130	0.0774
151	2.422	1.681	1.076	0.925	0.632	0.0723	0.0675	0.0462

### $\Delta p = f(Q)$ – characteristics according to ISO 3968

The pressure drop characteristics apply to mineral oil (HLP) with a density of 0.876 kg/dm<sup>3</sup>. The pressure drop changes proportionally to the density.

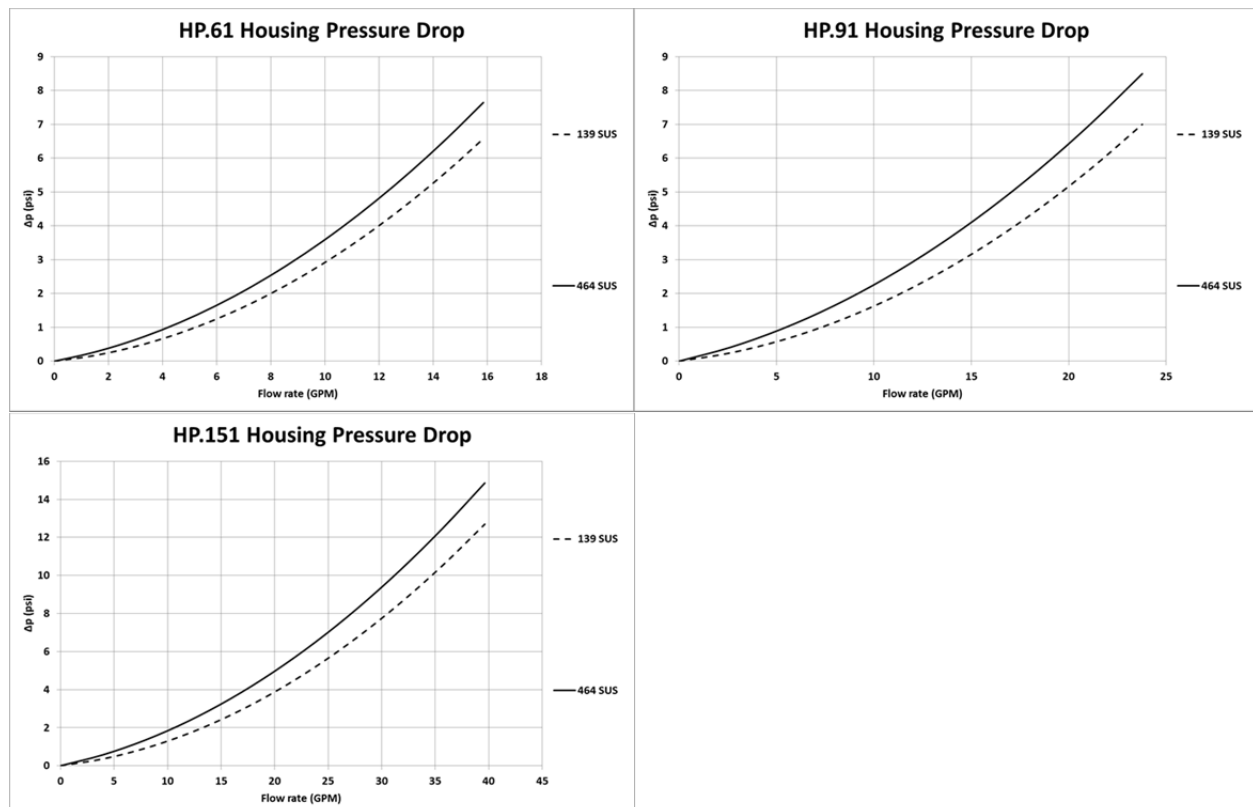

## Symbols:

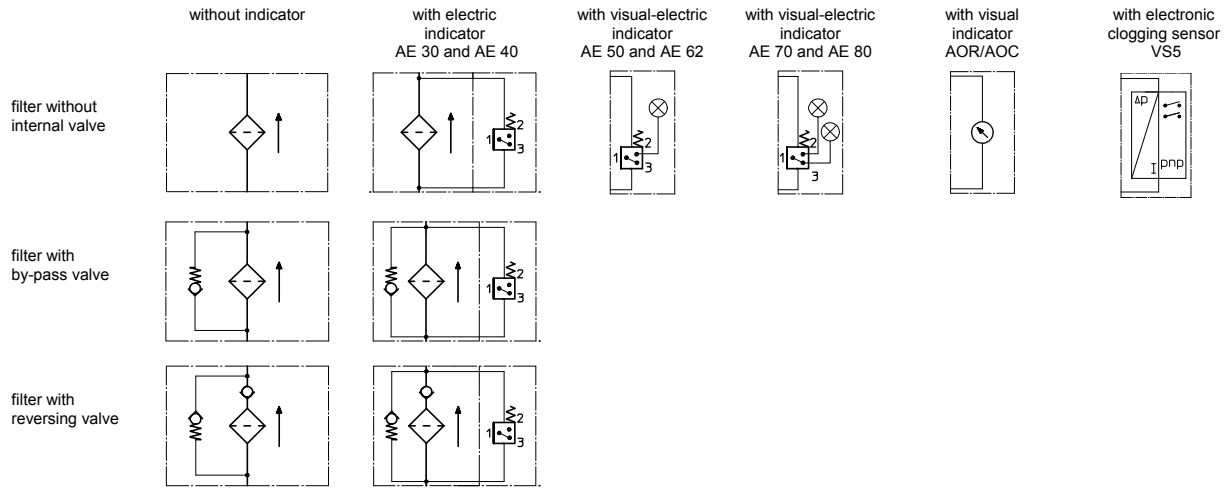

## Spare parts:

item	qty.	designation	dimension			article-no.	
			HP61	HP91	HP151		
1	1	filter element	01E.60...	01E.90...	01E.150...		
2	1	O-ring		11 x 3		312603 (NBR)	312727 (FPM)
3	1	O-ring		40 x 3		304389 (NBR)	304391 (FPM)
4	1	support ring		48 x 2,6 x 1			305391
5	1	clogging indicator, visual		AOR or AOC		see sheet-no. 1606	
6	1	clogging indicator, visual-electric		AE		see sheet-no. 1615	
7	1	clogging sensor, electronic		VS5		see sheet-no. 1619	
8	1	O-ring		15 x 1,5		315357 (NBR)	315427 (FPM)
9	1	O-ring		22 x 2		304708 (NBR)	304721 (FPM)
10	1	O-ring		14 x 2		304342 (NBR)	304722 (FPM)
11	1	screw plug		20913-4		309817	

item 11 execution only without clogging indicator or clogging sensor

## Test methods:

Filter elements are tested according to the following ISO standards:

ISO 2941	Verification of collapse/burst resistance
ISO 2942	Verification of fabrication integrity
ISO 2943	Verification of material compatibility with fluids
ISO 3723	Method for end load test
ISO 3724	Verification of flow fatigue characteristics
ISO 3968	Evaluation of pressure drop versus flow characteristics
ISO 16889	Multi-pass method for evaluating filtration performance

### North America

44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

### Europe/Africa/Middle East

Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0

Friedensstraße 41  
68804 Altlußheim, Germany  
Tel: +49 6205 2094-0

An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

### China

No. 3, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

### Singapore

4 Loyang Lane #04-01/02  
Singapore 508914  
Tel: +65 6825-1668

### Brazil

Av. Julia Gaioli, 474 – Bonsucesso  
07251-500 – Guarulhos, Brazil  
Tel: +55 11 2465-8822



## For more information, please

email us at [filtration@eaton.com](mailto:filtration@eaton.com)  
or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)

© 2015 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.



# Series HP 170-450 6000 PSI

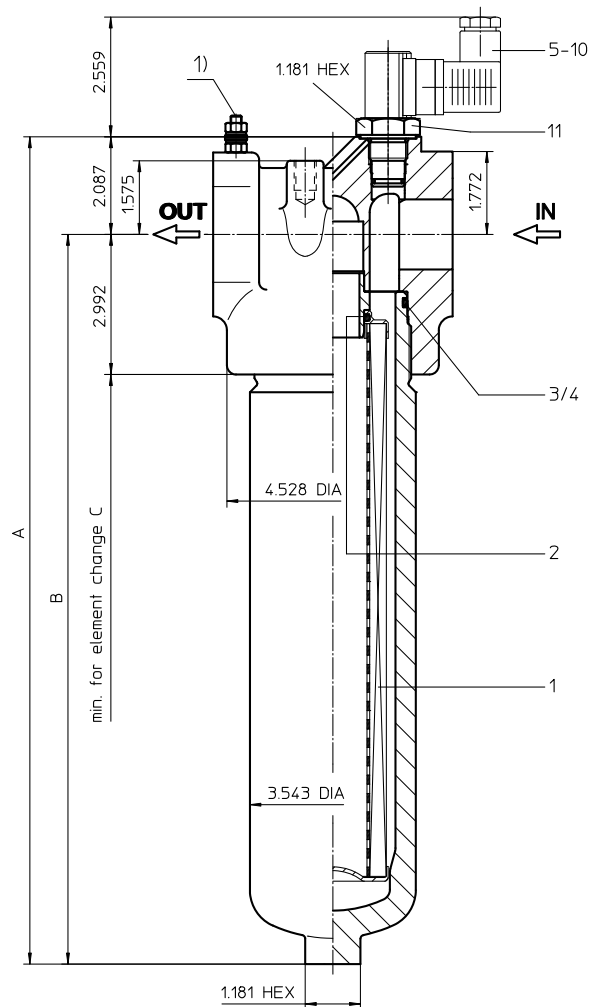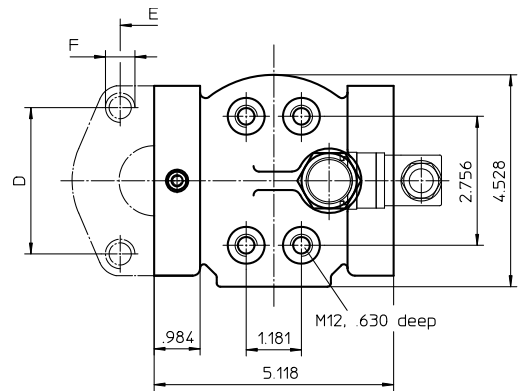

**Dimensions:**

type	HP 170	HP 240	HP 360	HP 450
connection	1 1/2" SAE			
A	12.56	14.49	17.68	21.81
B	10.47	12.44	15.59	19.72
C	13.78	15.75	18.90	23.03
D	3.13			
E	1.45			
F	M16, .79 deep			
weight	28.6 lbs.	30.8 lbs.	35.2 lbs.	41.8 lbs.
volume tank	0.18 Gal.	0.23 Gal.	0.31 Gal.	0.42 Gal.

1) Connect the stand grounding tab to a suitable earth ground point.

Dimensions: inches  
Designs and performance values are subject to change.



Powering Business Worldwide

# Pressure Filter

## Series HP 170-450

### 6000 PSI

#### Description:

Pressure filter series HP 170-450 have a working pressure up to 6000 PSI. Pressure peaks can be absorbed with a sufficient safety margin. The HP-filter is in-line mounted.

The filter element consists of star-shaped, pleated filter material, which is supported on the inside by a perforated core tube and is bonded to the end caps with a high-quality adhesive. The flow direction is from outside to inside. Filter elements are available down to 4  $\mu\text{m}_{(c)}$ .

Eaton filter elements are known for high intrinsic stability and an excellent filtration capability, a high dirt-retaining capacity and a long service life.

Eaton filter elements are suitable for all petroleum based fluids, HW-emulsions, most synthetic hydraulic fluids and lubrication oils.

Eaton filter elements are available up to a pressure resistance of  $\Delta p$  2320 PSI and a rupture strength of  $\Delta p$  3625 PSI.

The internal valve is integrated into the filter head.

After reaching the bypass pressure setting, the bypass valve will send unfiltered partial flow around the filter.

The reversing valve provides another level of protection for the filter element. The reverse flow will not be filtered.

## 1. Type index:

### 1.1. Complete filter: (ordering example)

**HP. 170. 10VG. HR. E. P. - . FS. 7. - . - . AE**

1	2	3	4	5	6	7	8	9	10	11	12
---	---	---	---	---	---	---	---	---	----	----	----

- 1 | **series:**  
HP = pressure filter
- 2 | **nominal size:** 170, 240, 360, 450
- 3 | **filter-material and filter-fineness:**  
80G, 40G, 25G, 10G stainless steel wire mesh  
25VG, 16VG, 10VG, 6VG, 3VG glass fiber
- 4 | **filter element collapse rating:**  
30 =  $\Delta p$  435 PSI  
HR =  $\Delta p$  2320 PSI (rupture strength  $\Delta p$  3625 PSI)
- 5 | **filter element design:**  
E = single-end open
- 6 | **sealing material:**  
P = Nitrile (NBR)  
V = Viton (FPM)
- 7 | **filter element specification:** (see catalog)  
- = standard  
VA = stainless steel  
IS06 = for HFC applications, see sheet-no. 31601
- 8 | **process connection:**  
FS = SAE-flange 6000 PSI
- 9 | **process connection size:**  
7 = 1 1/2"
- 10 | **filter housing specification:** (see catalog)  
- = standard  
IS06 = for HFC applications, see sheet-no. 31605
- 11 | **internal valve:**  
- = without  
S1 = with bypass valve  $\Delta p$  51 PSI  
S2 = with bypass valve  $\Delta p$  102 PSI  
R = reversing valve, Q  $\leq$  55.75 GPM
- 12 | **clogging indicator or clogging sensor:**  
- = without  
AOR = visual, see sheet-no. 1606  
AOC = visual, see sheet-no. 1606  
AE = visual-electric, see sheet-no. 1615  
VS5 = electronic, see sheet-no. 1619

To add an indicator to your filter, use the corresponding indicator data sheet to find the indicator details and add them to the filter assembly model code.

### 1.2. Filter element: (ordering example)

**01E. 170. 10VG. HR. E. P. -**

1	2	3	4	5	6	7
---	---	---	---	---	---	---

- 1 | **series:**  
01E. = filter element according to company standard
- 2 | **nominal size:** 170, 240, 360, 450
- 3 | - 7 | see type index-complete filter

## Technical data:

design temperature:	14 °F to +212 °F
operating temperature:	14 °F to +176 °F
operating medium	mineral oil, other media on request
max. operating pressure:	6000 PSI
test pressure:	8580 PSI
process connection:	SAE-flange 6000 PSI
housing material:	EN-GJS-400-18-LT; C-steel (filter bowl)
sealing material:	Nitrile (NBR) or Viton (FPM), other materials on request
installation position:	vertical

Classified under the Pressure Equipment Directive 2014/68/EC for mineral oil (fluid group 2), Article 4, Para. 3.  
Classified under ATEX Directive 2014/34/EC according to specific application (see questionnaire sheet-no. 34279-4).

## Pressure drop flow curves:

### Filter calculation/sizing

The pressure drop of the assembly at a given flow rate Q is the sum of the housing  $\Delta p$  and the element  $\Delta p$  and is calculated as follows:

$$\Delta p_{assembly} = \Delta p_{housing} + \Delta p_{element}$$

$$\Delta p_{housing} = (\text{see } \Delta p = f(Q) - \text{characteristics})$$

$$\Delta p_{element} (PSI) = Q (GPM) \times \frac{MSK}{1000} \left( \frac{PSI}{GPM} \right) \times v (SUS) \times \frac{\rho}{0.876} \left( \frac{kg}{dm^3} \right)$$

For ease of calculation our Filter Selection tool is available online at [www.eatonpowersource.com/calculators/filtration/](http://www.eatonpowersource.com/calculators/filtration/)


### Material gradient coefficients (MSK) for filter elements

The material gradient coefficients in PSI/GPM apply to mineral oil (HLP) with a density of 0.876 kg/dm<sup>3</sup> and a kinematic viscosity of 139 SUS (30 mm<sup>2</sup>/s). The pressure drop changes proportionally to the change in kinematic viscosity and density.


HP	VG					G		
	3VG	6VG	10VG	16VG	25VG	25G	40G	80G
170	2.714	1.884	1.206	1.036	0.708	0.0839	0.0783	0.0537
240	2.092	1.452	0.930	0.799	0.546	0.0651	0.0607	0.0416
360	1.530	1.062	0.680	0.584	0.399	0.0475	0.0444	0.0304
450	1.126	0.782	0.500	0.430	0.294	0.0349	0.0326	0.0223

### $\Delta p = f(Q)$ – characteristics according to ISO 3968

The pressure drop characteristics apply to mineral oil (HLP) with a density of 0.876 kg/dm<sup>3</sup>. The pressure drop changes proportionally to the density.

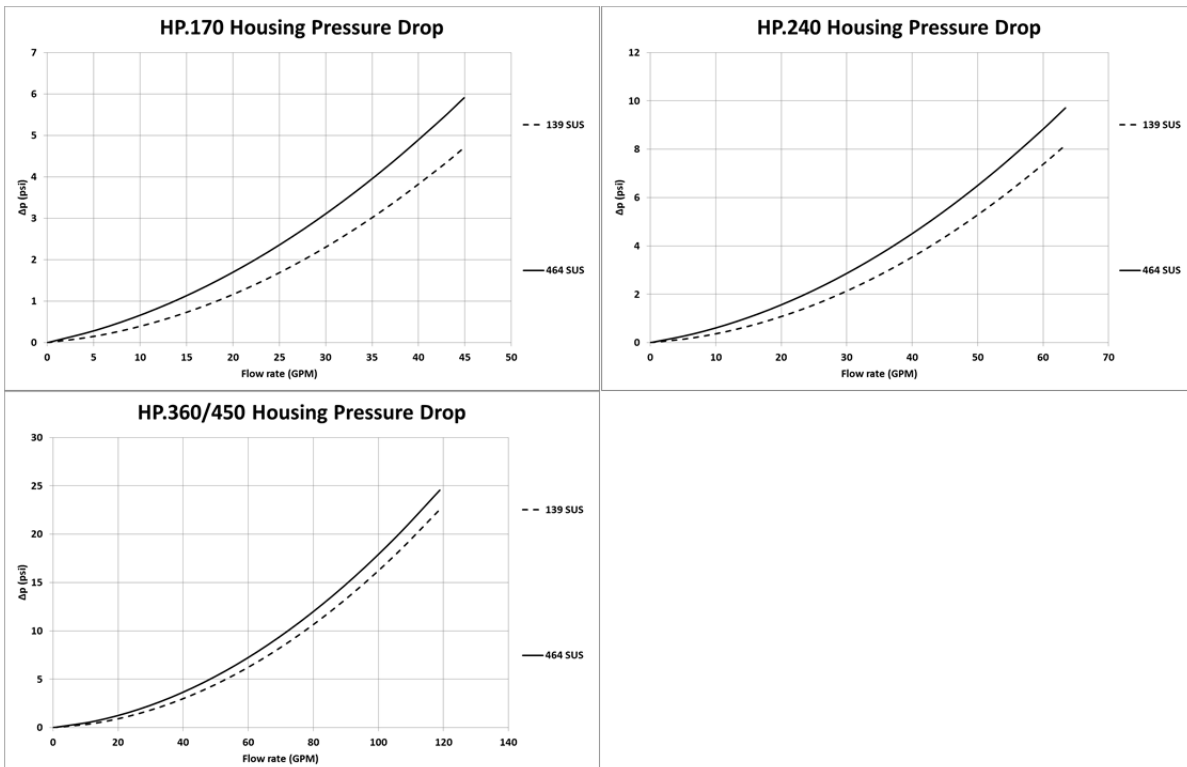

## Symbols:

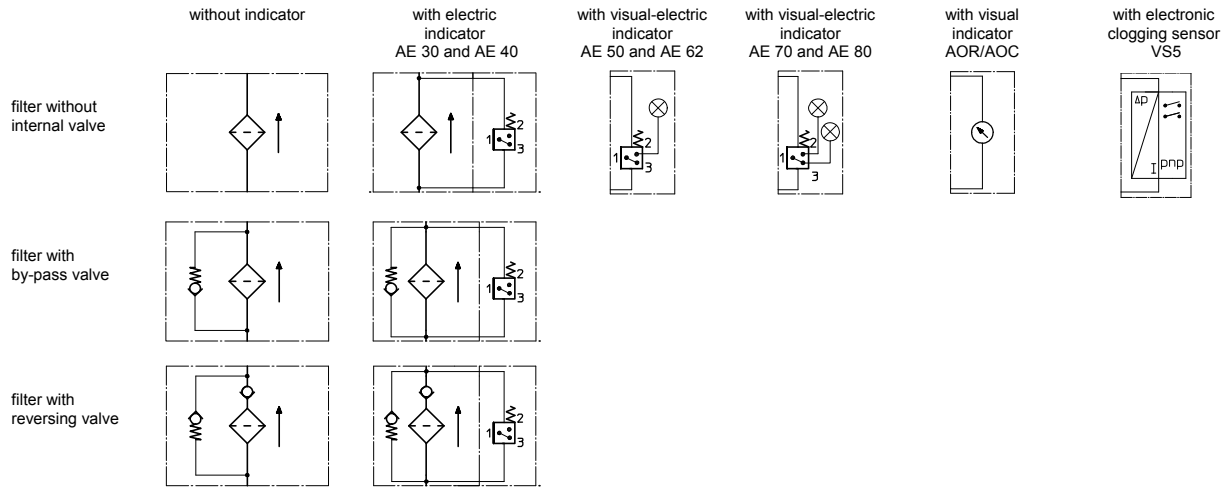

## Spare parts:

item	qty.	designation	dimension				article-no.	
			HP 170 01E.170...	HP 240 01E.240...	HP 360 01E.360...	HP 450 01E.450...		
1	1	filter element						
2	1	O-ring					304338 (NBR)	304730 (FPM)
3	1	O-ring					302215 (NBR)	304729 (FPM)
4	1	support ring						304581
5	1	clogging indicator visual						see sheet-no. 1606
6	1	clogging indicator visual-electric						see sheet-no. 1615
7	1	clogging sensor electronic						see sheet-no. 1619
8	1	O-ring					315357 (NBR)	315427 (FPM)
9	1	O-ring					304708 (NBR)	304721 (FPM)
10	1	O-ring					304342 (NBR)	304722 (FPM)
11	1	screw plug						309817

item 11 execution only without clogging indicator or clogging sensor

## Test methods:

Filter elements are tested according to the following ISO standards:

ISO 2941	Verification of collapse/burst resistance
ISO 2942	Verification of fabrication integrity
ISO 2943	Verification of material compatibility with fluids
ISO 3723	Method for end load test
ISO 3724	Verification of flow fatigue characteristics
ISO 3968	Evaluation of pressure drop versus flow characteristics
ISO 16889	Multi-pass method for evaluating filtration performance

### North America

44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

### Europe/Africa/Middle East

Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0

Friedensstraße 41  
68804 Altlußheim, Germany  
Tel: +49 6205 2094-0

An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

### China

No. 3, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

### Singapore

4 Loyang Lane #04-01/02  
Singapore 508914  
Tel: +65 6825-1668

### Brazil

Av. Julia Gaioli, 474 – Bonsucesso  
07251-500 – Guarulhos, Brazil  
Tel: +55 11 2465-8822

## For more information, please

email us at [filtration@eaton.com](mailto:filtration@eaton.com)



or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)

© 2015 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

# Series HP 171-451 6000 PSI

**Dimensions:**

type	HP 171		
connection	-16SAE	-20SAE	-24SAE
A	11.33	11.61	11.81
B	10.23	10.35	10.43
C	13.77	13.77	13.77
D	1.10	1.25	1.37
E	2.75	2.87	2.95
F	4.40	4.56	4.56
weight	24 lbs.	25 lbs.	26 lbs.
volume tank	0.18 Gal.		
type	HP 241		
connection	-16SAE	-20SAE	-24SAE
A	11.33	11.61	11.81
B	10.23	10.35	10.43
C	13.77	13.77	13.77
D	1.10	1.25	1.37
E	2.75	2.87	2.95
F	4.40	4.56	4.56
weight	24 lbs.	25 lbs.	26 lbs.
volume tank	23 Gal.		
type	HP 361		
connection	-16SAE	-20SAE	-24SAE
A	16.45	16.73	16.92
B	15.35	15.47	15.55
C	18.89	18.89	18.89
D	1.10	1.25	1.37
E	2.75	2.87	2.95
F	4.40	4.56	4.56
weight	31 lbs.	32 lbs.	33 lbs.
volume tank	0.31 Gal.		
type	HP 451		
connection	-16SAE	-20SAE	-24SAE
A	20.59	20.86	21.06
B	19.48	19.60	19.68
C	23.03	23.03	23.03
D	1.10	1.25	1.37
E	2.75	2.87	2.95
F	4.40	4.56	4.56
weight	36 lbs.	38 lbs.	39 lbs.
volume tank	0.42 Gal.		

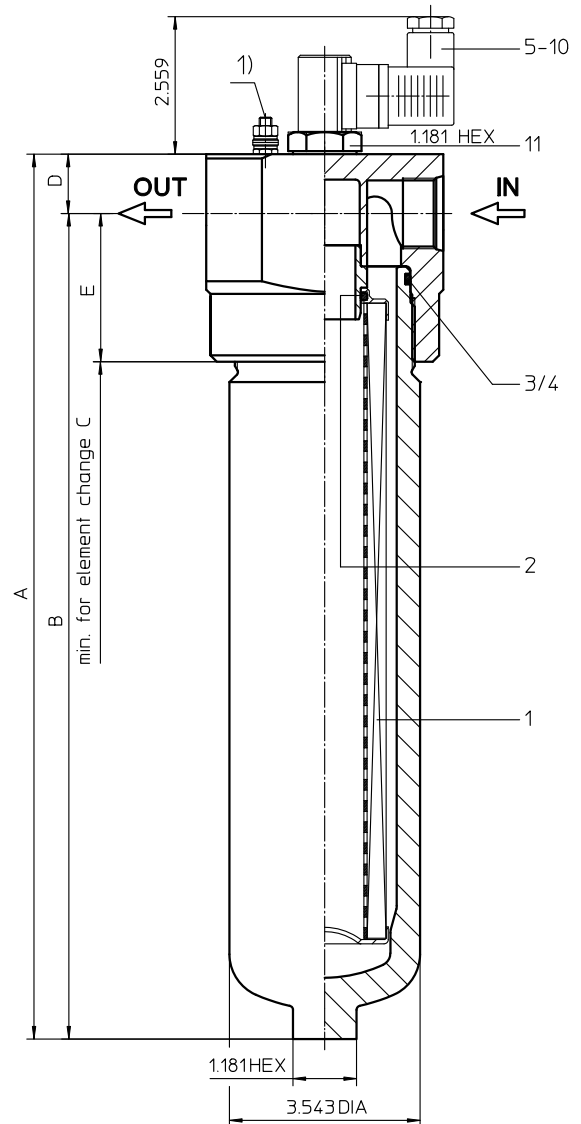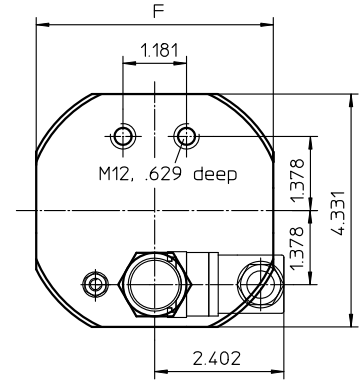

1) Connect the stand grounding tab to a suitable earth ground point.



Powering Business Worldwide

Dimensions: inches  
Designs and performance values are subject to change.

# Pressure Filter

## Series HP 171-451

### 6000 PSI

#### Description:

Pressure filter series HP 171-451 have a working pressure up to 6000 PSI. Pressure peaks can be absorbed with a sufficient safety margin. The HP-filter is in-line mounted.

The filter element consists of star-shaped, pleated filter material, which is supported on the inside by a perforated core tube and is bonded to the end caps with a high-quality adhesive. The flow direction is from outside to inside. Filter elements are available down to 4  $\mu\text{m}_{(c)}$ .

Eaton filter elements are known for high intrinsic stability and an excellent filtration capability, a high dirt-retaining capacity and a long service life.

Eaton filter elements are suitable for all petroleum based fluids, HW-emulsions, most synthetic hydraulic fluids and lubrication oils.

Eaton filter elements are available up to a pressure resistance of  $\Delta p$  2320 PSI and a rupture strength of  $\Delta p$  3625 PSI.

The bypass valve is integrated into the filter head.

After reaching the bypass pressure setting, the bypass valve will send unfiltered partial flow around the filter.

The reversing valve provides another level of protection for the filter element. The reverse flow will not be filtered.

#### 1. Type index:

##### 1.1. Complete filter: (ordering example)

**HP. 171. 10VG. HR. E. P. - UG. 5. - - AE**

1	2	3	4	5	6	7	8	9	10	11	12
---	---	---	---	---	---	---	---	---	----	----	----

- 1 | **series:**  
HP = pressure filter
- 2 | **nominal size:** 171, 241, 361, 451
- 3 | **filter-material and filter-fineness:**  
80G, 40G, 25G, 10G stainless steel wire mesh  
25VG, 16VG, 10VG, 6VG, 3VG microglass
- 4 | **filter element collapse rating:**  
30 =  $\Delta p$  435 PSI  
HR =  $\Delta p$  2320 PSI (rupture strength  $\Delta p$  3625 PSI)
- 5 | **filter element design:**  
E = single-end open
- 6 | **sealing material:**  
P = Nitrile (NBR)  
V = Viton (FPM)
- 7 | **filter element specification:** (see catalog)  
- = standard  
VA = stainless steel  
IS06 = for HFC applications, see sheet-no. 31601
- 8 | **process connection:**  
UG = thread connection
- 9 | **process connection size:**  
5 = -16 SAE  
6 = -20 SAE  
7 = -24 SAE
- 10 | **filter housing specification:** (see catalog)  
- = standard  
IS06 = for HFC applications, see sheet-no. 31605
- 11 | **internal valve:**  
- = without  
S1 = with by-pass valve  $\Delta p$  51 PSI  
S2 = with by-pass valve  $\Delta p$  102 PSI  
R = reversing valve,  $Q \leq 55.75$  GPM
- 12 | **clogging indicator or clogging sensor:**  
- = without  
AOR = visual, see sheet-no. 1606  
AOC = visual, see sheet-no. 1606  
AE = visual-electric, see sheet-no. 1615  
VS5 = electronic, see sheet-no. 1619

To add an indicator to your filter, use the corresponding indicator data sheet to find the indicator details and add them to the filter assembly model code.

##### 1.2. Filter element: (ordering example)

**01E. 170. 10VG. HR. E. P. -**

1	2	3	4	5	6	7
---	---	---	---	---	---	---

- 1 | **series:**  
01E. = filter element according to company standard
- 2 | **nominal size:** 170, 240, 360, 450
- 3 | - 7 | see type index-complete filter

## Technical data:

design temperature:	14 °F to +212 °F
operating temperature:	14 °F to +176 °F
operating medium	mineral oil, other media on request
max. operating pressure:	6000 PSI
test pressure:	8580 PSI
process connection:	thread connection
housing material:	C-steel
sealing material:	Nitrile (NBR) or Viton (FPM), other materials on request
installation position:	vertical

Classified under the Pressure Equipment Directive 2014/68/EC for mineral oil (fluid group 2), Article 4, Para. 3.  
Classified under ATEX Directive 2014/34/EC according to specific application (see questionnaire sheet-no. 34279-4).

## Pressure drop flow curves:

### Filter calculation/sizing

The pressure drop of the assembly at a given flow rate Q is the sum of the housing  $\Delta p$  and the element  $\Delta p$  and is calculated as follows:

$$\Delta p_{assembly} = \Delta p_{housing} + \Delta p_{element}$$

$$\Delta p_{housing} = (\text{see } \Delta p = f(Q) - \text{characteristics})$$

$$\Delta p_{element} (PSI) = Q (GPM) \times \frac{MSK}{1000} \left( \frac{PSI}{GPM} \right) \times v (SUS) \times \frac{\rho}{0.876} \left( \frac{kg}{dm^3} \right)$$

For ease of calculation our Filter Selection tool is available online at [www.eatonpowersource.com/calculators/filtration/](http://www.eatonpowersource.com/calculators/filtration/)


### Material gradient coefficients (MSK) for filter elements

The material gradient coefficients in PSI/GPM apply to mineral oil (HLP) with a density of 0.876 kg/dm<sup>3</sup> and a kinematic viscosity of 139 SUS (30 mm<sup>2</sup>/s). The pressure drop changes proportionally to the change in kinematic viscosity and density.


HP	VG					G		
	3VG	6VG	10VG	16VG	25VG	25G	40G	80G
171	2.714	1.884	1.206	1.036	0.708	0.0839	0.0783	0.0537
241	2.092	1.452	0.930	0.799	0.546	0.0651	0.0607	0.0416
361	1.530	1.062	0.680	0.584	0.399	0.0475	0.0444	0.0304
451	1.126	0.782	0.500	0.430	0.294	0.0349	0.0326	0.0223

### $\Delta p = f(Q)$ – characteristics according to ISO 3968

The pressure drop characteristics apply to mineral oil (HLP) with a density of 0.876 kg/dm<sup>3</sup>. The pressure drop changes proportionally to the density.

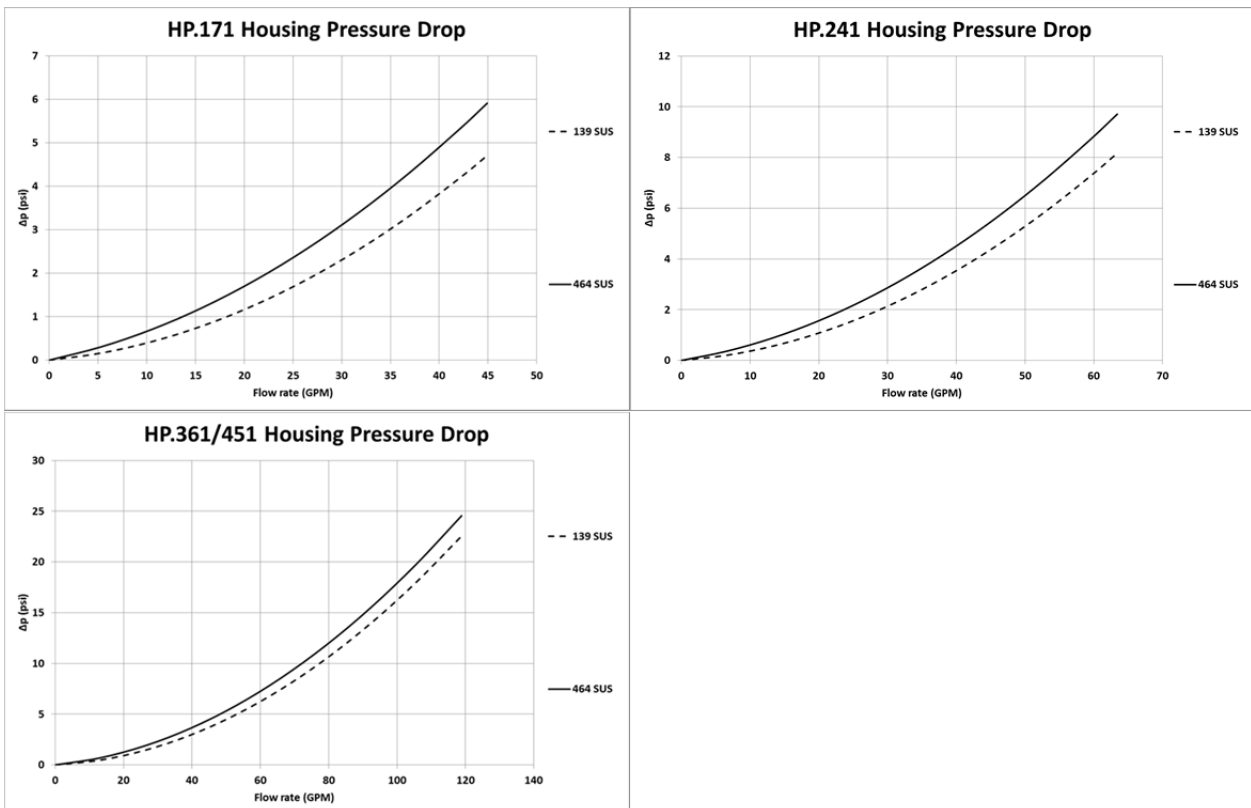

## Symbols:

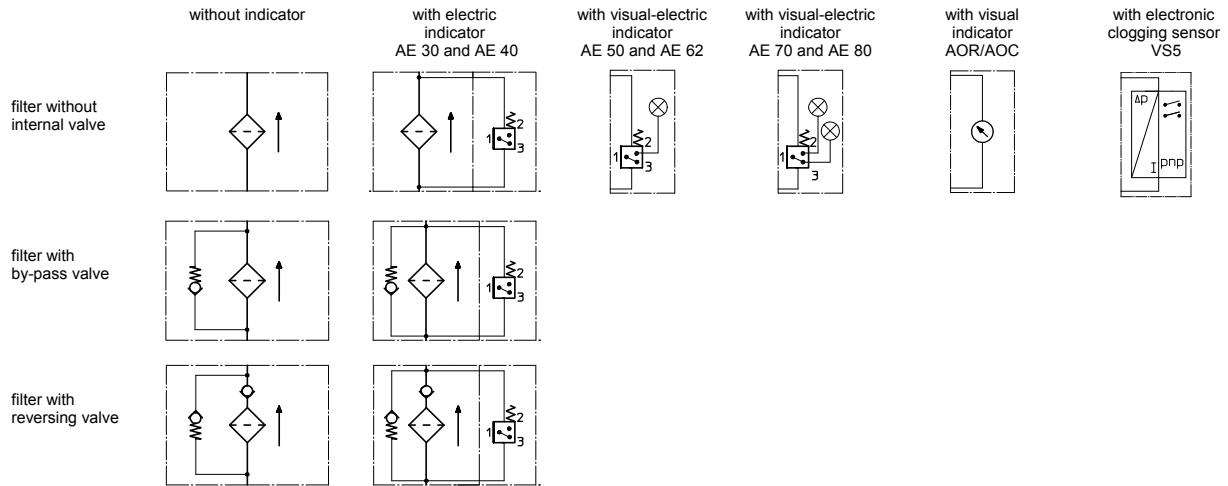

## Spare parts:

item	qty.	designation	dimension				article-no.	
			HP 171	HP 241	HP 361	HP 451		
1	1	filter element	01E.170...	01E.240...	01E.360...	01E.450...		
2	1	O-ring	34 x 3,5				304338 (NBR)	304730 (FPM)
3	1	O-ring	75 x 3				302215 (NBR)	304729 (FPM)
4	1	support ring	81 x 2,6 x 1				304581	
5	1	clogging indicator visual	AOR or AOC				see sheet-no. 1606	
6	1	clogging indicator visual-electric	AE				see sheet-no. 1615	
7	1	clogging sensor electronic	VS5				see sheet-no. 1619	
8	1	O-ring	15 x 1,5				315357 (NBR)	315427 (FPM)
9	1	O-ring	22 x 2				304708 (NBR)	304721 (FPM)
10	1	O-ring	14 x 2				304342 (NBR)	304722 (FPM)
11	1	screw plug	20913-4				309817	

item 11 execution only without clogging indicator or clogging sensor

## Test methods:

Filter elements are tested according to the following ISO standards:

ISO 2941	Verification of collapse/burst resistance
ISO 2942	Verification of fabrication integrity
ISO 2943	Verification of material compatibility with fluids
ISO 3723	Method for end load test
ISO 3724	Verification of flow fatigue characteristics
ISO 3968	Evaluation of pressure drop versus flow characteristics
ISO 16889	Multi-pass method for evaluating filtration performance

### North America

44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

### Europe/Africa/Middle East

Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0

Friedensstraße 41  
68804 Altlußheim, Germany  
Tel: +49 6205 2094-0

An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

### China

No. 3, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

### Singapore

4 Loyang Lane #04-01/02  
Singapore 508914  
Tel: +65 6825-1668

### Brazil

Av. Julia Gaioli, 474 – Bonsucesso  
07251-500 – Guarulhos, Brazil  
Tel: +55 11 2465-8822

## For more information, please



email us at [filtration@eaton.com](mailto:filtration@eaton.com)  
or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)

© 2015 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.



# Series HP 601-1351

## 6000 PSI

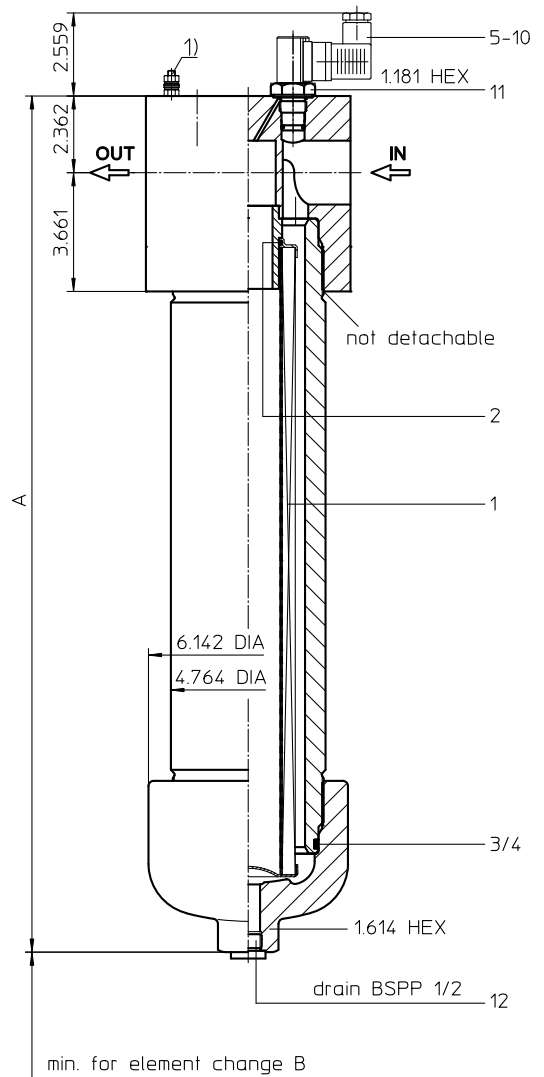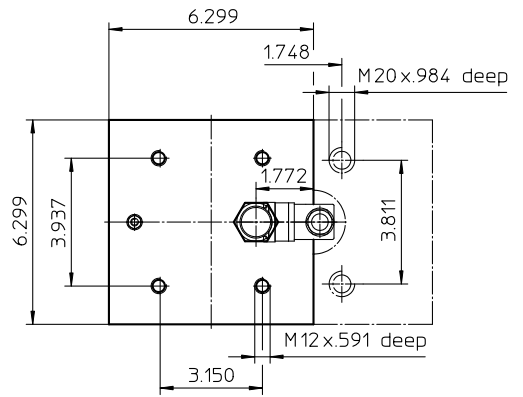

**Dimensions:**

type	HP 601	HP 901	HP 1351
connection	SAE 2"		
A	20.47	26.37	36.14
B	12.20	18.11	27.95
weight	108 lbs.	123 lbs.	150 lbs.
volume tank	0.55 Gal.	0.82 Gal.	1.21 Gal.

1) Connect the stand grounding tab to a suitable earth ground point.



Powering Business Worldwide

Dimensions: inches  
 Designs and performance values are subject to change.

# Pressure Filter

## Series HP 601-1351

### 6000 PSI

#### Description:

Pressure filter series HP 601-1351 have a working pressure up to 6000 PSI. Pressure peaks can be absorbed with a sufficient safety margin. The HP-filter is in-line mounted.

The filter element consists of star-shaped, pleated filter material, which is supported on the inside by a perforated core tube and is bonded to the end caps with a high-quality adhesive. The flow direction is from outside to inside. Filter elements are available down to 4  $\mu\text{m}_{(c)}$ .

Eaton filter elements are known for high intrinsic stability and an excellent filtration capability, a high dirt-retaining capacity and a long service life.

Eaton filter elements are suitable for all petroleum based fluids, HW-emulsions, most synthetic hydraulic fluids and lubrication oils.

Eaton filter elements are available up to a pressure resistance of  $\Delta p$  2320 PSI and a rupture strength of  $\Delta p$  3625 PSI.

The internal valve is integrated into the filter head.

After reaching the bypass pressure setting, the bypass valve will send unfiltered partial flow around the filter.

The reversing valve provides another level of protection for the filter element. The reverse flow will not be filtered.

#### 1. Type index:

##### 1.1. Complete filter: (ordering example)

**HP. 901. 10VG. HR. E. P. - FS. 8. - - AE**

1	2	3	4	5	6	7	8	9	10	11	12
---	---	---	---	---	---	---	---	---	----	----	----

##### 1 series:

HP = pressure filter

##### 2 nominal size: 601, 901, 1351

##### 3 filter-material and filter-fineness:

80G, 40G, 25G, 10G stainless steel wire mesh  
25VG, 16VG, 10VG, 6VG, 3VG microglass

##### 4 filter element collapse rating:

30 =  $\Delta p$  435 PSI  
HR =  $\Delta p$  2320 PSI (rupture strength  $\Delta p$  3625 PSI)

##### 5 filter element design:

E = single-end open

##### 6 sealing material:

P = Nitrile (NBR)  
V = Viton (FPM)

##### 7 filter element specification: (see catalog)

- = standard  
VA = stainless steel  
IS06 = for HFC applications, see sheet-no. 31601

##### 8 process connection:

FS = SAE-flange 6000 PSI

##### 9 process connection size:

8 = 2"

##### 10 filter housing specification: (see catalog)

- = standard  
IS06 = for HFC applications, see sheet-no. 31605

##### 11 internal valve:

- = without  
S1 = with bypass valve  $\Delta p$  51 PSI  
S2 = with bypass valve  $\Delta p$  102 PSI  
R = reversing valve,  $Q \leq 122.94$  GPM

##### 12 clogging indicator or clogging sensor:

- = without  
AOR = visual, see sheet-no. 1606  
AOC = visual, see sheet-no. 1606  
AE = visual-electric, see sheet-no. 1615  
VS5 = electronic, see sheet-no. 1619

To add an indicator to your filter, use the corresponding indicator data sheet to find the indicator details and add them to the filter assembly model code.

##### 1.2. Filter element: (ordering example)

**01E. 900. 10VG. HR. E. P. -**

1	2	3	4	5	6	7
---	---	---	---	---	---	---

##### 1 series:

01E. = filter element according to company standard

##### 2 nominal size: 600, 900, 1350

##### 3 - 7 see type index-complete filter

## Technical data:

design temperature:	14 °F to +212 °F
operating temperature:	14 °F to +176 °F
operating medium:	mineral oil, other media on request
max. operating pressure:	6000 PSI
test pressure:	8580 PSI
process connection:	SAE-flange 6000 PSI
housing material:	C-steel
sealing material:	Nitrile (NBR) or Viton (FPM), other materials on request
installation position:	vertical

Classified under the Pressure Equipment Directive 2014/68/EC for mineral oil (fluid group 2), Article 4, Para. 3.  
 Classified under ATEX Directive 2014/34/EC according to specific application (see questionnaire sheet-no. 34279-4).

## Pressure drop flow curves:

### Filter calculation/sizing

The pressure drop of the assembly at a given flow rate Q is the sum of the housing  $\Delta p$  and the element  $\Delta p$  and is calculated as follows:

$$\Delta p_{assembly} = \Delta p_{housing} + \Delta p_{element}$$

$$\Delta p_{housing} = (\text{see } \Delta p = f(Q) \text{ - characteristics})$$

$$\Delta p_{element} (PSI) = Q (GPM) \times \frac{MSK}{1000} \left( \frac{PSI}{GPM} \right) \times \nu (SUS) \times \frac{\rho}{0.876} \left( \frac{kg}{dm^3} \right)$$

For ease of calculation our Filter Selection tool is available online at [www.eatonpowersource.com/calculators/filtration/](http://www.eatonpowersource.com/calculators/filtration/)


### Material gradient coefficients (MSK) for filter elements

The material gradient coefficients in PSI/GPM apply to mineral oil (HLP) with a density of 0.876 kg/dm<sup>3</sup> and a kinematic viscosity of 139 SUS (30 mm<sup>2</sup>/s). The pressure drop changes proportionally to the change in kinematic viscosity and density.


HP	VG					G		
	3VG	6VG	10VG	16VG	25VG	25G	40G	80G
601	2.714	1.884	1.206	1.036	0.708	0.0839	0.0783	0.0537
901	2.092	1.452	0.930	0.799	0.546	0.0651	0.0607	0.0416
1351	1.530	1.062	0.680	0.584	0.399	0.0475	0.0444	0.0304

### $\Delta p = f(Q)$ – characteristics according to ISO 3968

The pressure drop characteristics apply to mineral oil (HLP) with a density of 0.876 kg/dm<sup>3</sup>. The pressure drop changes proportionally to the density.

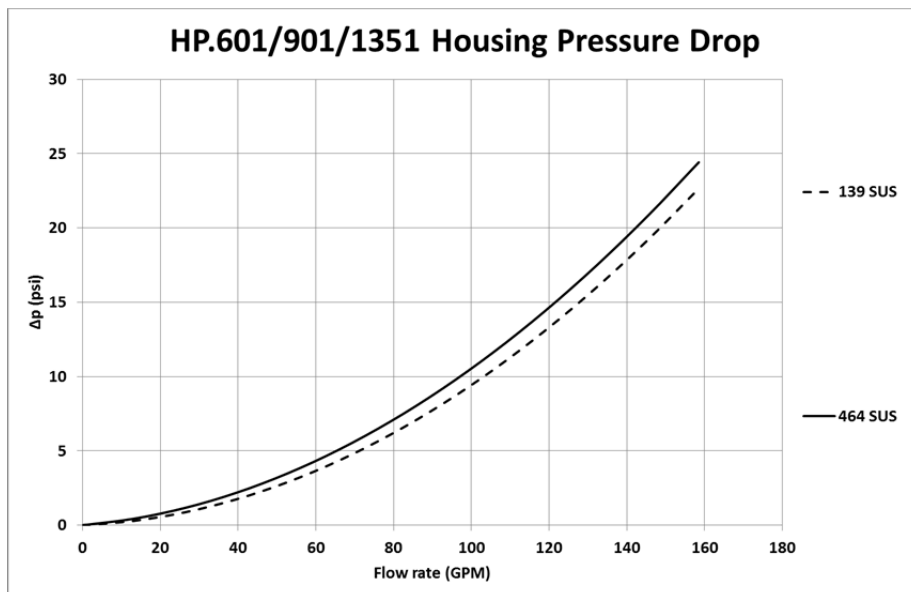

## Symbols:

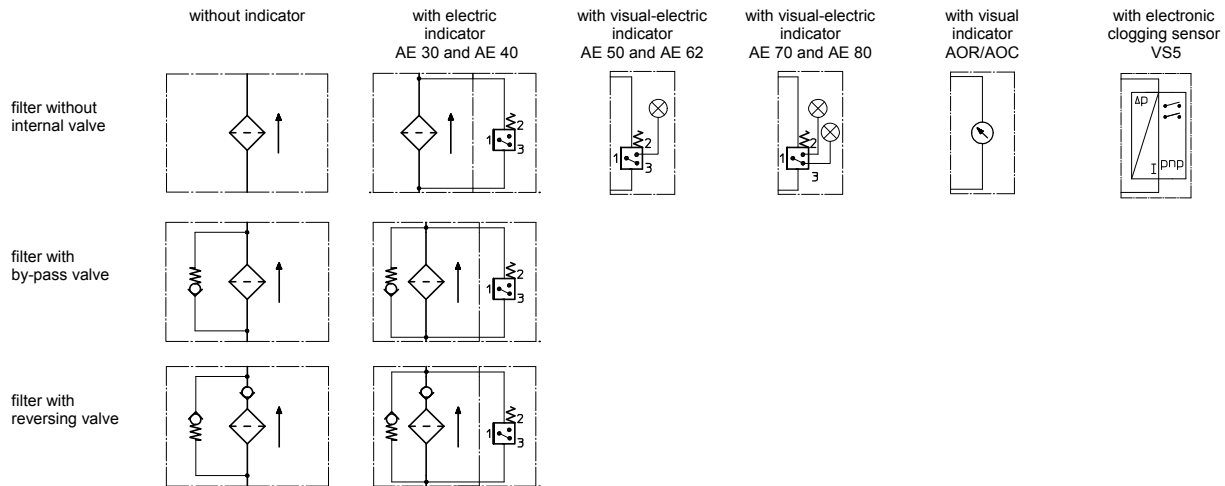

## Spare parts:

item	qty.	designation	dimension			article-no.	
			HP 601	HP 901	HP 1351		
1	1	filter element	01E.600...	01E.900...	01E.1350...		
2	1	O-ring		48 x 3		304357 (NBR)	304404 (FPM)
3	1	O-ring		98 x 4		301914 (NBR)	304765 (FPM)
4	1	support ring		110 x 3,5 x 2			304802
5	1	clogging indicator, visual		AOR or AOC			see sheet no. 1606
6	1	clogging indicator, visual-electric		AE			see sheet no. 1615
7	1	clogging sensor, electronic		VS5			see sheet no. 1619
8	1	O-ring		15 x 1,5		315357 (NBR)	315427 (FPM)
9	1	O-ring		22 x 2		304708 (NBR)	304721 (FPM)
10	1	O-ring		14 x 2		304342 (NBR)	304722 (FPM)
11	1	screw plug		20913-4			309817
12	1	screw plug		G ½			304678

item 11 execution only without clogging indicator or clogging sensor

## Test methods:

Filter elements are tested according to the following ISO standards:

ISO 2941	Verification of collapse/burst resistance
ISO 2942	Verification of fabrication integrity
ISO 2943	Verification of material compatibility with fluids
ISO 3723	Method for end load test
ISO 3724	Verification of flow fatigue characteristics
ISO 3968	Evaluation of pressure drop versus flow characteristics
ISO 16889	Multi-pass method for evaluating filtration performance

### North America

44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

### Europe/Africa/Middle East

Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0

Friedensstraße 41  
68804 Altluisheim, Germany  
Tel: +49 6205 2094-0

An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

### China

No. 3, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

### Singapore

4 Loyang Lane #04-01/02  
Singapore 508914  
Tel: +65 6825-1668

### Brazil

Av. Julia Caioli, 474 – Bonsucesso  
07251-500 – Guarulhos, Brazil  
Tel: +55 11 2465-8822

## For more information, please

email us at [filtration@eaton.com](mailto:filtration@eaton.com)

or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)

© 2015 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.