


HVC10

HVC10 SERIES DIRECTIONAL VALVES LINE MOUNTING

SYMBOL

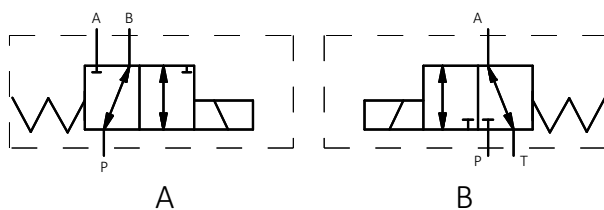


 Technical data

Model	HVC10
(L/min) Max .flow rate(L/min)	80
(Mpa) Max operating pressure(MPa)	25
Valve body (Material) Surface treatment	(casting) phosphating surface
Oil cleanliness	NAS1638 class 9 and ISO4406 class 20/18/15

▶ Characteristic curves (measured with HLP46, Voil=40 °C ± 5 °C)


$\Delta p-q_v$ Characteristic curves

1=P1-A;B-P2 2=P1-C;D-P2

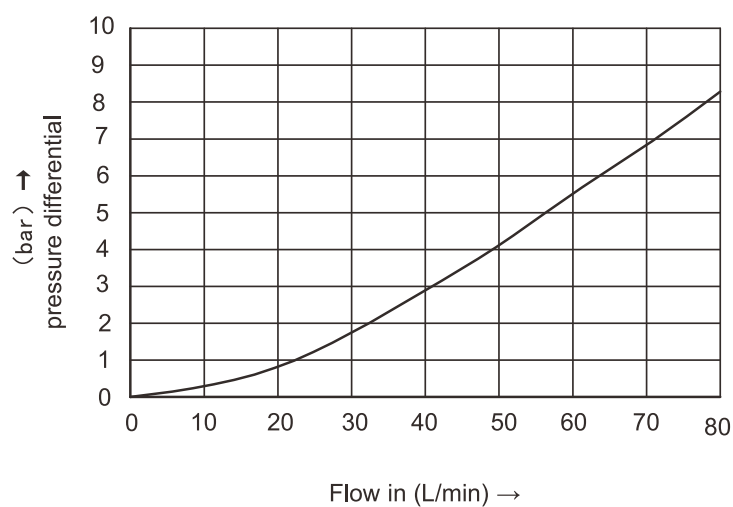


Installation Dimensions

HVC10A

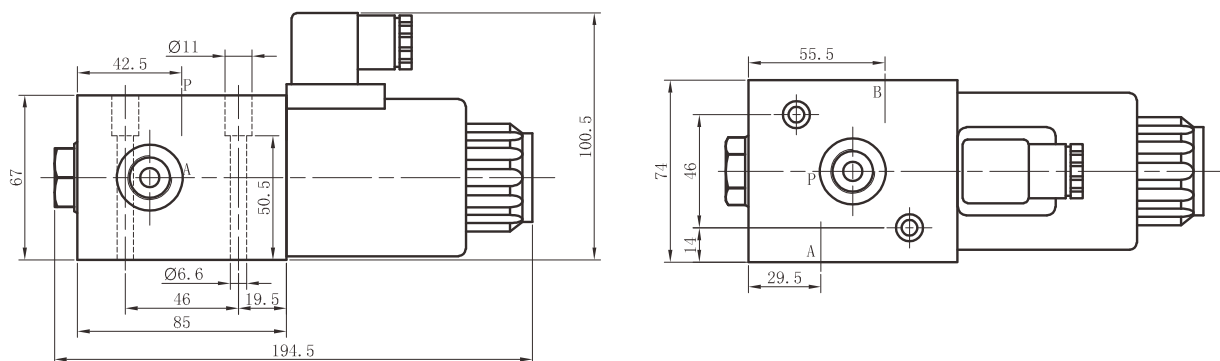

HVC10B

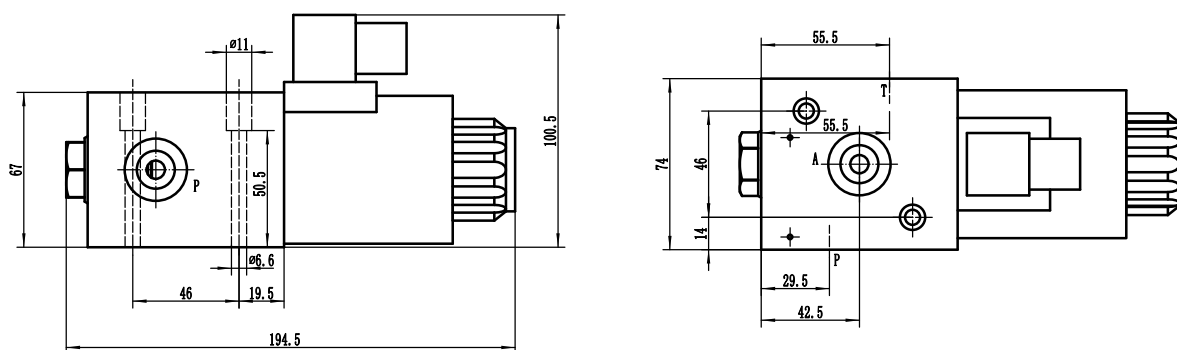

Ordering Details

