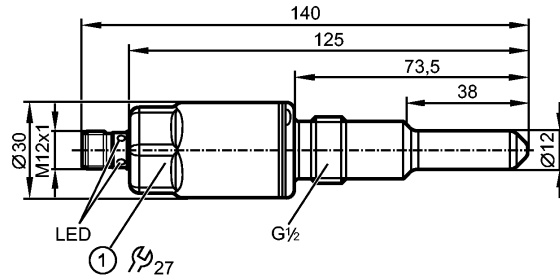


LMT102

LMCCE-A12E-QSKG-2/US

Level sensors



1: tightening torque 20...25 Nm

    **EC 1935/2004 EHEDG Certified**

Product characteristics

Electronic level sensor
Quick disconnect
Process connection: G 1/2 A
gold-plated contacts
Probe length: 38 mm
Communication interface: IO-Link 1.1
2 switching outputs

Application

Application	liquid, viscous and powdery media
Recommended media	water, water-based media, oils, oil-based media, powdery media
Cannot be used for:	See the operating instructions, chapter "Function and features".

Medium temperature oil

- Continuous [°C]	-20...100
- Short time [°C]	-20...150 (1 h)

Medium temperature water and hydrous media

- Continuous [°C]	-20...85
- Short time [°C]	-20...150 (1 h)

Electrical data

Electrical design	DC PNP/NPN
Operating voltage [V]	18...30 DC
Current consumption [mA]	< 50
Protection class	III
Reverse polarity protection	yes

Outputs

Output	2 switching outputs
Output function	2 x normally open / closed programmable
Current rating [mA]	100
Voltage drop [V]	< 2.5
Short-circuit protection	yes (non-latching)
Overload protection	yes


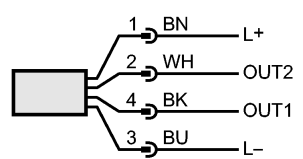
Measuring / setting range

Factory setting	water-based media
-----------------	-------------------

LMT102

LMCCE-A12E-QSKG-2/US

Level sensors

Interfaces	
IO-Link Device	
Transfer type	COM2 (38.4 kBaud)
IO-Link revision	1.1
SDCI standard	IEC 61131-9
IO-Link Device ID	0x000172
Profiles	Smart Sensor: Process Data Variable; Device Identification
SIO mode	yes
Required master port class	A
Process data analogue	1
Process data binary	2
Min. process cycle time [ms]	2.3
Environment	
Ambient temperature [°C]	-20...85, at max. 100 °C medium temperature (-20...60 °C at max. 150 °C medium temperature)
Storage temperature [°C]	-40...85
Maximum vessel pressure [bar]	-1...40 *)
Protection	IP 68 / IP 69K
Tests / approvals	
EMC	DIN EN 61000-6-2 DIN EN 61000-6-4 : open tanks DIN EN 61000-6-3 : closed tanks
Shock resistance	DIN EN 60068-2-27 50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6 20 g (10...2000 Hz)
MTTF [Years]	223
UL approval number	H001
Mechanical data	
Process connection	G ½ A
Materials (wetted parts)	PEEK; surface characteristics: Ra < 0.8
Housing materials	stainless steel (316L / 1.4404); PEEK; PEI; FKM
Weight [kg]	0.238
Displays / operating elements	
Display	Switching status LEDs yellow operating status LEDs green
Electrical connection	
Connection	M12 connector; gold-plated contacts
Wiring	
Core colors	
BK black	
BN brown	
BU blue	
WH white	
	
	OUT1: Switching output / IO-Link / Teach OUT2: Switching output Colours to DIN EN 60947-5-2

**LMT102**

LMCCE-A12E-QSKG-2/US

Level sensors**Remarks**

Remarks	*) MAWP (for applications according to CRN): 40 bar (4 MPa)
Pack quantity [piece]	1