



SAE cavity cartridges




MC10X - MC10X-HF type pressure relief valve - 2 ways

- Solenoid proportional type, direct acting
- Poppet type

Technical specifications and diagrams are measured with mineral oil of 46 cSt viscosity at 40°C (104°F) temperature.

		MC10X	MC10X-HF
Max. flow		3 l/min (0.79 US gpm)	10 l/min (2.64 US gpm)
Max. pressure		350 bar (5100 psi)	250 bar (3600 psi)
Oil leakage	80% of max. pressure setting	0.25 cm ³ /min (0.015 in ³ /min)	0.5 cm ³ /min (0.030 in ³ /min)
Fluid		mineral based oil	
Viscosity		10-200 cSt	
Max level of contamination		18/16/13 ISO4406	
Fluid temperature	with NBR seals with FPM seals	from -20°C (-4°F) to 80°C (176°F) from -20°C (-4°F) to 100°C (212°F)	
Environmental temp. for working conditions		from -40°C (-40°F) to 100°C (212°F)	
Cavity		SAE 10/2	
Coil type*		BH or BQP19	BQP19
Nominal voltages		12 VDC - 24 VDC	
Power rating		20.4 W (BH) - 15 W (BQP19)	15 W
Max. control current		12 V -> 1.70 A - 24 V -> 0.85 A (BH) 12 V -> 1.25 A - 24 V -> 0.63 A (BQP19)	12 V -> 1.25 A - 24 V -> 0.63 A
Dither frequency		150 Hz	
Hysteresis		<5%	
Weight		0.760 kg (1.67 lb)	0.863 kg (1.90 lb)


NOTE - For different conditions, please contact Walvoil Sales Dpt. - For coils further features see from page 190.

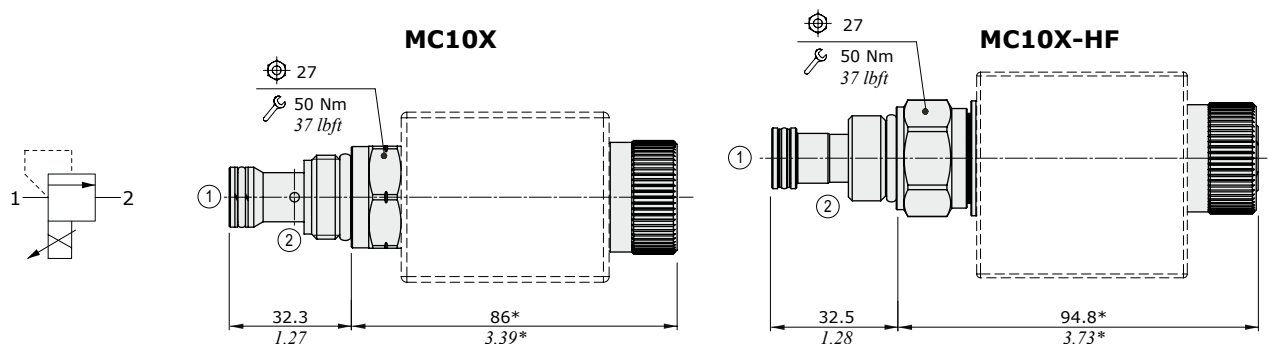



NOTE (*): dimension for configuration without override, for dimensions with different type of emergency see page 197.

Ordering codes and description composition

MC10X/001B



MC10X/031B

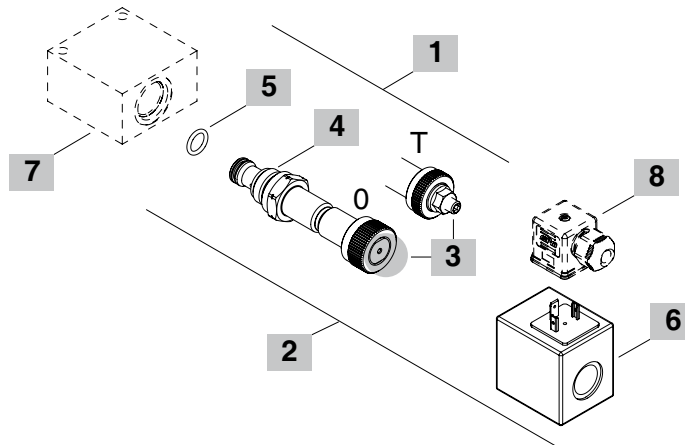

1 Cartridges

TYPE	CODE	DESCRIPTION
MC10X/001B	0MC10002050	Pressure range 1
MC10X/002B	0MC10002051	Pressure range 2
MC10X/003B	0MC10002052	Pressure range 3
MC10X-HF/003B	0MC10002064	Pressure range 3
MC10X-HF/T03B	0MC10002063	Pressure range 3

2 Complete cartridges with coil

TYPE	CODE	DESCRIPTION
<i>Note: not for MC10X-HF</i>		
MC10X/031B	0MC10002039	Pressure range 1 , 12VDC
MC10X/032B	0MC10002040	Pressure range 2 , 12VDC
MC10X/033B	0MC10002041	Pressure range 3 , 12VDC

3 Emergency

TYPE	DESCRIPTION
0	Without override
T	With screw

4 Pressure range

TYPE	DESCRIPTION
MC10X	
1	Pressure range 7÷120 bar (102÷1740 psi)
2	Pressure range 7÷170 bar (102÷2450 psi)
3	Pressure range 7÷210 bar (102÷3050 psi)
MC10X-HF	
3	Pressure range 3÷230 bar (43÷3330 psi)

Note: for further pressure range contact Sales Dept.

5 Seals

TYPE	DESCRIPTION
B	NBR (Buna) o-ring seals, std configuration
V	FPM (Viton) o-ring seals, contact Sales Dept.

6 Coil

TYPE	CODE	DESCRIPTION
2) BH 12VDC	4SLD001200	12VDC-ISO4400 coil
3) BQP19 12VDC	4SL5000126	12VDC-ISO4400 coil
4) BH 24VDC	4SLD002400	24VDC-ISO4400 coil
5) BQP19 24VDC	4SL5000245	24VDC-ISO4400 coil

Note: for HF version use only BQP19 coil
 For complete coils list see from page 190

7 Valve body

TYPE	CODE	DESCRIPTION
SAE 10/2-G 3/8	3CC1020C11	Aluminium body for cavity 10 valve, G 3/8 std thread


Note: aluminium body can stand up to 210 bar (3050 psi)
 For steel bodies or different threading see from page 199

8 Connector


TYPE	CODE	DESCRIPTION
ISO4400	4CN1009995	Connector

For complete connectors list see from page 190


MC10X pressure setting vs. % max. control current
at 1 l/min (0.26 US gpm)

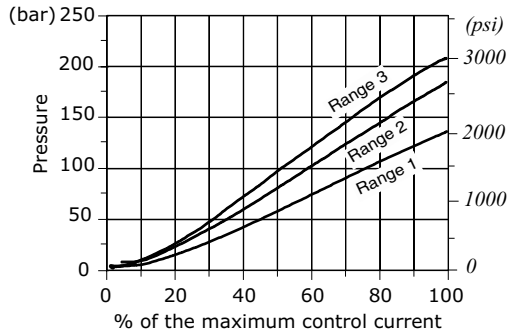


MC10X-HF pressure setting vs. % max. control current
at 2 l/min (0.53 US gpm)

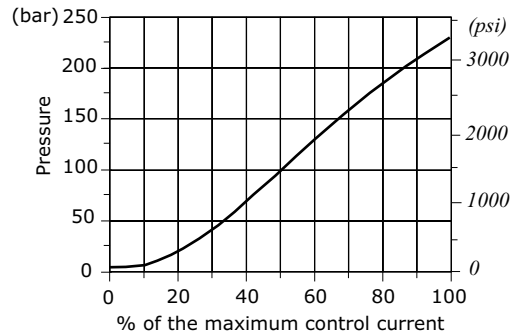


MC10X pressure vs. flow 1->2
for % of control current - Pressure range 1 -

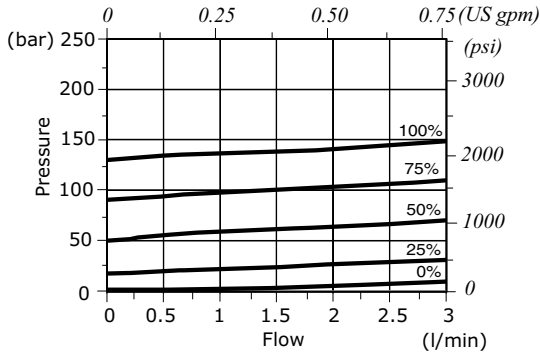


MC10X-HF pressure vs. flow 1->2
for % of control current

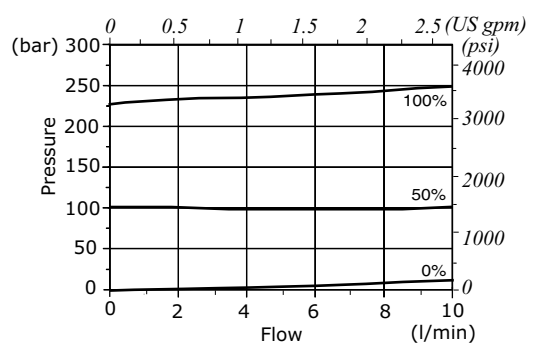

MC10X pressure vs. flow 1->2
for % of control current - Pressure range 2 -

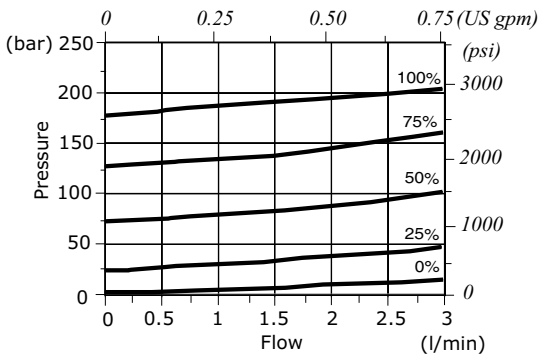

MC10X pressure vs. flow 1->2
for % of control current - Pressure range 3 -

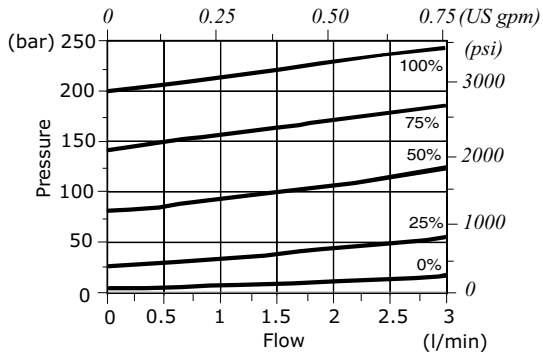

Types and ordering codes

Valve type	Coil	Voltage	Connector					
			ISO4400	Deutsch DT	AMP JPT	Packard Weather-pack	Packard Metri-pack	Flying leads
Directional solenoid valves								
EA08A	BE	12 VDC	4SL1000120	4SL1000123 ⁽⁶⁾ 4SL1000140 ⁽³⁻⁶⁾ 4SL1000124 ⁽²⁾	-	-	-	4SL1000122
		24 VDC	4SL1000240 4SL1030240 ⁽¹⁾	4SL1002401 ⁽⁶⁾	-	-	-	-
		110 VDC	4SL1011100 4SL1031100 ⁽¹⁾	-	-	-	-	-
		220 VDC	4SL1012200 4SL1032200 ⁽¹⁾	-	-	-	-	-
EA08B EW08A EJ08F EJ08G	BT	10 VDC	4SL3000100	-	-	-	-	-
		12 VDC	4SL3000120 4SL3000126 ⁽⁴⁾	4SL3000130 ⁽⁶⁾ 4SL3000134 ⁽³⁻⁶⁾ 4SL3000128 ⁽²⁾	4SL3000122 ⁽⁵⁾ 4SL3001200 ⁽³⁻⁵⁾	4SL3000124 ⁽²⁾	4SL3000127 ⁽²⁾	4SL300012C
		24 VDC	4SL3000240 4SL3030240 ⁽¹⁾	4SL3000249 ⁽⁶⁾ 4SL300024C ⁽³⁻⁶⁾	4SL3000248 ⁽⁵⁾	-	-	4SL3000246
		26 VDC	4SL3000260	-	-	-	-	-
		48 VDC	4SL3000480 4SL3030480 ⁽¹⁾	-	-	-	-	-
		110 VDC	4SL3001100 4SL3031100 ⁽¹⁾	-	-	-	-	-
		220 VDC	4SL3002200 4SL3032200 ⁽¹⁾	-	-	-	-	-
EW10M	BH	12 VDC	4SLD001200	4SLD001201 ⁽⁶⁾	4SLD001202 ⁽⁵⁾	-	-	4SLD001203
		24 VDC	4SLD002400	4SLD002401 ⁽⁶⁾	4SLD002402 ⁽⁵⁾	-	-	4SLD002403
		10 VDC	4SLE001000	-	-	-	-	-
EE08A EC..M EF..M EJ08M ER08M ET08M	BER	12 VDC	4SLE001200 4SLE001217 ⁽³⁾	4SLE001201 ⁽⁵⁾ 4SLE001209 ⁽³⁻⁵⁾ 4SLE001202 ⁽⁶⁾ 4SLE001216 ⁽³⁻⁶⁾ 4SLE001206 ⁽²⁾	4SLE001203 ⁽⁵⁾ 4SLE001211 ⁽³⁻⁵⁾	4SLE001210 ⁽²⁾	4SLE001214 ⁽²⁾	4SLE001207
		24 VDC	4SLE002400 4SLE002408 ⁽³⁾ 4SLE302400 ⁽¹⁾	4SLE002401 ⁽⁵⁾ 4SLE002407 ⁽³⁻⁵⁾ 4SLE002402 ⁽⁶⁾	4SLE002403 ⁽⁵⁾	-	-	4SLE002404
		48 VDC	4SLE004800 4SLE304800 ⁽¹⁾	-	-	-	-	-
		110 VDC	4SLE011000 4SLE311000 ⁽¹⁾	-	-	-	-	-
		220 VDC	4SLE022000 4SLE322000 ⁽¹⁾	-	-	-	-	-
EE10A EW10A EW10B	BIN19	10.5 VDC	4SL6000100	-	-	-	-	-
		12 VDC	4SL6000121	-	-	-	-	-
		24 VDC	4SL6000240	-	-	-	-	-
EE12A EW12A EW12C EJ12A ET12A	BIN22	12 VDC	4SL6000128	-	-	-	-	-
		24 VDC	4SL6000245	-	-	-	-	-
EJ10M EL08A ER10M ET10M	BC	10.5 VDC	4SL8000110	-	-	-	-	-
		12 VDC	4SL8000120	4SL800012B ⁽⁶⁾	4SL8000127 ⁽⁵⁾ 4SL8000130 ⁽⁵⁻³⁾	-	-	4SL800012A
		24 VDC	4SL8000240 4SL8030240 ⁽¹⁾	4SL8000243 ⁽⁶⁾	4SL8000241 ⁽⁵⁾	-	-	4SL8000242
		26 VDC	4SL8000260	-	-	-	-	-
		48 VDC	4SL8030480 ⁽¹⁾	-	-	-	-	-
		110 VDC	4SL8031100 ⁽¹⁾	-	-	-	-	-
EL10C	BQ16	12 VDC	4SL8000121	4SL8000128 ⁽⁵⁾	-	-	4SL8000124 ⁽²⁾	4SL8000125
		24 VDC	4SL8002400	4SL8000245 ⁽⁵⁾	-	-	-	-

Types and ordering codes


Valve type	Coil	Voltage	Connector					
			ISO4400	Deutsch DT	AMP JPT	Packard Weather-pack	Packard Metri-pack	Flying leads
Pressure relief valves - Pressure reducing valves - Flow control pressure compensated valves								
MC08Y MP16Y RD08W RM..W RP..W	MP35	12 VDC	4SL4000120	-	-	-	-	-
		24 VDC	4SL4000240	-	-	-	-	-
MC10X MP..T MP..X PP..X PU..X	BQP19	12 VDC	4SL5000126	4SL5000125 ⁽⁶⁾	4SL5000129 ⁽⁵⁾	-	-	-
		24 VDC	4SL5000245	4SL5000244 ⁽⁶⁾	4SL5000248 ⁽⁵⁾	-	-	-
	BH	12 VDC	4SLD001200	4SLD001201 ⁽⁶⁾	4SLD001202 ⁽⁵⁾	-	-	4SLD001203
		24 VDC	4SLD002400	4SLD002401 ⁽⁶⁾	4SLD002402 ⁽⁵⁾	-	-	4SLD002403
RD08S RD08T	MSM19	12 VDC	4SL5000128	-	-	-	5SL5000122 ⁽²⁾	4SL5000122
		24 VDC	4SL5000247	-	-	-	5SL5000243 ⁽²⁾	4SL5000243
RP08X	BDP19	12 VDC	4SL5000120	-	-	-	-	-
		24 VDC	4SL5000240	-	-	-	-	-
Connettori di accoppiamento (con raddrizzatore vedere tabella seguente)			4CN1009995	5CON140031	5CON003	5CON001	5CON017	-

Notes: ⁽¹⁾ supply with AC and use only with rectifier connector - ⁽²⁾ with flying leads - ⁽³⁾ with bidirectional diode - ⁽⁵⁾ with unidirectional diode - ⁽⁵⁾ integrated perpendicular type - ⁽⁶⁾ integrated parallel type

Voltage	ISO 4400 mating connector with rectifier			
	BT type coil	BE type coil	BER type coil	BC type coil
24 VDC	4CN3010240	4CN1010240	4CN1010240	4CN3010240
48 VDC	4CN3010480	4CN1010480	4CN1010480	4CN3010480
110 VDC	4CN3011100	4CN1011100	4CN1011100	4CN3011100
220 VDC	4CN3012200	4CN1012200	4CN1012200	4CN3012200

Dimensional data and features

BE type

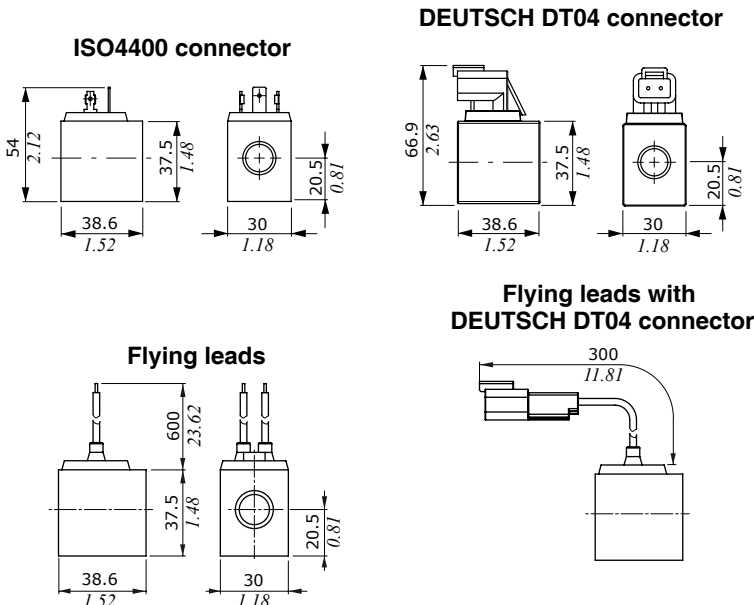


Features

- Nominal voltage tolerance : $\pm 10\%$
- Power rating : 18.7 W - 12 VDC
- : 18.6 W - 24 VDC
- : 17.3 W - 110 VDC
- : 15.7 W - 220 VDC
- : 18.3 W - 24 RAC
- : 16 W - 110 RAC
- : 16 W - 220 RAC
- Max. operating current . . . : 1.56 A - 12 VDC
- : 0.77 A - 24 VDC
- : 0.157 A - 110 VDC
- : 0.08 A - 220 VDC
- : 0.85 A - 24 RAC
- : 0.16 A - 110 RAC
- : 0.08 A - 220 RAC
- Coil insulation : Class F (155°C - 311°F)
- Weather protection : IP65 - ISO4400
- : IP69K - Deutsch DT
- Insertion : 100%

Dimensional data and features


BT type

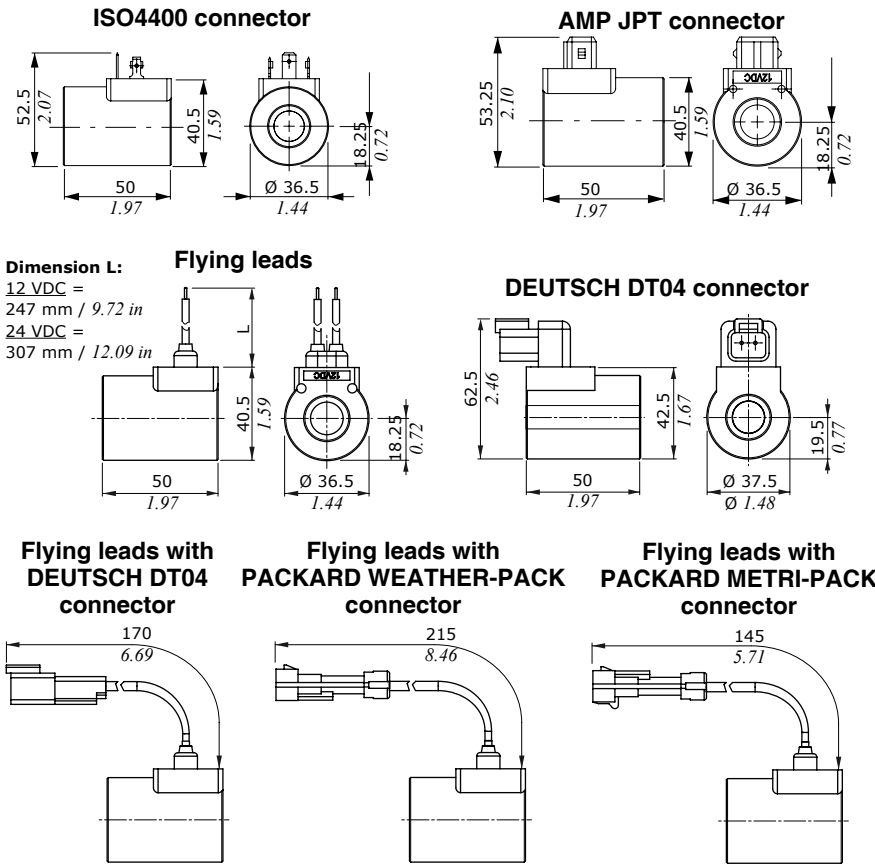

Features

Nominal voltage tolerance	: ±10%
Power rating	: 19 W - 10 VDC
	: 21 W - 12/24/26 VDC
	: 20.3 W - 48 VDC
	: 17.3 W - 110 VDC
	: 17.7 W - 220 VDC
	: 19.9 W - 24 RAC
	: 20.7 W - 48 RAC
	: 20 W - 110 / 220 RAC
Max. operating current	: 1.9 A - 10 VDC
	: 1.77 A - 12 VDC
	: 0.89 A - 24VDC
	: 0.84 A - 26 VDC
	: 0.43 A - 48 VDC
	: 0.16 A - 110 VDC
	: 0.08 A - 220 VDC
	: 0.93 A - 24 RAC
	: 0.47 A - 48 RAC
	: 0.18 A - 110 RAC
	: 0.09 A - 220 RAC
Coil insulation	: Class F (155°C - 311°F)
Weather protection	: IP65 - ISO4400
	: IP69K - Deutsch DT
	: IP65 - AMP JPT
	: IP67 - Weatherpack
	: IP67 - Metri-pack
Insertion	: 100%

BH type

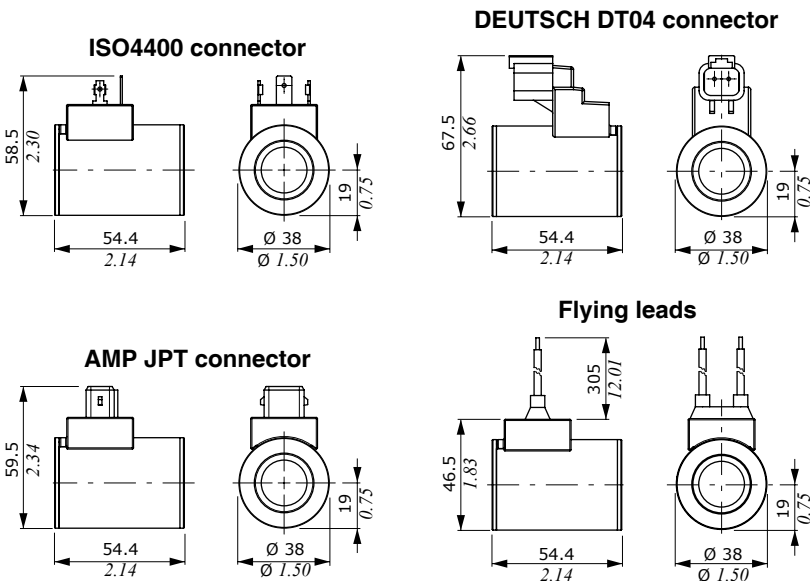


Features

Nominal voltage tolerance	: ±10%
Power rating	: 33 W - 12/24 VDC
Max. oper. current (on/off)	: 2.75 A - 12 VDC
	: 1.38 A - 24 VDC
Max. prop. control current	: 1.7 A - 12 VDC
	: 0.85 A - 24 VDC
Coil insulation	: Class H (180°C - 356°F)
Weather protection	: IP65 - ISO4400
	: IP69K -Deutsch DT
	: IP65 - AMP JPT
Insertion	: 100%


Dimensional data and features

BER type

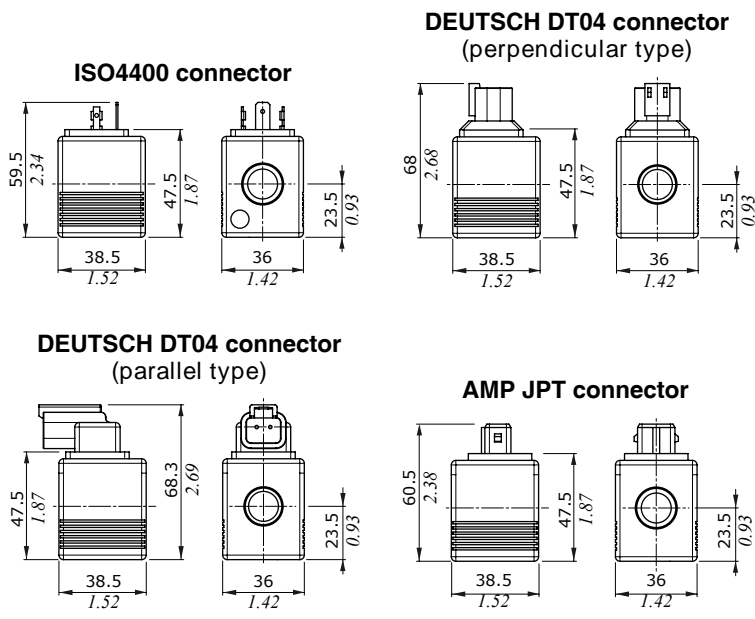


Features


- Nominal voltage tolerance : ±10%
- Power rating : 19.2 W - 10/12/24/48/
110/220 VDC
: 19 W - 24/110/220 RAC
: 19.2 W - 48 RAC
- Max. operating current . . . : 1.9 A - 10 VDC
: 1.61 A - 12 VDC
: 0.80 A - 24 VDC
: 0.40 A - 48 VDC
: 0.17 A - 110 VDC
: 0.09 A - 220 VDC
: 0.89 A - 24 RAC
: 0.45 A - 48 RAC
: 0.19 A - 110 RAC
: 0.09 A - 220 RAC
- Coil insulation : Class H (180°C - 356°F)
- Weather protection : IP65 - ISO4400
: IP69K - Deutsch DT
: IP65 - AMP JPT
: IP67 - Weatherpack
: IP67 - Metri-pack
- Insertion : 100%

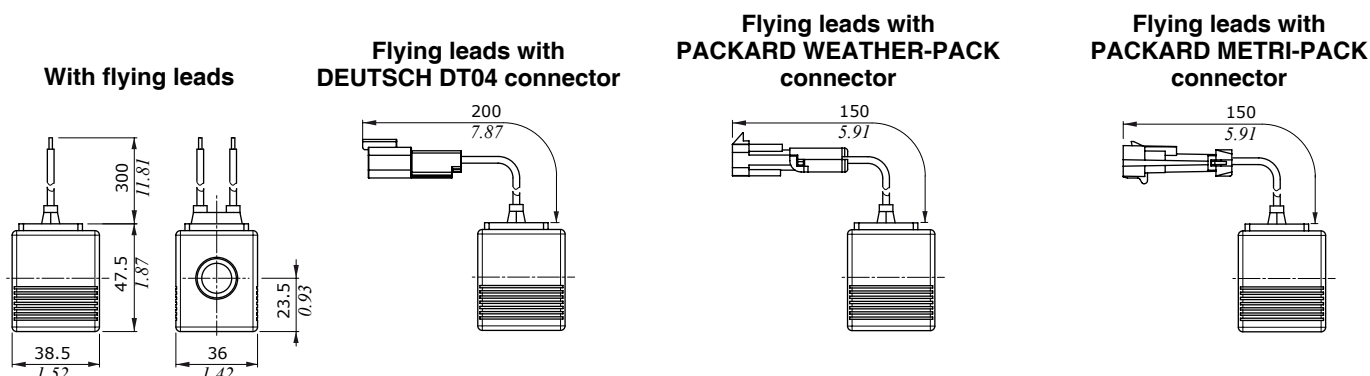

BIN19 type

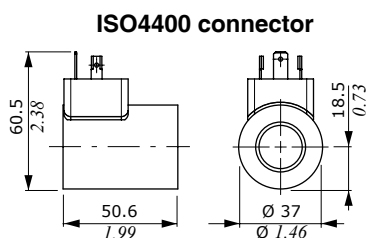

BIN22 type

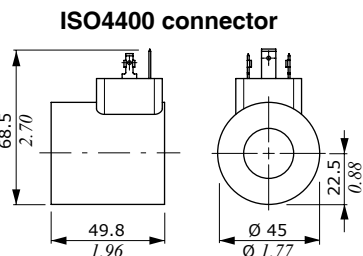


Features

- Nominal voltage tolerance : ±10%
- Coil insulation : Class F (155°C - 311°F)
- Weather protection : IP65 - ISO4400
- Insertion : 100%
- BIN19**
- Power rating : 26 W - 10.5 VDC
: 29 W - 12 VDC
: 31 W - 24 VDC
- Max. operating current . . . : 2.48 A - 10.5 VDC
: 2.41 A - 12 VDC
: 1.29 A - 24 VDC
- BIN22**
- Power rating : 32.6 W - 12 VDC
: 31 W - 24 VDC
- Max. operating current . . . : 2.72 A - 12 VDC
: 1.29 A - 24 VDC


Dimensional data and features

BC type


ISO4400 connector

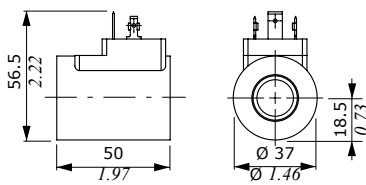


DEUTSCH DT04 connector

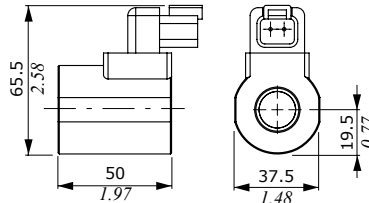

Flying leads

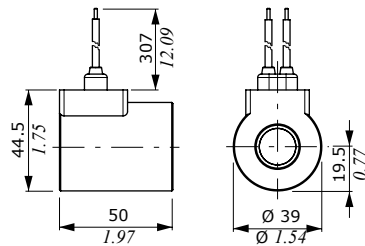

AMP JPT connector

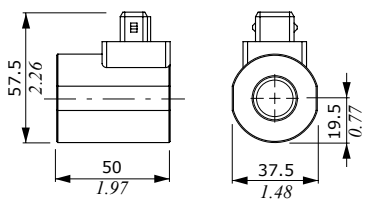


Features


- Nominal voltage tolerance : $\pm 10\%$
- Power rating : 26.9 W - 10.5 VDC
: 26.2 W - 12 VDC
: 25.9 W - 24 VDC
: 24 W - 26 VDC
: 26 W - 24/48/110/220 RAC
- Max. operating current . . . : 2.6 A - 10.5 VDC
: 2.19 A - 12 VDC
: 1.08 A - 24 VDC
: 0.92 A - 26 VDC
: 1.2 A - 24 RAC
: 0.6 A - 48 RAC
: 0.3 A - 110 RAC
: 0.15 A - 220 RAC
- Coil insulation : Class H (180°C - 356°F)
- Weather protection : IP65 - ISO4400
: IP65 - AMP JPT
: IP69K - Deutsch DT
- Insertion : 100%

BQ16 type

ISO4400 connector


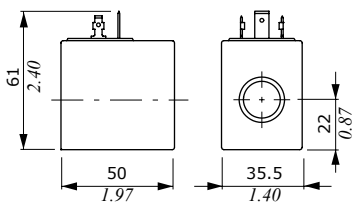


DEUTSCH DT04 connector

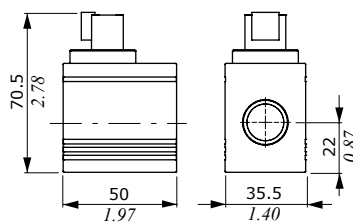

Flying leads with

PACKARD METRI-PACK connector

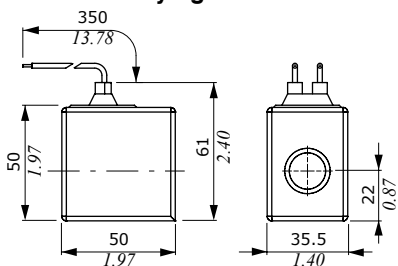


Features

- Nominal voltage tolerance : $\pm 10\%$
- Power rating : 30 W - 12/24 VDC
- Max. operating current . . . : 2.5 A - 12 VDC
: 1.25 A - 24 VDC
- Coil insulation : Class H (180°C - 356°F)
- Weather protection : IP65 - ISO4400
: IP69K - Deutsch DT
: IP67 - Metri-pack
- Insertion : 100%

MP35 type

ISO4400 connector

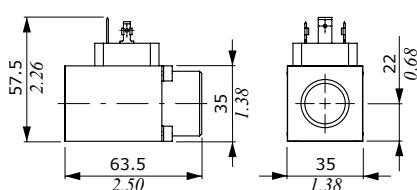


Features

- Nominal voltage tolerance : $\pm 10\%$
- Power rating : 11.2 W - 12 VDC
: 11.4 W - 24 VDC
- Max. prop. control current : 1.25 A - 12 VDC
: 0.68 A - 24 VDC
- Coil insulation : Class F (155°C - 311°F)
- Weather protection : IP65 - ISO4400
- Insertion : 100%


Dimensional data and features

BQP19 type

ISO4400 connector

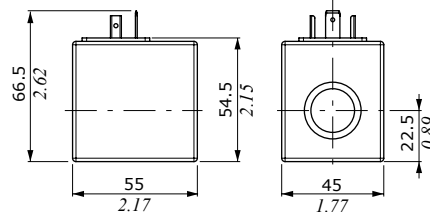


DEUTSCH DT04 connector

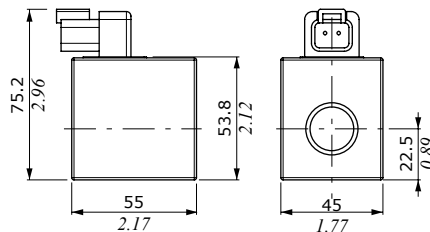

Features


- Nominal voltage tolerance : ±10%
- Power rating : 15 W - 12/24 VDC
- Max. prop. control current : 1.25 A - 12 VDC
- : 0.63 A - 24 VDC
- Coil insulation : Class H (180°C - 356°F)
- Weather protection : IP65 - ISO4400
- : IP69K - Deutsch DT
- : IP65 - AMP JPT
- Insertion : 100%

AMP JPT connector

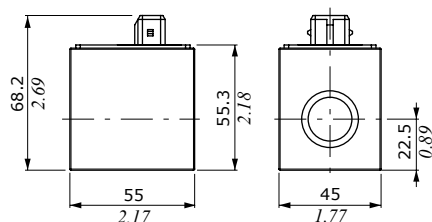


MSM19 type

ISO4400 connector




Flying leads

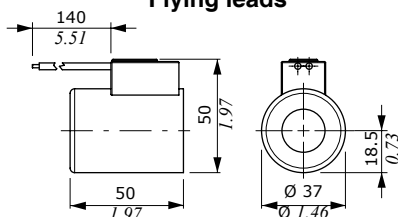

Features


- Nominal voltage tolerance : ±10%
- Max. prop. control current : 1.8 A - 12 VDC
- : 0.9 A - 24 VDC
- Coil insulation : Class F (155°C - 311°F)
- Weather protection : IP65 - ISO4400
- : IP69K - Deutsch DT
- : IP67 - Metri-Pack
- Insertion : 100%

**Flying leads with
PACKARD METRI-PACK connector**

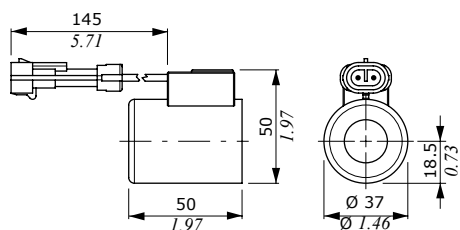

BDP19 type

ISO4400 connector

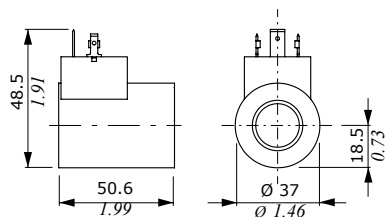


Features

- Nominal voltage tolerance : ±10%
- Power rating : 13 W - 12 VDC
- : 13.25 W - 24 VDC
- Max. prop. control current : 1.9 A - 12 VDC
- : 0.91 A - 24 VDC
- Coil insulation : Class F (155°C - 311°F)
- Weather protection : IP65 - ISO4400
- Insertion : 100%


Adjustments

Types and dimensions

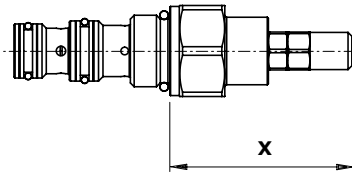

Valve type	Cavity	Dimension "X"					
		M Handknob		S screw		V handwheel	
		mm	in	mm	in	mm	in
MC..A	08/2	-	-	53.5	2.11	77	3.03
	10/2	-	-	94.5	3.72	118	4.65
	12/2	-	-	126.5	4.98	150	5.91
MG..A	10/2	-	-	94.5	3.72	118	4.65
	12/2	-	-	126.5	4.98	150	5.91
MP..A	10/2	-	-	54.5	2.15	77.5	3.05
	12/2	-	-	52.5	2.07	75.5	2.97
RB..A	08/3	-	-	79.5	3.13	103	4.05
	10/3	-	-	94.5	3.72	118	4.65
RD..A	08/3	-	-	79.5	3.13	103	4.05
	10/3	-	-	94.5	3.72	118	4.65
	10/3	-	-	54.5	2.15	66	2.60
RM..A	12/3	-	-	51.5	2.03	63	2.48
	16/3	-	-	50.5	1.99	62	2.44
RP..A	10/3	-	-	54.5	2.15	66	2.60
	12/3	-	-	51.5	2.03	63	2.48
	16/3	-	-	50.5	1.99	62	2.44
	08/2	52	2.05	49.5	1.95	-	-
NB..A	10/2	48	1.89	46.5	1.83	-	-
	12/2	49.2	1.94	46.3	1.82	-	-
	16/2	68.8	2.71	-	-	-	-

Valve type	Cavity	Dimension "X"					
		M Handknob		S screw		V handwheel	
		mm	in	mm	in	mm	in
NT..A	08/2	67.5	2.66	64.5	2.54	-	-
	10/2	68	2.68	65	2.56	-	-
	12/2	69	2.72	66	2.60	-	-
	16/2	68.9	2.71	-	-	-	-
NU..A	08/2	66.5	2.62	64.5	2.54	-	-
	10/2	68	2.68	65	2.56	-	-
	12/2	69	2.72	66	2.60	-	-
	16/2	66.9	2.63	-	-	-	-
PU..A	08/2	49.5	1.95	46.5	1.83	-	-
	10/2	44	1.73	41	1.61	-	-
	12/2	45	1.77	42	1.65	-	-
	16/2	52	2.05	49	1.93	-	-
PW..A	08/2	64.5	2.54	62	2.44	-	-
	10/2	71.9	2.83	69.4	2.73	-	-
	12/2	64.5	2.54	62	2.44	-	-
	16/2	68	2.68	65.5	2.58	-	-
PP..A	08/3	49.5	1.95	46.5	1.83	-	-
	10/3	44	1.73	41	1.61	-	-
	12/3	45	1.77	42	1.65	-	-
	16/3	52	2.05	49	1.93	-	-


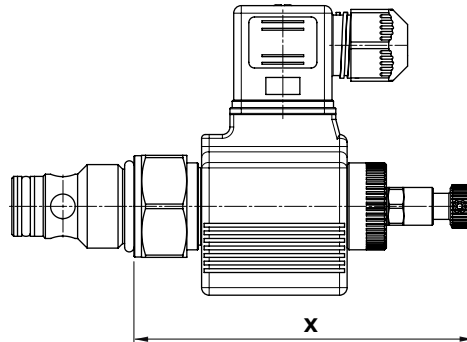


Valve type	Dimension "X"															
	N / O without emergency		T screw type		P push button		D push type with detent		F pull button		Q pull type with detent		E with pull/ push-button		V handknob	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
MC10X	86	3.39	105	4.13	-	-	-	-	-	-	-	-	-	-	-	-
MC10X-HF	94.8	3.73	94.5	3.72	-	-	-	-	-	-	-	-	-	-	-	-
MP10X	86	3.39	105	4.13	-	-	-	-	-	-	-	-	-	-	-	-
MP12X	102	4.02	121	4.76	-	-	-	-	-	-	-	-	-	-	-	-
PU08X	94	3.70	108	4.25	-	-	-	-	-	-	-	-	-	-	142	5.59
PU10X	96.4	3.79	110.4	4.35	-	-	-	-	-	-	-	-	-	-	144.4	5.68
PU12X	97.4	3.83	111.4	4.50	-	-	-	-	-	-	-	-	-	-	145.4	5.72
PU16X	121.4	4.78	135.4	5.33	-	-	-	-	-	-	-	-	-	-	169.4	6.67
PP08X	94	3.70	108	4.25	-	-	-	-	-	-	-	-	-	-	142	5.59
PP10X	96.4	3.79	110.4	4.35	-	-	-	-	-	-	-	-	-	-	144.1	5.67
PP12X	97.4	3.83	111.4	4.39	-	-	-	-	-	-	-	-	-	-	145.1	5.71
PP16X	121.4	4.78	135.4	5.33	-	-	-	-	-	-	-	-	-	-	169.4	6.67
EA08A	NO	60	2.36	79.3	3.12	-	-	-	-	-	-	-	-	-	-	-
	NC	59	2.32	79	3.11	-	-	-	-	-	-	-	-	-	-	-
EA08B	NO	70.9	2.79	90.3	3.55	-	-	-	-	-	-	-	-	-	-	-
	NC	65.5	2.58	90.5	3.56	-	-	-	-	-	-	-	-	-	-	-
EC08M	NO	67.2	2.64	90.1	3.55	90.1	3.55	92.8	3.65	-	-	-	-	-	-	-
EF08M	NC	63.3	2.49	77.8	3.06	-	-	-	-	91.3	3.59	83.8	3.30	-	-	-
EH08M	NC	63.3	2.49	77.8	3.06	-	-	-	-	91.3	3.59	83.8	3.30	-	-	-
EC10M	NO	66.9	2.63	89.8	3.54	89.8	3.54	92.5	3.64	-	-	-	-	-	-	-
EF10M	NC	63	2.48	77.5	3.05	-	-	-	-	91	3.58	83.5	3.29	-	-	-
EH10M	NC	63	2.48	77.5	3.05	-	-	-	-	91	3.58	83.5	3.29	-	-	-
EC12M	NO	61.1	2.40	84	3.31	84	3.31	86.8	3.42	-	-	-	-	-	-	-
EF12M	NC	57.2	2.25	71.7	-	-	-	-	-	85.2	3.35	77.7	3.06	-	-	-
EH12M	NC	57.2	2.25	71.7	-	-	-	-	-	85.2	3.35	77.7	3.06	-	-	-
EC16M	NO	61.2	2.41	84.1	3.31	84.1	3.31	86.9	3.42	-	-	-	-	-	-	-
EF16M	NC	57.3	2.26	71.8	-	-	-	-	-	85.3	3.36	77.8	3.06	-	-	-
EH16M	NC	57.3	2.26	71.8	-	-	-	-	-	85.3	3.36	77.8	3.06	-	-	-

Types and dimensions

Valve type		Dimension "X"															
		N / O without emergency		T screw type		P push button		D push type with detent		F pull button		Q pull type with detent		E with pull/ push-button		V handknob	
		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
EW08A	NO	65.7	2.59	73.5	2.89	-	-	-	-	-	-	-	-	-	-	-	-
	NC	70.9	2.79	90.3	3.56	87.2	3.43	-	-	-	-	-	-	-	-	-	-
EW10A	NC	-	-	-	-	83.3	3.28	-	-	-	-	-	-	-	-	-	-
EW10B	NO	99.8	3.93	-	-	-	-	-	-	-	-	-	-	-	-	-	-
EW12B	NO	102.8	4.05	-	-	-	-	-	-	-	-	-	-	-	-	-	-
EW12C	NC	-	-	-	-	98.7	3.89	-	-	-	-	-	-	-	-	-	-
EW08M	NO	60.1	2.37	77	3.03	-	-	-	-	88.1	3.47	81	3.19	-	-	-	-
	NC	62.5	2.46	85.4	3.36	85.4	3.36	88.1	3.47	-	-	-	-	-	-	-	-
EW10M	NC	81.3	3.20	95.3	3.75	104.2	4.10	106.3	4.19	-	-	-	-	-	-	-	-
EJ08F		65.7	2.59	73.5	2.89	-	-	-	-	-	-	-	-	-	-	-	-
EJ08G		65.7	2.59	73.5	2.89	-	-	-	-	-	-	-	-	-	-	-	-
EJ08M		56.1	2.21	70.6	2.78	-	-	-	-	84.1	3.31	77	3.03	-	-	-	-
EJ10M		68	2.68	82.5	3.25	-	-	-	-	96	3.78	88.9	3.50	-	-	-	-
EL08A		94.9	3.74	-	-	96	3.78	-	-	-	-	-	-	-	-	-	-
EL10C		86.7	3.41	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ER08M		75	2.95	100	3.94	-	-	-	-	115.5	4.55	95.8	3.77	-	-	-	-
ER10M		89	3.50	110.5	4.35	-	-	-	-	129.5	5.10	110	4.33	-	-	-	-
ET08M		120	4.72	-	-	121	4.76	165	6.50	-	-	-	-	165.6	6.52	-	-
ET10M		148.5	5.85	-	-	149.5	5.89	190.9	7.52	-	-	-	-	191.5	7.54	-	-
ET12A		156	6.14	-	-	156	6.14	-	-	-	-	-	-	-	-	-	-

Dimensions and ordering codes

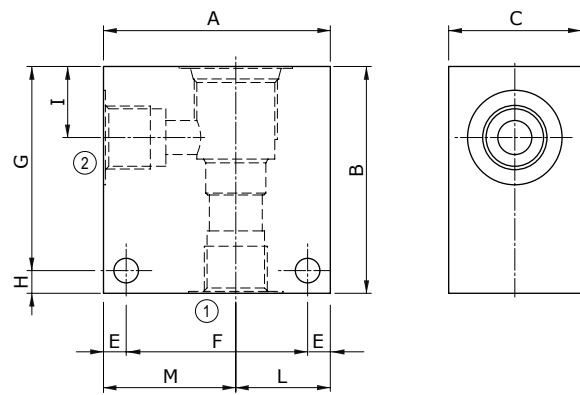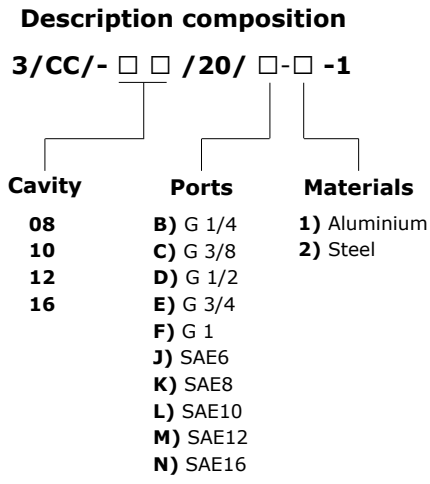



Material	Max. pressure	
	bar	psi
Aluminium	210	3050
Steel	350	5100

Cavity	Ports	Dimensions											Ordering code		
		A	B	C	E	F	G	H	I	L	M	Z	Aluminium	Steel	
SAE 08/2	G 1/4	mm	50	50	30	6	38	44	6	14.8	20	30	6.5	3CC0820B11	3CC0820B21
		in	1.97	1.97	1.18	0.24	1.50	1.73	0.24	0.58	0.79	1.18	0.26		
	G 3/8	mm	50	50	30	6	38	44	6	14.8	20	30	6.5	3CC0820C11	3CC0820C21
		in	1.97	1.97	1.18	0.24	1.50	1.73	0.24	0.58	0.79	1.18	0.26		
	G 1/2	mm	60	60	35	6	48	54	6	18	25	35	6.5	3CC0820D11	/
		in	2.36	2.36	1.38	0.24	1.89	2.16	0.24	0.71	0.98	1.38	0.26		
SAE6	mm	50	50	30	6	38	44	6	14.8	20	30	6.5	3CC0820J11	3CC0820J21	
	in	1.97	1.97	1.18	0.24	1.50	1.73	0.24	0.58	0.79	1.18	0.25			
SAE8	mm	60	60	30	6	48	54	6	14	25	35	6.5	3CC0820K11	3CC0820K21	
	in	2.36	2.36	1.18	0.24	1.89	2.16	0.24	0.55	0.98	1.38	0.25			
SAE 10/2	G 1/4	mm	60	60	35	6	48	54	6	18.8	25	35	6.5	3CC1020B11	3CC1020B21
		in	2.36	2.36	1.38	0.24	1.89	2.12	0.24	0.74	0.98	1.38	0.26		
	G 3/8	mm	60	60	35	6	48	54	6	18.8	25	35	6.5	3CC1020C11	3CC1020C21
		in	2.36	2.36	1.38	0.24	1.89	2.12	0.24	0.74	0.98	1.38	0.26		
	G 1/2	mm	60	60	35	6	48	54	6	18.8	25	35	6.5	3CC1020D11	3CC1020D21
		in	2.36	2.36	1.38	0.24	1.89	2.12	0.24	0.74	0.98	1.38	0.26		
	SAE8	mm	60	70	35	6	48	64	6	18.8	25	35	6.5	3CC1020J11	3CC1020J21
		in	2.36	2.75	1.38	0.24	1.89	2.52	0.24	0.74	0.98	1.38	0.26		
	SAE10	mm	70	70	35	6	58	64	6	18.5	35	35	6.5	3CC1020K11	3CC1020K21
		in	2.75	2.75	1.38	0.24	2.28	2.52	0.24	0.73	1.38	1.38	0.26		
	SAE12	mm	70	70	40	8	54	62	8	22	30	40	8.5	3CC1020L11	3CC1020L21
		in	2.75	2.75	1.57	0.31	2.12	2.44	0.31	0.87	1.18	1.57	0.33		

Dimensions and ordering codes

Cavity	Ports	Dimensions											Ordering code		
		A	B	C	E	F	G	H	I	L	M	Z	Aluminium	Steel	
SAE 12/2	G 1/2	mm	70	80	40	8	54	72	8	25	30	40	8.5	3CC1220D11	3CC1220D21
		in	2.75	3.15	1.57	0.31	2.12	2.83	0.31	0.98	1.18	1.57	0.33		
	G 3/4	mm	70	90	40	8	54	82	8	25	30	40	8.5	3CC1220E11	3CC1220E21
		in	2.75	3.54	1.57	0.31	2.12	3.23	0.31	0.98	1.18	1.57	0.33		
	SAE10	mm	70	85	40	8	54	77	8	25	30	40	8.5	3CC1220L11	3CC1220L21
		in	2.75	3.35	1.57	0.31	2.12	3.03	0.31	0.98	1.18	1.57	0.33		
	SAE12	mm	70	85	40	8	54	77	8	25	30	40	8.5	3CC1220M11	3CC1220M21
		in	2.75	3.35	1.57	0.31	2.12	3.03	0.31	0.98	1.18	1.57	0.33		
SAE 16/2	G 1/2	mm	80	90	50	10	60	80	10	25	35	45	10.5	3CC1620D11	3CC1620D21
		in	3.15	3.54	1.97	0.39	2.36	3.15	0.39	0.98	1.38	1.77	0.41		
	G 3/4	mm	80	90	50	10	60	80	10	25	35	45	10.5	3CC1620E11	3CC1620E21
		in	3.15	3.54	1.97	0.39	2.36	3.15	0.39	0.98	1.38	1.77	0.41		
	G 1	mm	85	100	60	10	65	90	10	23.5	40	45	10.5	3CC1620F11	3CC1620F210
		in	3.35	3.94	2.36	0.39	2.56	3.54	0.39	0.92	1.57	1.77	0.41		
	SAE12	mm	80	90	50	10	60	80	10	25	35	45	10.5	3CC1620M11	3CC1620M21
		in	3.15	3.54	1.97	0.39	2.36	3.15	0.39	0.98	1.38	1.77	0.41		
	SAE16	mm	80	100	50	10	60	90	10	25	35	45	10.5	3CC1620N11	3CC1620N21
		in	3.15	3.94	1.97	0.39	2.36	3.54	0.39	0.98	1.38	1.77	0.41		

Dimensions and ordering codes

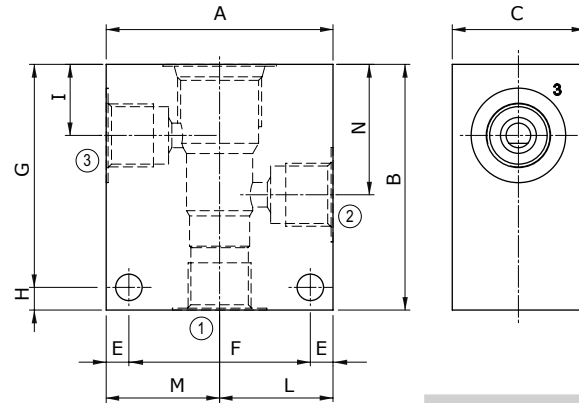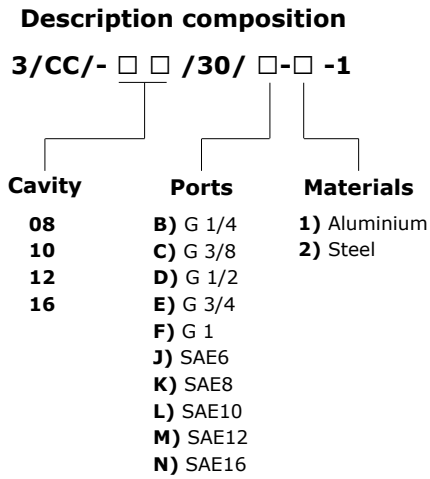



Material	Max. pressure	
	bar	psi
Aluminium	210	3050
Steel	350	5100

Cavity	Ports	Dimensions												Ordering code		
		A	B	C	E	F	G	H	I	L	M	N	Z	Aluminium	Steel	
SAE 8/3	G 1/4	mm	60	60	30	7	46	48	12	14.8	30	30	29.1	6.5	3CC0830B11	3CC0830B21
		in	2.36	2.36	1.18	0.27	1.81	1.89	0.47	0.58	1.18	1.18	1.14	0.25		
	G 3/8	mm	60	60	30	7	46	48	12	14.5	30	30	29.1	6.5	3CC0830C11	3CC0830C21
		in	2.36	2.36	1.18	0.27	1.81	1.89	0.47	0.57	1.18	1.18	1.14	0.25		
	G 1/2	mm	70	65	35	7	56	53	12	14.5	35	35	29.1	6.5	3CC0830D11	/
		in	2.75	2.56	1.38	0.27	2.20	2.09	0.47	0.57	1.38	1.38	1.14	0.25		
SAE6	mm	60	60	30	7	46	48	12	14.5	30	30	29.1	6.5	3CC0830J11	3CC0830J21	
	in	2.36	2.36	1.18	0.27	1.81	1.89	0.47	0.57	1.18	1.18	1.14	0.25			
SAE8	mm	60	60	30	7	46	48	12	15	30	30	29	6.5	3CC0830K11	3CC0830K11	
	in	2.36	2.36	1.18	0.27	1.81	1.89	0.47	0.59	1.18	1.18	1.14	0.25			
SAE 10/3	G 1/4	mm	60	65	35	6	48	59	6	18	30	30	34.5	7	3CC1030B11	3CC1030B21
		in	2.36	2.56	1.38	0.24	1.89	2.32	0.24	0.70	1.18	1.18	1.36	0.27		
	G 3/8	mm	60	65	35	6	48	59	6	18.8	30	30	34.5	7	3CC1030C11	3CC1030C21
		in	2.36	2.56	1.38	0.24	1.89	2.32	0.24	0.74	1.18	1.18	1.36	0.27		
	G 1/2	mm	65	70	35	6	53	64	6	18.8	32.5	32.5	34.5	7	3CC1030D11	3CC1030D21
		in	2.56	2.75	1.38	0.24	2.09	2.52	0.24	0.74	1.28	1.28	1.36	0.27		
	SAE6	mm	65	70	35	6	53	64	6	18.8	32.5	32.5	34.5	7	3CC1030J11	3CC1030J21
		in	2.56	2.75	1.38	0.24	2.09	2.52	0.24	0.74	1.28	1.28	1.36	0.27		
	SAE8	mm	65	70	35	6	53	64	6	18.8	32.5	32.5	34.5	7	3CC1030K11	3CC1030K21
		in	2.56	2.75	1.38	0.24	2.09	2.52	0.24	0.74	1.28	1.28	1.36	0.27		
	SAE10	mm	65	70	35	6	53	64	6	18	31.5	33.5	34.5	7	3CC1030L11	3CC1030L21
		in	2.56	2.75	1.38	0.24	2.09	2.52	0.24	0.70	1.24	1.32	1.36	0.27		

Dimensions and ordering codes

Cavity	Ports	Dimensions													Ordering code	
		A	B	C	E	F	G	H	I	L	M	N	Z	Aluminium	Steel	
SAE 12/3	G 1/2	mm	70	100	40	8	54	92	8	25	35	35	53.5	8.5	3CC1230D11	3CC1230D21
		in	2.75	3.94	1.57	0.31	2.12	3.6	0.31	0.98	1.38	1.38	2.10	0.33		
	G 3/4	mm	90	100	50	10	70	90	10	25.1	45	45	53.5	10.5	3CC1230E11	3CC1230E21
		in	3.54	3.94	1.97	0.39	2.75	3.54	0.39	0.99	1.77	1.77	2.11	0.41		
	SAE10	mm	80	100	40	8	64	92	8	25	40	40	53.5	8.5	3CC1230L11	3CC1230L21
		in	3.15	3.94	1.57	0.31	2.52	3.6	0.31	0.98	1.57	1.57	2.11	0.33		
	SAE12	mm	80	100	45	8	64	92	8	25	40	40	53.5	8.5	3CC1230M11	3CC1230M21
		in	3.15	3.94	1.77	0.31	2.52	3.6	0.31	0.98	1.57	1.57	2.11	0.33		
SAE16/3	G 1/2	mm	90	100	50	10	70	90	10	25	45	45	53.5	10.5	3CC1630D11	3CC1630D21
		in	3.54	3.94	1.97	0.39	2.75	3.54	0.39	0.98	1.77	1.77	2.11	0.41		
	G 3/4	mm	90	100	50	10	70	90	10	25.1	45	45	53.5	10.5	3CC1630E11	3CC1630E21
		in	3.54	3.94	1.97	0.39	2.75	3.54	0.39	0.99	1.77	1.77	2.11	0.41		
	G 1	mm	90	105	50	10	70	95	10	25	46	44	53.5	10.5	3CC1630F11	3CC1630F21
		in	3.54	4.13	1.97	0.39	2.75	3.74	0.39	0.98	1.81	1.73	2.11	0.41		
	SAE12	mm	90	105	50	10	70	95	10	25.1	45	45	53.5	10.5	3CC1630M11	3CC1630M21
		in	3.54	4.13	1.97	0.39	2.75	3.74	0.39	0.99	1.77	1.77	2.11	0.41		
	SAE16	mm	90	105	50	10	70	95	10	25.1	45	45	53.5	10.5	3CC1630N11	3CC1630N21
		in	3.54	4.13	1.97	0.39	2.75	3.74	0.39	0.99	1.77	1.77	2.11	0.41		

Dimensions and ordering codes

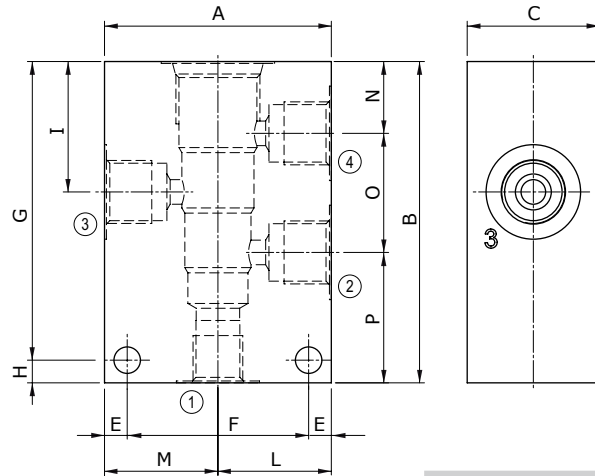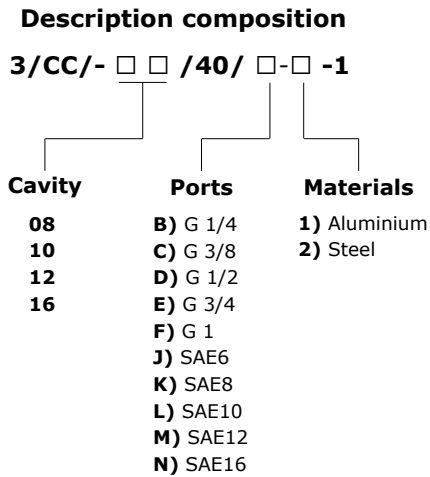


Material	Max. pressure	
	bar	psi
Aluminium	210	3050
Steel	350	5100

Cavity	Ports	Dimensions														Ordering code		
		A	B	C	E	F	G	H	I	L	M	N	O	P	Z	Aluminium	Steel	
SAE 8/4	G 1/4	mm	60	75	30	7	46	63	12	29.1	30	30	14.8	29.1	31.1	6.5	3CC0840B11	3CC0840B21
		in	2.36	2.95	1.18	0.27	1.81	2.48	0.47	1.14	1.18	1.18	0.58	1.14	1.22	0.25		
	G 3/8	mm	60	75	30	7	46	63	12	29.1	30	30	14.8	28.6	31.6	6.5	3CC0840C11	3CC0840C21
		in	2.36	2.95	1.18	0.27	1.81	2.48	0.47	1.14	1.18	1.18	0.58	1.13	1.24	0.25		
	SAE6	mm	60	75	30	7	46	63	12	29.1	30	30	14.8	29.1	31.1	6.5	3CC0840J11	3CC0840J21
		in	2.36	2.95	1.18	0.27	1.81	2.48	0.47	1.14	1.18	1.18	0.58	1.14	1.22	0.25		
	SAE8	mm	60	75	30	7	46	63	12	29	30	30	15	28.5	31.5	6.5	3CC0840K11	3CC0840K21
		in	2.36	2.95	1.18	0.27	1.81	2.48	0.47	1.14	1.18	1.18	0.59	1.12	1.24	0.25		
SAE 10/4	G 1/4	mm	60	85	35	6	48	79	6	34.5	30	30	19	31.5	34.5	7	3CC1040B11	3CC1040B21
		in	2.36	3.35	1.38	0.24	1.89	3.11	0.24	1.36	1.18	1.18	0.75	1.24	1.36	0.27		
	G 3/8	mm	60	85	35	6	48	79	6	34.5	30	30	18.8	31.7	34.5	7	3CC1040C11	3CC1040C21
		in	2.36	3.35	1.38	0.24	1.89	3.11	0.24	1.36	1.18	1.18	0.74	1.25	1.36	0.27		
	G 1/2	mm	70	85	35	6	58	79	6	34.5	35	35	18.8	31.7	34.5	7	3CC1040D11	3CC1040D21
		in	2.75	3.35	1.38	0.24	2.28	3.11	0.24	1.36	1.38	1.38	0.74	1.25	1.36	0.27		
	SAE6	mm	60	85	35	6	48	79	6	34.5	30	30	18.8	31.7	34.5	7	3CC1040J11	3CC1040J21
		in	2.36	3.35	1.38	0.24	1.89	3.11	0.24	1.36	1.18	1.18	0.74	1.25	1.36	0.27		
	SAE8	mm	70	85	35	6	58	79	6	34.5	35	35	18.8	31.7	34.5	7	3CC1040K11	3CC1040K21
		in	2.75	3.35	1.38	0.24	2.28	3.11	0.24	1.36	1.38	1.38	0.74	1.25	1.36	0.27		
SAE10	mm	70	85	35	6	58	79	6	34.5	35	35	19	31.5	34.5	7	3CC1040L11	3CC1040L11	
	in	2.75	3.35	1.38	0.24	2.28	3.11	0.24	1.36	1.38	1.38	0.75	1.24	1.36	0.27			

Dimensions and ordering codes

Cavity	Ports	Dimensions														Ordering code		
		A	B	C	E	F	G	H	I	L	M	N	O	P	Z	Aluminium	Steel	
SAE 12/4	G 3/8	mm	80	115	40	8	64	107	8	44	40	40	22	44.5	48.5	8.5	3CC1240C11	3CC1240C21
		in	3.15	4.53	1.57	0.31	2.52	4.21	0.31	1.73	1.57	1.57	0.87	1.75	1.9	0.33		
	G 1/2	mm	80	115	40	8	64	107	8	44	40	40	22	44.5	48.5	8.5	3CC1240D11	3CC1240D21
		in	3.15	4.53	1.57	0.31	2.52	4.21	0.31	1.73	1.57	1.57	0.87	1.75	1.9	0.33		
	SAE10	mm	80	115	40	8	64	107	8	44	40	40	22	44.5	48.5	8.5	3CC1240L11	3CC1240L21
		in	3.15	4.53	1.57	0.31	2.52	4.21	0.31	1.73	1.57	1.57	0.87	1.75	1.9	0.33		
SAE 16/4	G 3/4	mm	100	130	50	10	80	120	10	53.5	50	50	25.1	56.9	48	10.5	3CC1640E11	3CC1640E21
		in	3.94	5.12	1.97	0.39	3.15	4.72	0.39	2.11	1.97	1.97	0.99	2.24	1.89	0.41		
	SAE16	mm	100	130	50	10	80	120	10	53.5	50	50	25.1	56.9	48	10.5	3CC1640N11	3CC1640N21
		in	3.94	5.12	1.97	0.39	3.15	4.72	0.39	2.11	1.97	1.97	0.99	2.24	1.89	0.41		

How to order valves with body

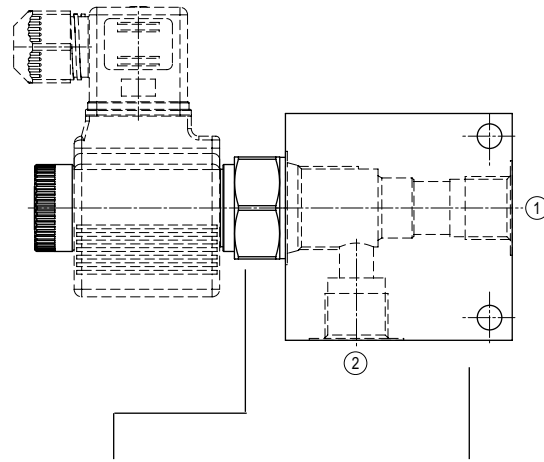

Cartridge description

Body description

EC 10 M/10NB

C 1 1

Cavity


- 08
- 10
- 12
- 16

Ports

- B) G 1/4
- C) G 3/8
- D) G 1/2
- E) G 3/4
- F) G 1
- J) SAE6
- K) SAE8
- L) SAE10
- M) SAE12
- N) SAE16

Materials


- 1) Aluminium
- 2) Steel

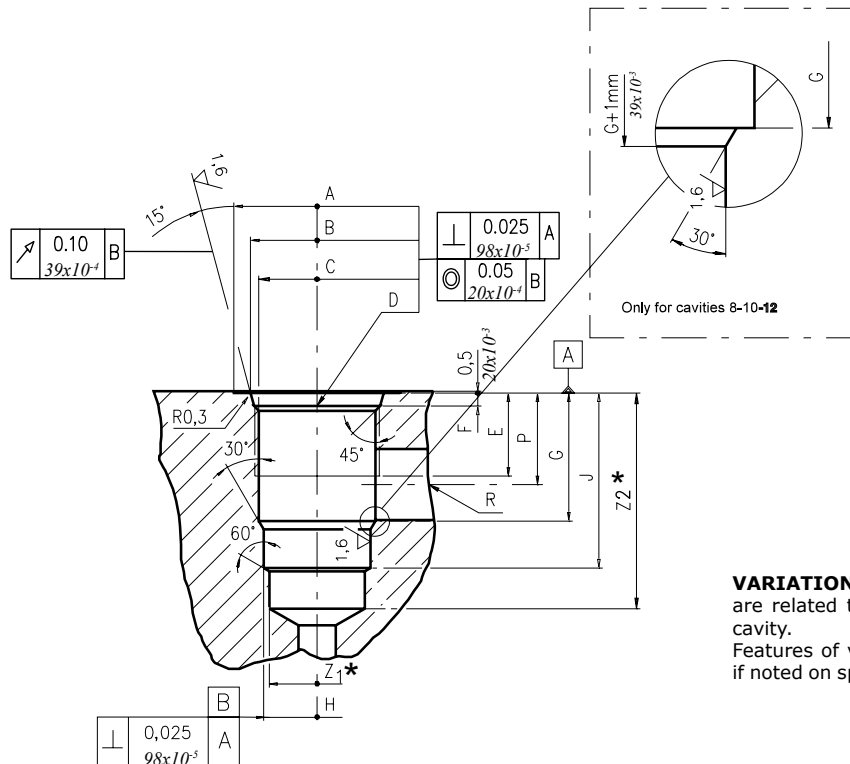

VARIATION "A": the dimensions with "*" are related to the variation "A" of 2 ways cavity. Features of variation "A" are required only if noted on specific product catalogue page.

Cavity	A	B ±0.05	C ±0.05	D	E	F	G	H ±0.02	J	K ±0.02	L	M ±0.02	N	P	R ØMAX	S	T ØMAX	U	V ØMAX	X ØMAX	Z1* ØMIN	Z2* MIN
08/2	mm 27	20.66	17.42	3/4-16 UNF	12.50	2.50	18.20	12.72	29.50	-	-	-	-	14.00	8.00	-	-	-	-	-	12.00	39
08/2 A	in 1.06	0.81	0.68		0.49	0.10	0.72	0.50	1.16	-	-	-	-	0.55	0.31	-	-	-	-	-	0.47	1.53
10/2	mm 30	24.00	20.62	7/8-14 UNF	16.00	2.80	24.00	15.90	33.50	-	-	-	-	18.30	11.00	-	-	-	-	-	14.50	40
10/2 A	in 1.18	0.94	0.81		0.63	0.11	0.94	0.62	1.32	-	-	-	-	0.72	0.43	-	-	-	-	-	0.57	1.57
12/2	mm 38	29.23	24.73	1 1/16-12 UNF	19.00	3.50	34.15	22.25	46.80	-	-	-	-	24.50	19.00	-	-	-	-	-	21.50	60
12/2 A	in 1.50	1.15	0.97		0.75	0.14	1.34	0.87	1.84	-	-	-	-	0.96	0.75	-	-	-	-	-	0.85	2.36
16/2	mm 45	35.60	31.34	1 5/16-12 UNF	22.00	3.50	34.00	28.62	47.00	-	-	-	-	24.50	19.00	-	-	-	-	-	25.50	70
16/2 A	in 1.77	1.40	1.23		0.87	0.14	1.34	1.13	1.85	-	-	-	-	0.96	0.75	-	-	-	-	-	1.00	2.75

Rougher tool



Cavity	Code number
08/2	3UT00053190
10/2	3UT00056610
12/2	3UT00054090
16/2	3UT00054510

Finisher tool




Cavity	Code number
08/2	3UT06A1270N
10/2	3UT00054580
12/2	3UT00054670
16/2	3UT00054520

Tap



Cavity	Code number
08/2	3UT03416UNF
10/2	3UT07814UNF
12/2	3UT0111612UN
16/2	3UT0151612UN


Cavity plugs

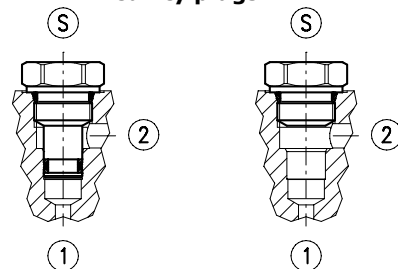

Cavity	Code number	①	②	Ⓢ
08/2	3XTP3533700	X	X	X
	3XTP1531900	0	0	X
10/2	3XTP3544200	X	X	X
	3XTP1542300	0	0	X
12/2	3XTP3555400	X	X	X
	3XTP1552900	0	0	X
16/2	3XTP3575500	X	X	X
	3XTP1572900	0	0	X

X=Closed 0=Open


Dimensions

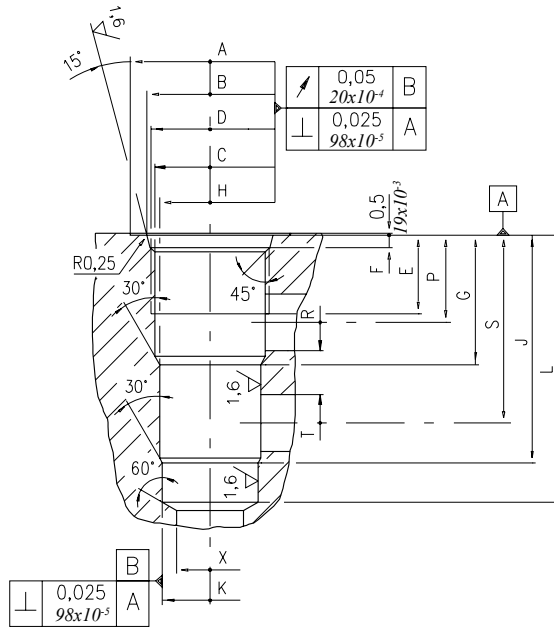

Cavity	A	B ±0,05	C ±0,05	D	E	F	G	H ±0,02	J	K ±0,02	L	M ±0,02	N	P	R øMAX	S	T øMAX	U øMAX	V øMAX	X øMAX	
08/3	mm	27	20,66	17,42	3/4 -16 UNF	12,50	2,50	19,10	15,90	33,30	14,30	43,30	-	-	14,30	5,50	28,60	5,50	-	-	12,50
	in	1.06	0.81	0.68		0.49	0.10	0.75	0.62	1.31	0.56	1.70			0.56	0.22	1.12	0.22			0.49
10/3	mm	30	24,00	20,62	7/8 -14 UNF	16,00	2,80	23,10	17,50	39,60	15,90	47,60	-	-	18,30	6,50	34,00	6,50	-	-	14,00
	in	1.18	0.94	0.81		0.63	0.11	0.94	0.69	1.56	0.62	1.87			0.72	0.25	1.34	0.25			0.55
12/3	mm	38	29,23	24,73	1 1/16 -12 UNF	19,00	3,56	36,60	23,82	63,50	22,25	75,40	-	-	24,50	16,00	53,00	16,00	-	-	19,00
	in	1.50	1.15	0.97		0.75	0.14	1.44	0.94	2.5	0.88	2.97			0.96	0.63	2.09	0.63			0.75
16/3	mm	45	35,60	28,62	1 5/16 -12 UNF	22,00	3,50	36,50	28,62	64,30	27,02	75,30	-	-	24,50	16,00	53,00	16,00	-	-	19,00
	in	1.77	1.40	1.13		0.87	0.14	1.44	1.13	2.53	1.06	2.96			0.96	0.63	2.09	0.63			0.75
20/3	mm	58	43,60	36,55	1 5/8 -12 UNF	21,00	3,50	46,00	36,55	87,60	33,37	100	-	-	31	25,40	71,5	25,40	-	-	30,00
	in	2.28	1.71	1.44		0.83	0.14	1.81	1.04	3.45	1.31	3.93			1.22	1	2.81	1			1.18

Cavity plugs

Rougher tool



Cavity	Code number
08/3	3UT00052190
10/3	3UT00054170
12/3	3UT00054290
16/3	3UT00054470

Finisher tool




Cavity	Code number
08/3	3UT00052740
10/3	3UT00054180
12/3	3UT00054300
16/3	3UT00054480

Tap




Cavity	Code number
08/3	3UT03416UNF
10/3	3UT07814UNF
12/3	3UT0111612UN
16/3	3UT0151612UN

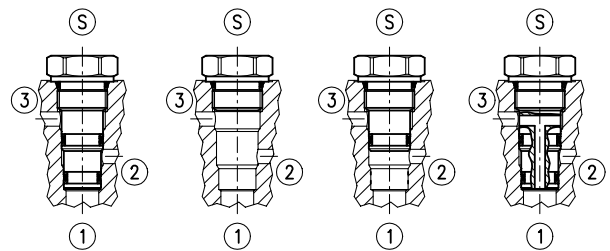


Cavity	Code number	①	②	③	Ⓢ
08/3	3XTP3535100	X	X	X	X
	4TP5531500	0	0	0	X
	3XTP3534000	0	0	X	X
	3XTP3534800	0	X	0	X
10/3	3XTP3545700	X	X	X	X
	3XTP1542300	0	0	0	X
	3XTP3545701	0	X	0	X
12/3	3XTP3558200	X	X	X	X
	3XTP1552900	0	0	0	X
	3XTP35558201	0	X	0	X
16/3	3XTP3578400	X	X	X	X
	3XTP1572900	0	0	0	X

X=Closed 0=Open

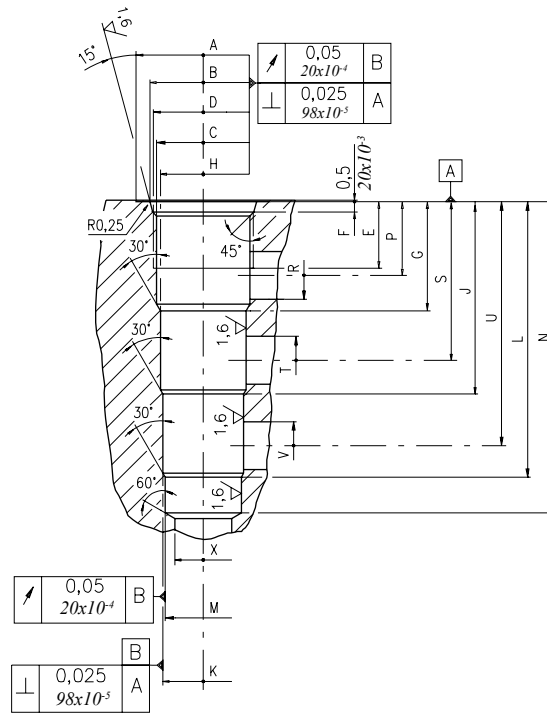

Cavity	A	B ±0,05	C ±0,05	D	E	F	G	H ±0,02	J	K ±0,02	L	M ±0,02	N	P	R ϕMAX	S ϕMAX	T ϕMAX	U	V ϕMAX	X ϕMAX	
08/4	mm	28,00	20,66	17,42	3/4-16 UNF	12,50	2,50	19,10	15,90	33,30	14,30	47,60	12,72	57,60	14,30	5,50	28,60	5,50	42,90	5,50	11,00
	in	1.10	0.81	0.68		0.49	0.10	0.75	0.62	1.31	0.56	1.87	0.50	2.27	0.56	0.22	1.12	0.22	1.69	0.22	0.43
10/4	mm	30	24,00	20,62	7/8-14 UNF	16,00	2,80	23,60	19,08	39,60	17,50	55,40	15,90	63,50	18,30	6,50	34,00	6,50	50,00	6,50	14,00
	in	1.18	0.94	0.81		0.63	0.11	0.93	0.75	1.56	0.69	2.18	0.62	2.50	0.72	0.26	1.34	0.25	1.97	0.25	0.55
12/4	mm	38	29,23	24,73	1 1/16-12 UNF	19,00	3,56	29,50	23,82	51,50	22,25	73,60	20,65	83,33	21,50	11,00	43,50	11,00	66,00	11,00	19,00
	in	1.50	1.15	0.97		0.75	0.14	1.16	0.94	2.03	0.87	2.90	0.81	3.28	0.85	0.43	1.71	0.43	2.60	0.43	0.75
16/4	mm	45	35,60	31,34	1 5/16-12 UNF	22,00	3,50	36,50	28,62	64,30	27,02	92,07	25,45	104,00	24,60	16,00	53,00	16,00	81,50	16,00	19,00
	in	1.77	1.40	1.23		0.87	0.14	1.44	1.13	2.53	1.06	3.62	1.00	4.09	0.97	0.63	2.09	0.63	3.21	0.63	0.75

Rougher tool




Finisher



Tap



Cavity plugs

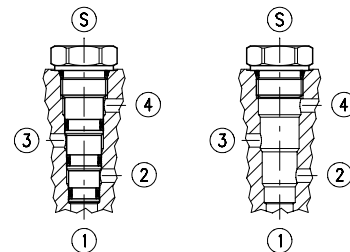

Cavity	Code number
08/4	3UT00052040
10/4	3UT00054250
12/4	3UT00054410
16/4	3UT00054820

Cavity	Code number
08/4	3UT00052020
10/4	3UT00054260
12/4	3UT00054420
16/4	3UT00054830

Cavity	Code number
08/4	3UT03416UNF
10/4	3UT07814UNF
12/4	3UT111612UN
16/4	3UT0151612UN

Cavity	Code number	①	②	③	④	Ⓢ
08/4	3XTP3536500	X	X	X	X	X
	4TP5531500	0	0	0	0	X
10/4	3XTP3548301	X	X	X	X	X
	3XTP1542300	0	0	0	0	X
12/4	3XTP3559300	X	X	X	X	X
	3XTP1552900	0	0	0	0	X
16/4	3XTP357B300	X	X	X	X	X
	3XTP1572900	0	0	0	0	X

X=Closed 0=Open