



GEAR PUMPS

GROUP 2.5

MODEL MGP

SERIES K


WWW.OLEODINAMICAMOZIONI.IT

GEAR PUMPS SERIES "K" MANUFACTURED BY OLEODINAMICA MOZIONI ARE THE MOST USED IN HYDRAULIC UNITS IN THE HYDRAULIC SYSTEMS OF MOBILE MACHINES AND CONFORM TO INTERNATIONAL STANDARDS.

WE USE THE ADVANCED WORLD'S CONCEPTS - IMPROVING THE TECHNICAL CHARACTERISTICS OF THE PRODUCT, USE ONLY HIGH QUALITY MATERIALS AND HARDWARE MANUFACTURERS OF THE WORLD AT ALL STAGES OF DESIGN AND PRODUCTION. THE QUALITY MANAGEMENT SYSTEM CONFORMS INTERNATIONAL STANDARD ISO 9001: 2008.

GEAR PUMPS SERIES "K" OF OLEODINAMICA MOZIONI HAVE HIGH VOLUMETRIC AND MECHANICAL EFFICIENCY, LOW NOISE AND OPERATE RELIABLY IN A VARIETY HYDRAULIC SYSTEMS AND MOBILE MACHINERY.


- DIMENSIONS OF THE PUMPS ARE ACCORDING TO INTERNATIONAL STANDARDS SAE, DIN, EUROPEAN.
- GEAR PUMPS ARE SUPPLIED IN NEXT GROUPS: MGP1K, MGP2K, MGP2.5K, MGP3K WITH DISPLACEMENTS FROM 1 TO 90 cm³/REV.
- MAXIMUM CONTINUOUS PRESSURE UP TO 250 BAR.
- MOUNTING FLANGES AND REAR COVERS ARE PRODUCED WITH ALUMINIUM OR CAST IRON.
- BUILT-IN VALVES IN REAR COVER.
- MULTIPLE UNITS AVAILABLE WITH SEPARATED OR COMMON INLET FOR STAGES.
- PUMPS WITH BEARING SUPPORT FOR HEAVY DUTY APPLICATIONS.

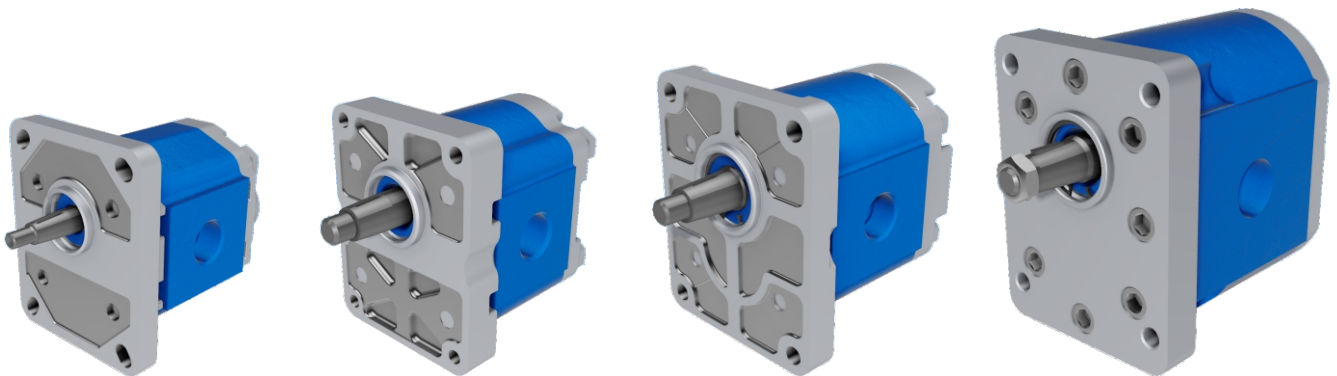

GEAR PUMPS SERIES "K" ARE MANUFACTURED WITH THRU-BOLT OF ROLLED ALUMINIUM, MOUNTING FLANGES AND REAR COVERS EITHER IN ALUMINIUM OR IN CAST IRON FOR MOBILE MACHINES, WHERE THERE ARE INCREASED REQUIREMENTS FOR THE NOISE LEVEL.

GEAR PUMPS SERIES "K" HAVE HIGH ANTI-FRICTION AND STRENGTH CHARACTERISTICS. THE SEALS REDUCE INTERNAL FLOW OF THE FLUID AND TO ACHIEVE A HIGH VOLUMETRIC EFFICIENCY.

1. DRIVE SHAFT
2. DRIVEN SHAFT
3. BEARING HOUSING
4. BODY
5. SLIDE BEARING
6. MOUNTING FLANGE
7. REAR COVER
8. COMPENSATION SEAL
9. ANTI-EXTRUSION PLATE
10. SEALING RING
11. SHAFT SEAL
12. STOP RING
13. CENTERING PIN
14. SCREW
15. WASHER

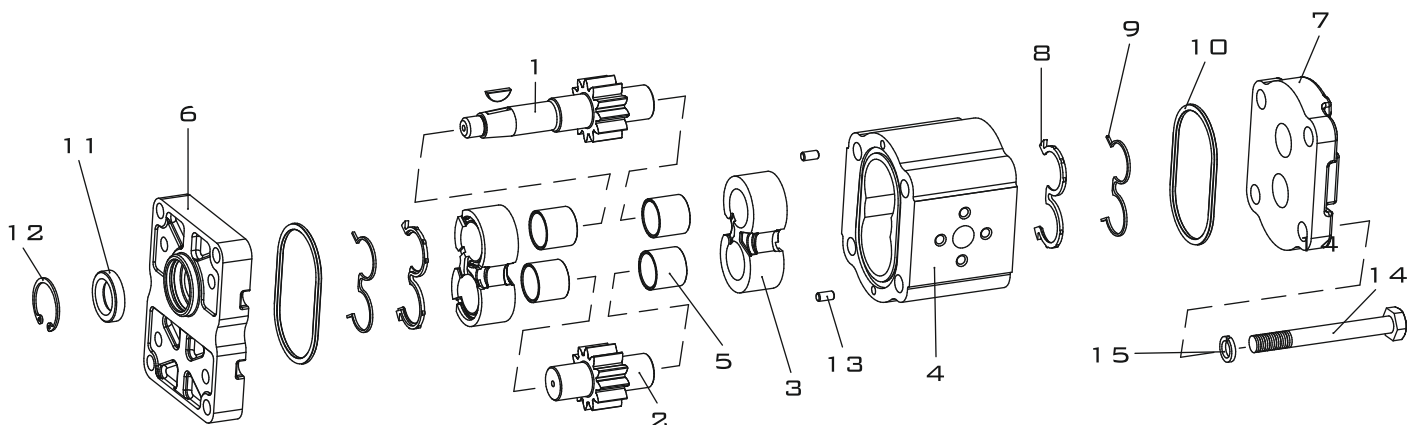



POMPE AD INGRANAGGI

MGP2.5


GEAR PUMPS
GROUP 2.5

WORKING CONDITIONS


INLET PRESSURE (MAX.)	0.5 – 2.5 BAR
MIN. OPERATING FLUID VISCOSITY	10 MM ² /SEC
MAX. STARTING VISCOSITY (COLD START)	1000 MM ² /SEC
FLUID VISCOSITY RECOMMENDED RANGE	17 – 65 MM ² /SEC
FLUID OPERATING TEMPERATURE RANGE WITH NBR SEALS	-40 + 100 °C
FLUID OPERATING TEMPERATURE RANGE WITH FPM SEALS (VITON)	-20 + 170 °C
HYDRAULIC FLUID	MINERAL OIL
CONTAMINATION CLASS ISO 4406	18/15 (>200 BAR), 19/16 (<200 BAR)
CONTAMINATION CLASS NAS 1638	9 (>200 BAR), 10 (<200 BAR)
ACHIEVED WITH FILTER $\beta_x=75$	15 μ M (>200 BAR), 25 μ M (<200 BAR)

DEFINITION OF ROTATION DIRECTION LOOKING ON THE DRIVE SHAFT

COUNTERCLOCKWISE ROTATION

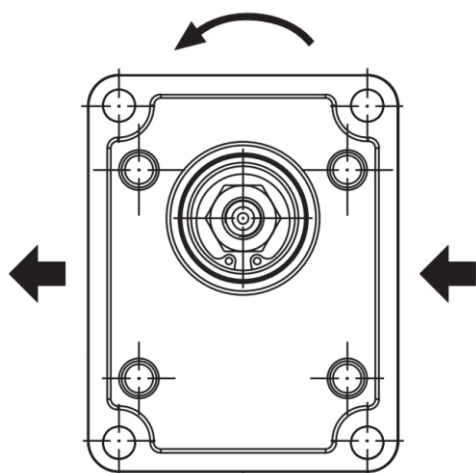


CLOCKWISE ROTATION

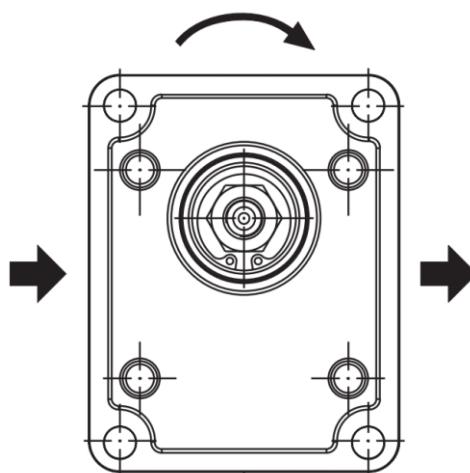

TECHNICAL DATA AND INSTALLATION DIMENSIONS

TYPE	MGP2.5K16	MGP2.5K19	MGP2.5K20	MGP2.5K23	MGP2.5K25	MGP2.5K28	MGP2.5K30	MGP2.5K32	MGP2.5K36	MGP2.5K37	MGP2.5K38	MGP2.5K40	MGP2.5K45
DISPLACEMENT, CM^3/REV	16,0	19,0	20,0	23,0	25,0	28,0	30,0	32,0	36,0	37,0	38,0	40,0	45,0
DIMENSION A, MM	71,8	75,0	76,2	79,5	81,7	85,0	87,3	89,5	94,0	95,0	96,0	98,0	104
DIMENSION B, MM	35,9	37,5	38,1	39,8	40,9	42,5	43,7	44,8	47,0	47,5	48,0	49,0	51,8
MAX. CONTINUOUS PRESSURE P_1 , BAR	250							230	200		170		
MAX. INTERMITTENT PRESSURE P_2 , BAR	280							250	220		190		
PEAK PRESSURE P_3 , BAR	300							260	240		210		
MAX. SPEED N_{MAX} , MIN^{-1}	3000									2750	2500		
MIN. SPEED AT $P_1 \leq 100$ BAR, N_{MIN} , MIN^{-1}	700				600						500		
WEIGHT*, KG	4,8	4,9	5,0	5,1	5,2	5,3	5,5	5,6	5,8	5,8	5,9	6,0	6,2

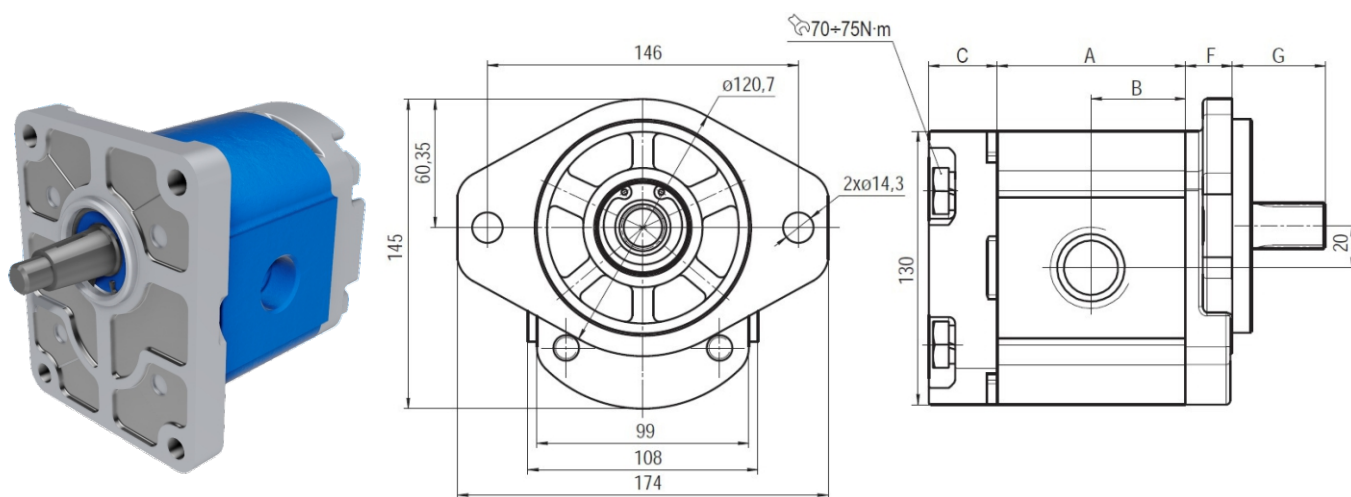

DIMENSION G SEE AT SECTION "DRIVE SHAFTS"
DIMENSION F SEE AT SECTION "MOUNTING FLANGES"
DIMENSION C SEE AT SECTION "REAR COVERS"

* - WEIGHT SPECIFIED FOR PUMPS WITH ALUMINUM COVERS.
WEIGHT FOR PUMPS WITH CAST IRON COATINGS MUST BE CLARIFY.










POMPE AD INGRANAGGI

MGP2.5

GEAR PUMPS
GROUP 2.5

COMBINATIONS OF MOUNTING FLANGES & SHAFTS


MGP2.5K	 EUROPEAN	 SAE A 2 BOLTS	 SAE B 2 BOLTS
 SAE A SPLINED (10 TEETH)		B3 31	
 SAE A SPLINED (11 TEETH)		B4 31	
 SAE B SPLINED (13 TEETH)			B5 33
 EUROPEAN TAPERED 1:8	G3 63		
 SAE B STRAIGHT Ø22,2			G3 33

THIS COMBINATIONS OF MOUNTING FLANGES AND SHAFTS ARE USED TO SERIAL PRODUCTION. THE OTHER COMBINATIONS AND DATE OF PRODUCTION, BEFORE ORDERING CLARIFY WITH THE MANUFACTURER.

SEE ALSO: MGP1K
MGP2K, MGP3K


DRIVE SHAFTS

MAX. TORQUE 100 N·M

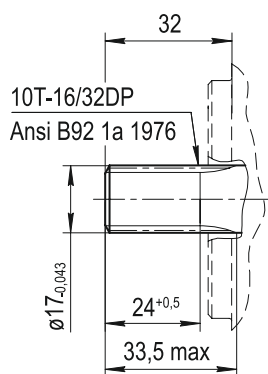


B3 – SAE A SPLINED (10 TEETH)

MAX. TORQUE 140 N·M

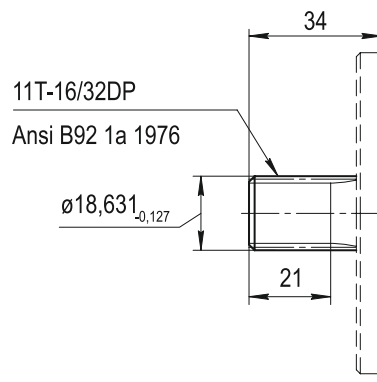


B4 – SAE A SPLINED (11 TEETH)

MAX. TORQUE 320 N·M

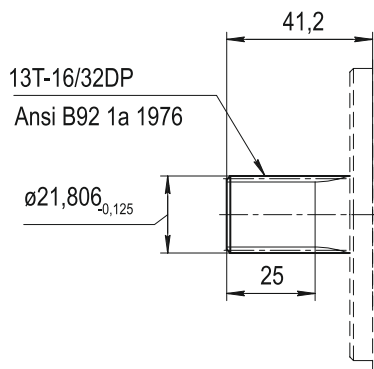


B5 – SAE B SPLINED (13 TEETH)

MAX. TORQUE 250 N·M

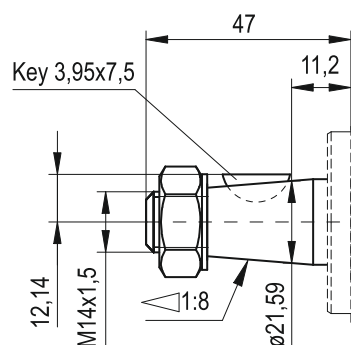

G3 – EUROPEAN TAPERED 1:8

MAX. TORQUE 220 N·M

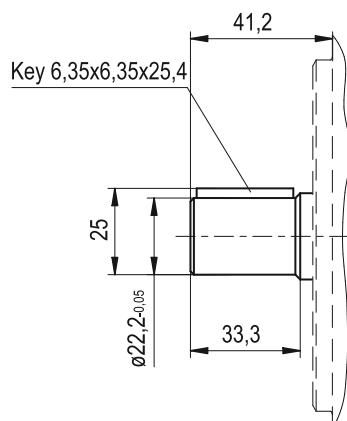

H3 – SAE B STRAIGHT Ø22,2




POMPE AD INGRANAGGI


MGP2.5

GEAR PUMPS
GROUP 2.5


MOUNTING FLANGES

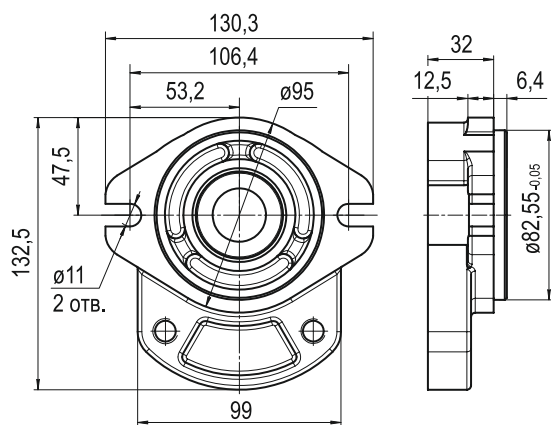

31 - SAE A 2 BOLTS

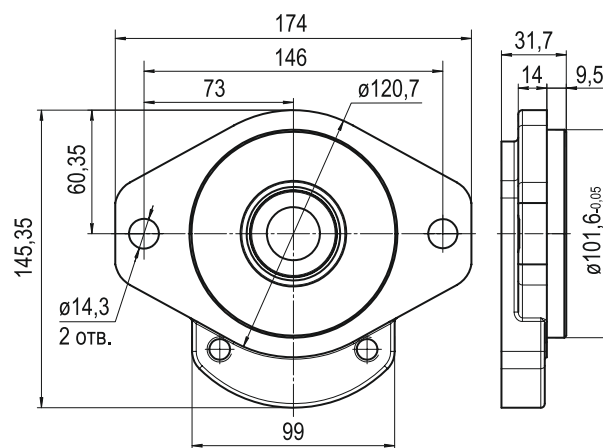


33 - SAE B 2 BOLTS

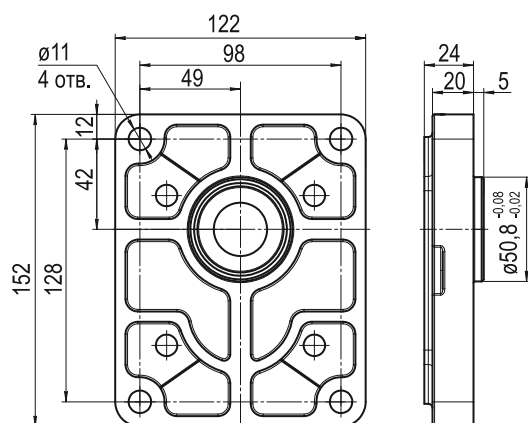


63 - EUROPEAN

PORTS




B – EUROPEAN FLANGE

TYPE	INLET				OUTLET			
	D	A	Z	E	D	A	Z	E
MGP2.5K16÷20	19	40	M8	13	13	30	M6	13
MGP2.5K23÷45	25	51	M10	17	19	40	M8	17




C – GERMAN FLANGE

TYPE	INLET				OUTLET			
	D	A	Z	E	D	A	Z	E
MGP2.5K16÷45	25	55	M8	17	19	55	M8	17

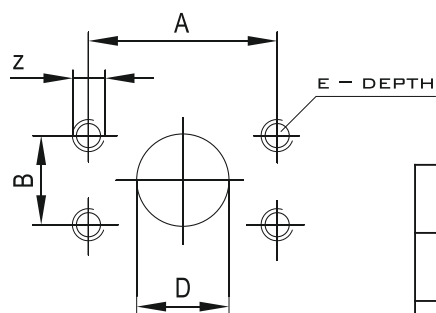

D – SAE FLANGE (UNC)

TYPE	INLET					OUTLET				
	D	A	B	Z	E	D	A	B	Z	E
MGP2.5K16÷45	25	52,4	26,2	3/8 16 UNC	16	19	47,6	22,2	3/8 16 UNC	14

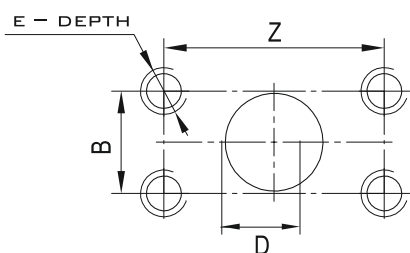

W – SAE FLANGE (METRIC)

TYPE	INLET					OUTLET				
	D	A	B	Z	E	D	A	B	Z	E
MGP2.5K16÷45	25	52,4	26,2	M10	16	19	47,6	22,2	M10	16




POMPE AD INGRANAGGI

MGP2.5


GEAR PUMPS
GROUP 2.5

PORTS




E - METRIC THREADED

TYPE	INLET			OUTLET		
	Z	B	D	Z	B	D
MGP2.5K16÷23	M27x2	19	22	M22x1,5	16	18
MGP2.5K25÷45	M33x2	21	25	M27x2	19	22



F - SAE THREADED

TYPE	INLET					OUTLET				
	Z	B	D	Y	K	Z	B	D	Y	K
MGP2.5K16÷23	1 1/16-12 UN (SAE#12)	19	20	42	3,3	7/8-14 UNF (SAE#10)	19	15	32	2,5
MGP2.5K25÷45	1 5/16-12 UN (SAE#16)		23	51		1 1/16-12 UN (SAE#12)		20	42	3,3



G - GAS THREADED

TYPE	INLET			OUTLET		
	Z	B	D	Z	B	D
MGP2.5K16÷23	3/4" GAS	19	20	1/2" GAS	16	13
MGP2.5K25÷45	1" GAS	21	27	3/4" GAS	19	20


MGP2.5

GEAR PUMPS
GROUP 2.5


POMPE AD INGRANAGGI



REAR COVERS

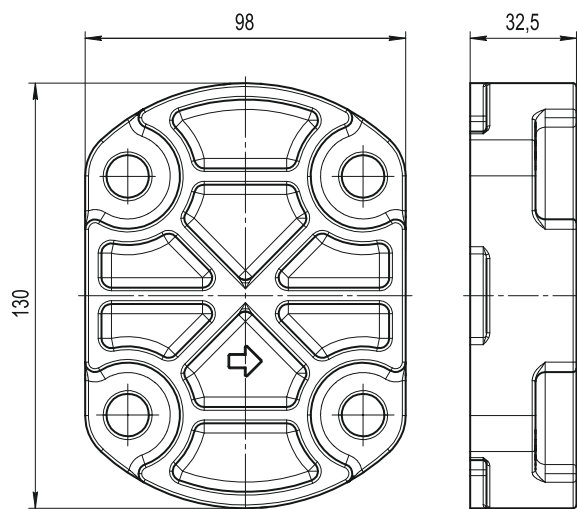


ALUMINIUM

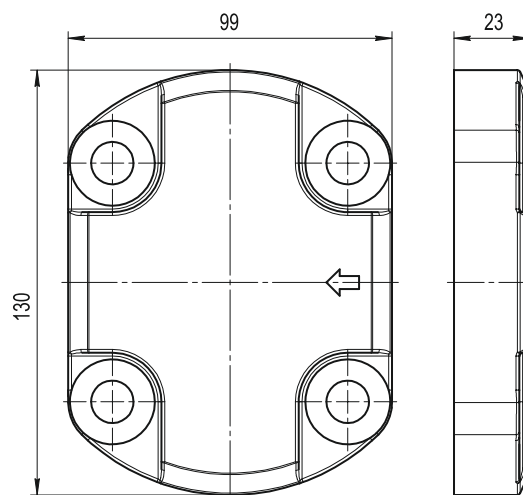

CAST IRON

STANDART REAR COVERS

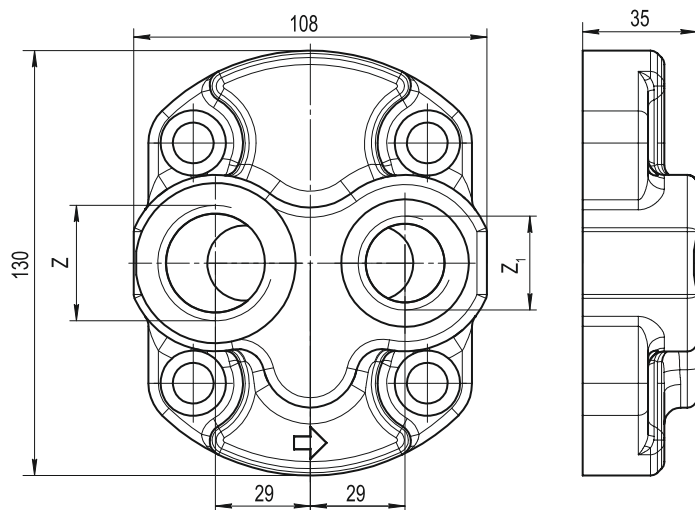

CAST IRON


TYPE	INLET	OUTLET
	Z	Z ₁
MGP2.5K 16÷23	3/4" GAS	1/2" GAS
MGP2.5K 25÷45	1" GAS	3/4" GAS
MGP2.5K 16÷23	1 1/16-12 UN	7/8-14 UNF
MGP2.5K 25÷45	1 5/16-12 UN	1 1/16-12 UN

1 - REAR COVER WITH THREADED PORTS



CHARACTERISTIC CURVES


CHARACTERISTIC CURVES CARRIED OUT WITH OIL VISCOSITY AT 16 MM²/SEC,
OIL TEMPERATURE AT 60 °C AND MAX. CONTINUOUS PRESSURES FOR EACH TYPE.

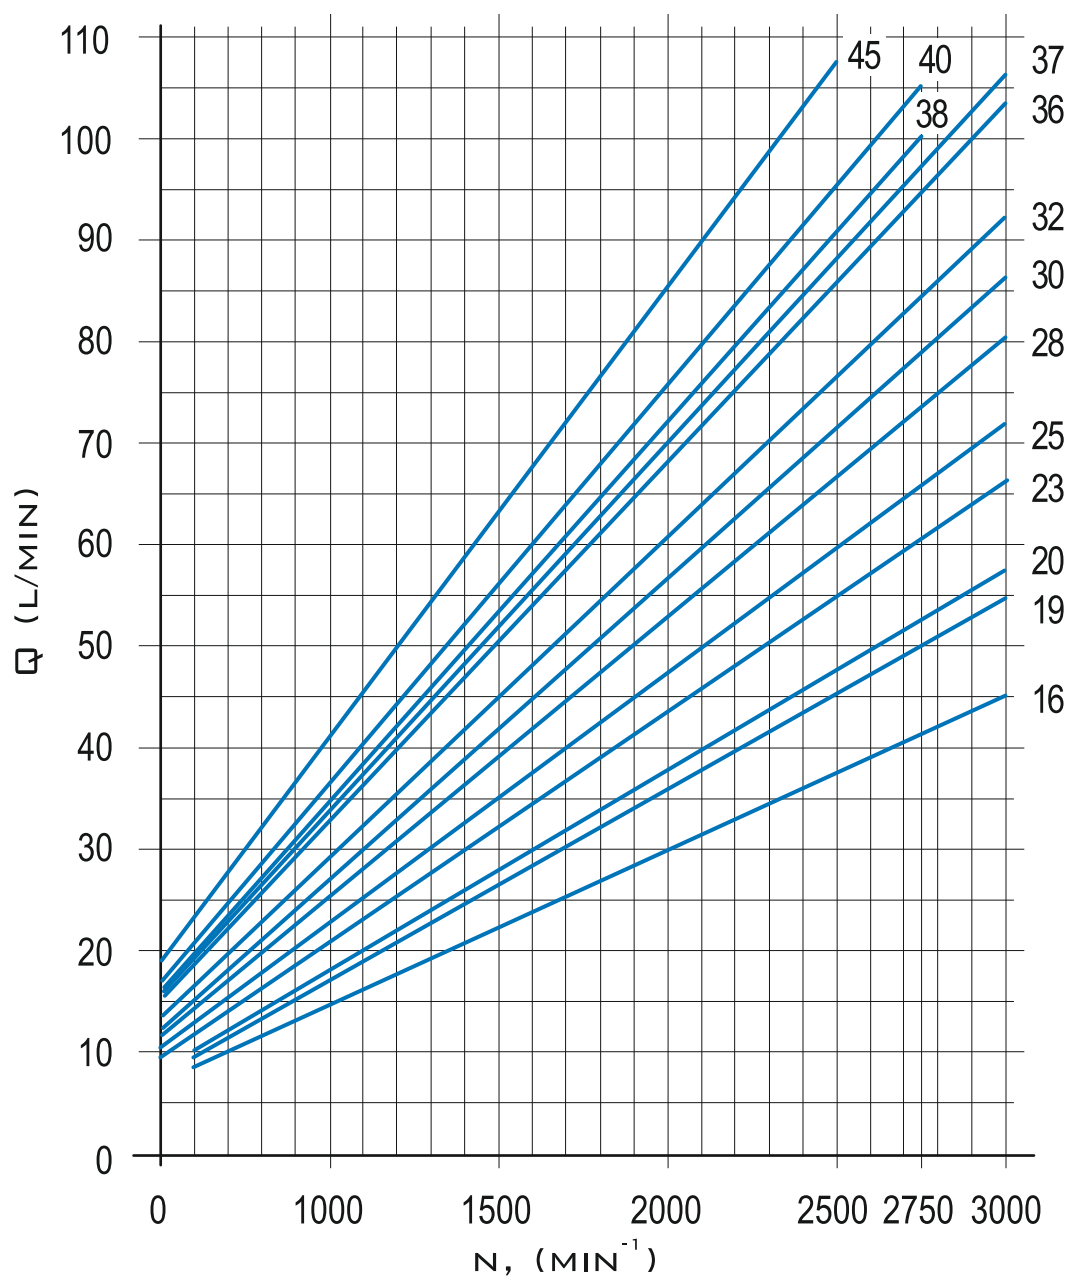


CHARACTERISTIC CURVES

CHARACTERISTIC CURVES CARRIED OUT WITH OIL VISCOSITY AT 16 MM²/SEC AND OIL TEMPERATURE AT 60 °C.


MGP2.5K16

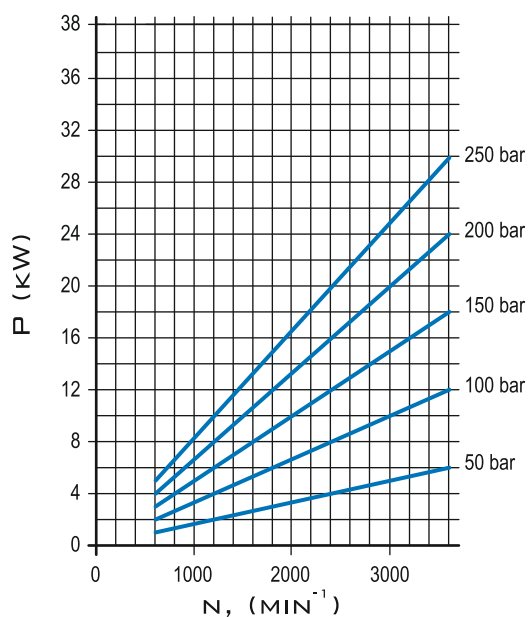


MGP2.5K19

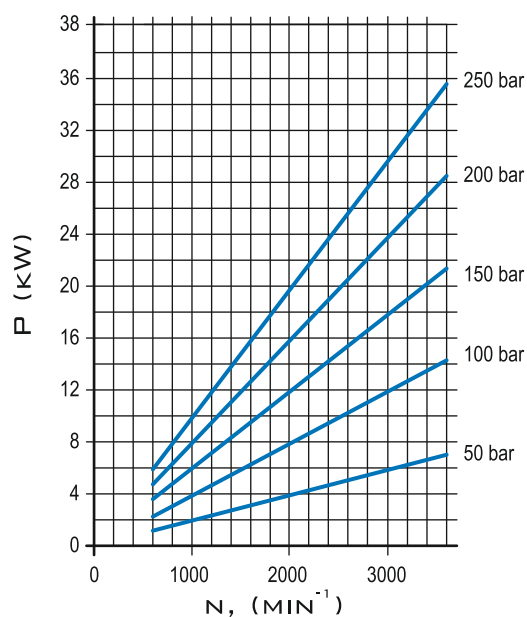

MGP2.5K20

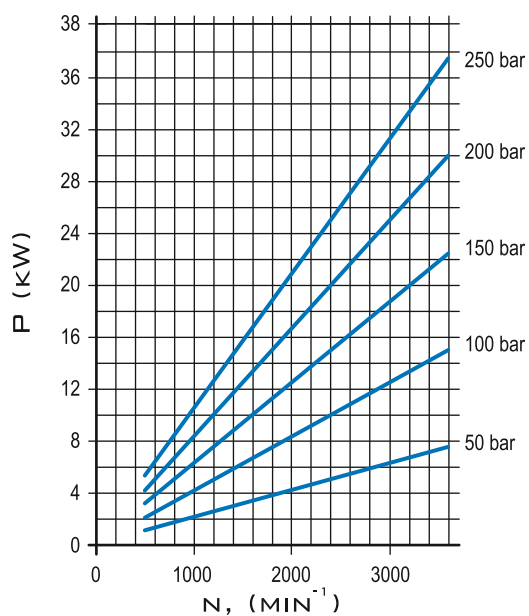

MGP2.5K23

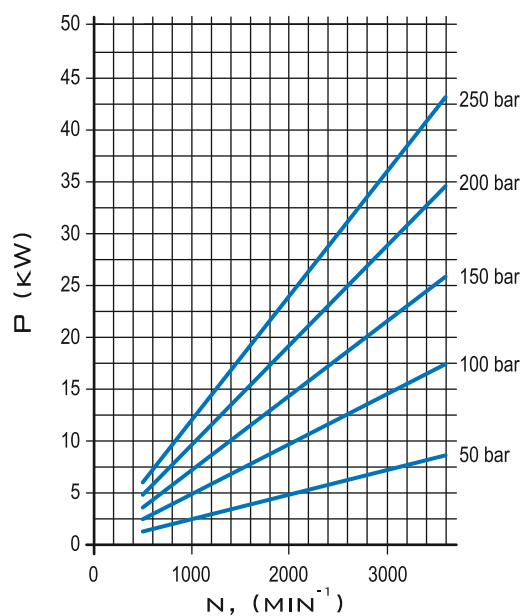





CHARACTERISTIC CURVES

CHARACTERISTIC CURVES CARRIED OUT WITH OIL VISCOSITY AT $16 \text{ mm}^2/\text{SEC}$ AND OIL TEMPERATURE AT 60°C .


MGP2.5K25

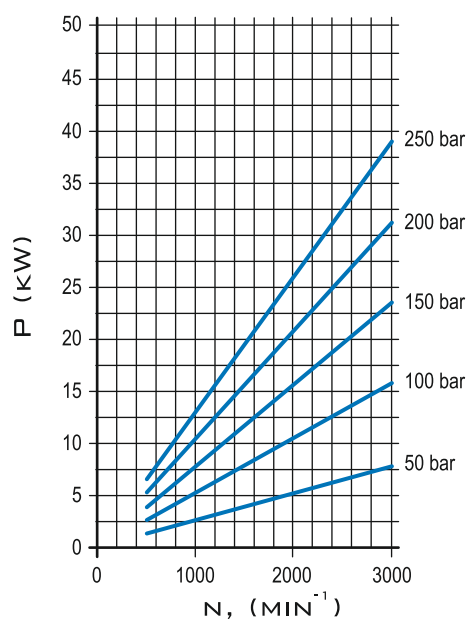


MGP2.5K28

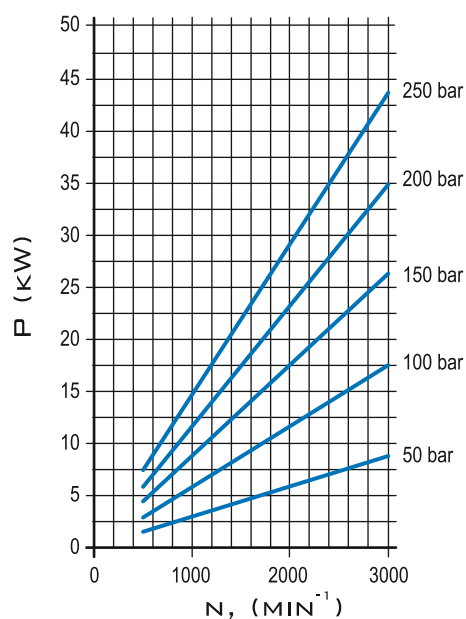

MGP2.5K30

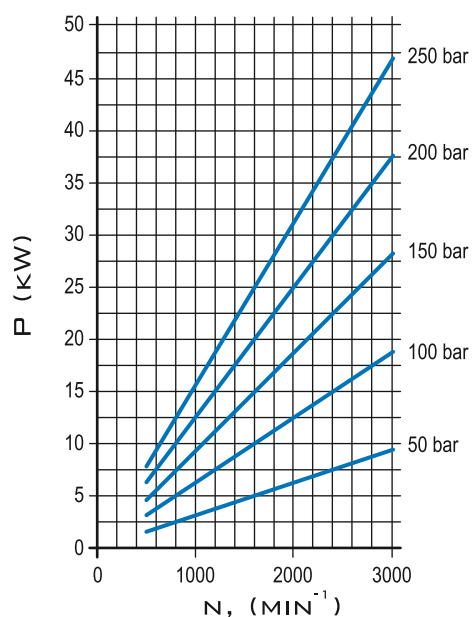


MGP2.5K32

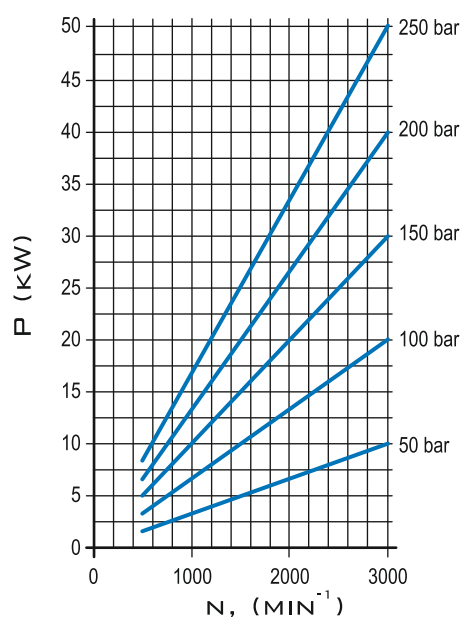


CHARACTERISTIC CURVES

CHARACTERISTIC CURVES CARRIED OUT WITH OIL VISCOSITY AT 16 MM²/SEC AND OIL TEMPERATURE AT 60 °C.


MGP2.5K36

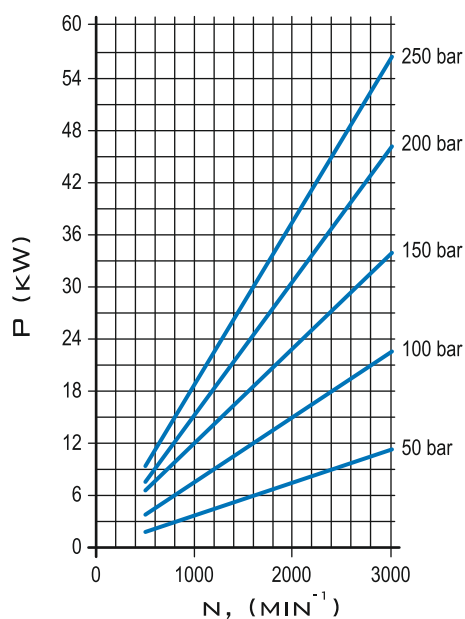


MGP2.5K37

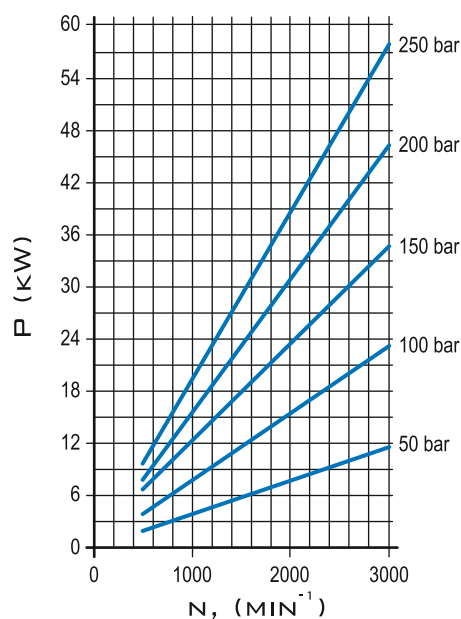


MGP2.5K38

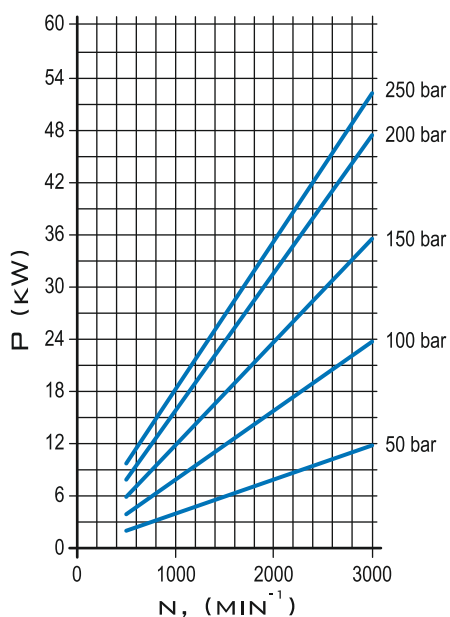

MGP2.5K40

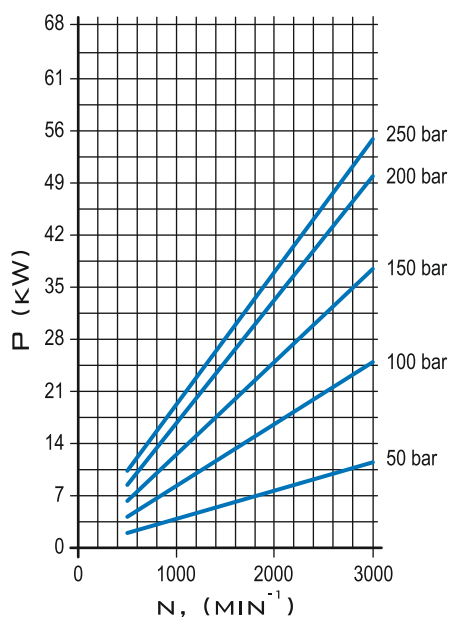

MGP2.5K45

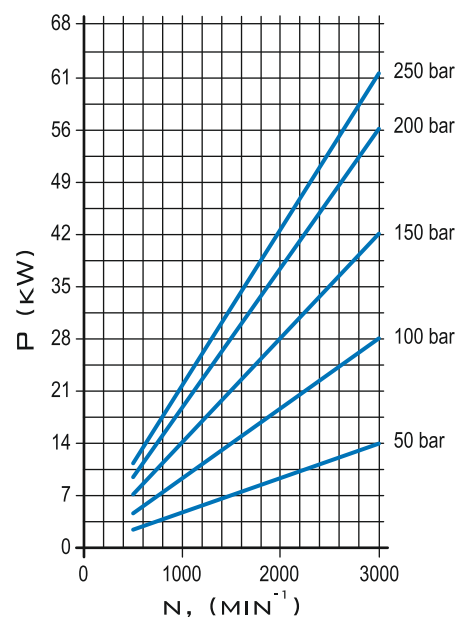


INSTRUCTIONS OF ROTATION CHANGING

PROCESS OF CHANGE DIRECTION SHOWN AT THE EXAMPLE FOR PUMP WITH CLOCKWISE ROTATION.


STEP 1

- UNSCREW AND REMOVE THE SCREWS COMPLETELY.
- PUT THE PUMP MOUNTING FLANGE UP.
- LUBRICATE THE DRIVE SHAFT WITH GREASE TO PREVENT DAMAGE TO THE SHAFT SEAL.

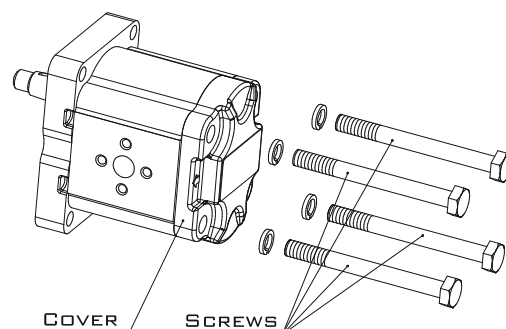


STEP 2

- REMOVE THE MOUNTING FLANGE.
- VERIFY THAT THE COMPENSATION SEAL IS CORRECTLY LOCATED IN THE BODY SEAT.

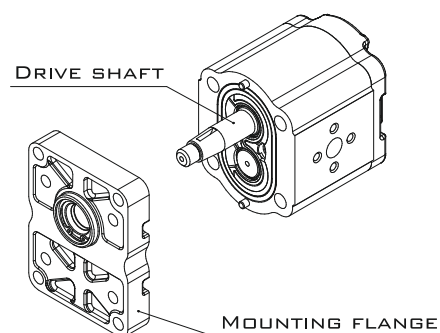

STEP 3

- MARK THE POSITION OF THE BEARING HOUSING (WITH MARKER) RELATIVE TO THE BODY.
- REMOVE THE BEARING HOUSING AND THE DRIVE SHAFT TAKING CARE TO AVOID DRIVEN SHAFT AXIAL SHIFTS.

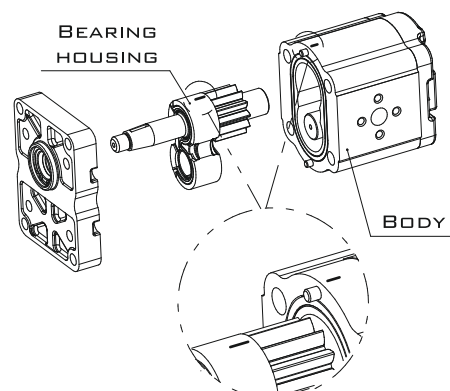


INSTRUCTIONS OF ROTATION CHANGING

PROCESS OF CHANGE DIRECTION SHOWN AT THE EXAMPLE FOR PUMP WITH CLOCKWISE ROTATION.


STEP 4

- DRAW OUT THE DRIVEN SHAFT FROM ITS HOUSING.
- RE-LOCATE THE DRIVEN SHAFT IN THE POSITION PREVIOUSLY OCCUPIED BY THE DRIVE SHAFT.

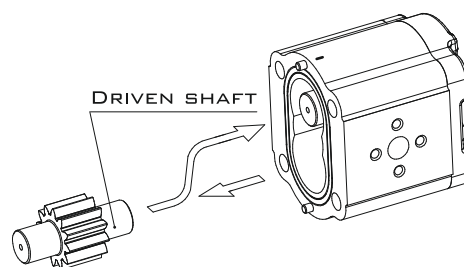


STEP 5

- RE-LOCATE THE DRIVE SHAFT IN THE POSITION PREVIOUSLY OCCUPIED BY THE DRIVEN SHAFT.

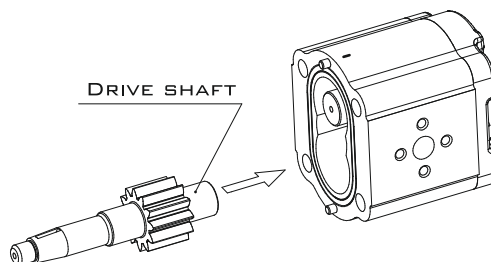


STEP 6

- REPLACE THE BEARING HOUSING TAKING CARE THAT:
- MARKS SHALL BE LOCATED AS IN THE PICTURE.
- COMPENSATION SEAL AND ANTI-EXTRUSION PLATE ARE CORRECTLY LOCATED.

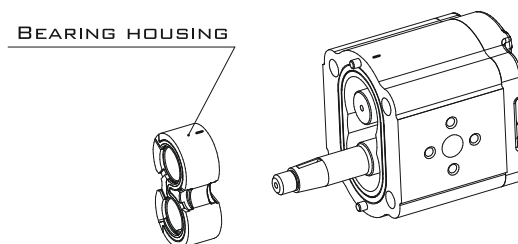

STEP 7

- CLEAN BODY AND MOUNTING FLANGE.
- REFIT THE MOUNTING FLANGE, TURNED 180° FROM ITS ORIGINAL POSITION.
- REPLACE THE CLAMP SCREWS AND TIGHTEN (TORQUE – SEE SECTION “TECHNICAL DATA”).
- CHECK THAT THE SHAFT ROTATES FREELY.

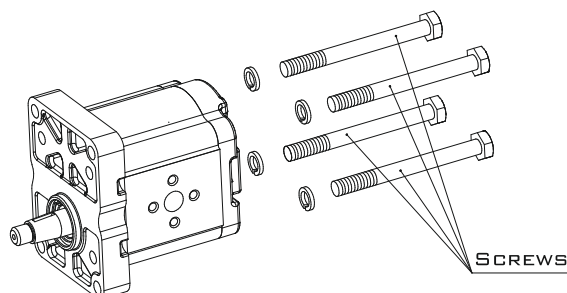



POMPE AD INGRANAGGI

MGP2.5

GEAR PUMPS
GROUP 2.5

ORDER CODE

MGP 2.5 K

GROUP 2.5

SERIES K

16 = 16 CM³/REV
19 = 19 CM³/REV
20 = 20 CM³/REV
23 = 23 CM³/REV
25 = 25 CM³/REV
28 = 28 CM³/REV
30 = 30 CM³/REV
32 = 32 CM³/REV
36 = 36 CM³/REV
37 = 37 CM³/REV
38 = 38 CM³/REV
40 = 40 CM³/REV
45 = 45 CM³/REV

R = CLOCKWISE ROTATION
L = COUNTERCLOCKWISE ROTATION

DRIVE SHAFTS:
B3 = SAE A SPLINED (10 TEETH)
B4 = SAE A SPLINED (11 TEETH)
B5 = SAE B SPLINED (13 TEETH)
G3 = EUROPEAN TAPERED 1:8
H3 = SAE B STRAIGHT Ø22,2

MATERIAL OF COVERS:
No CODE = ALUMINIUM
F = CAST IRON

No CODE = NBR SEALS
V = FKM SEALS

PORTS POSITION:
No CODE = SIDE INLET - SIDE OUTLET
1 = BACK INLET - BACK OUTLET

PORTS:
B = EUROPEAN FLANGE
C = GERMAN FLANGE
D = SAE FLANGE (UNC)
W = SAE A FLANGE (METRIC) - 4 BOLTS
E = METRIC THREADED
F = SAE THREADED
G = GAS THREADED (BSPP)

MOUNTING FLANGES:
31 = SAE A 2 BOLTS
33 = SAE B 2 BOLTS
63 = EUROPEAN