


**PA3020**

PA-400-SBR14-A-ZVG/US/ IV

Pressure sensors

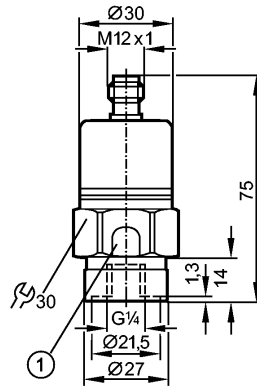

1: Pressure relief mechanism  
No mechanical force must be exerted on the pressure relief mechanism.



**Product characteristics**

Electronic pressure sensor
Quick disconnect
e1 compliant
Process connection: G ¼ I
Analog output
Measuring range: 0...400 bar

**Application**

Application	Type of pressure: relative pressure Liquids and gases Use in gases at pressures > 25 bar only after contacting the manufacturer ifm
Pressure rating [bar]	600
Bursting pressure min. [bar]	1000
Medium temperature [°C]	-25...90 ****)

**Electrical data**

Electrical design	DC
Operating voltage [V]	9.6...32 DC
Insulation resistance [MΩ]	> 100 (500 V DC)
Protection class	III
Reverse polarity protection	yes

**Outputs**

Output	Analog output
Output function	4...20 mA
Overload protection	yes
Max. load [Ω]	(U <sub>b</sub> - 9.6 V) x 50; 720 at U <sub>b</sub> = 24 V

**Measuring / setting range**

Measuring range [bar]	0...400
-----------------------	---------

**Accuracy / deviations**

Accuracy / deviations (in % of the span)	
Characteristics deviation *)	< ± 0.25 (BFSL) / < ± 0.5 (LS)
Repeatability **)	< 0.1
Long-term stability ***)	< ± 0.05

**PA3020**

PA-400-SBR14-A-ZVG/US/ IV

**Pressure sensors**

Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)

Greatest TEMPCO of the zero point	0.1
Greatest TEMPCO of the span	0.2

**Reaction times**

Step response time analogue output [ms]	3
---	---

**Environment**

Ambient temperature [°C]	-25...80
Storage temperature [°C]	-40...100
Protection	IP 68 / IP 69K

**Tests / approvals**

EMC	EN 61000-4-2 ESD: 4 kV CD / 8 kV AD EN 61000-4-3 HF radiated: 30 V/m EN 61000-4-4 Burst: 2 kV EN 61000-4-6 HF conducted: 10 V radiation of interference CISPR25 according to the automotive directive 2004/104/EC noise immunity according to the automotive directive 2004/104/EC ISO 11452-2 HF radiated: 100 V/m ISO 7637-2 pulse: severity level 4
Railway applications	DIN EN 50155 / IEC 60571 class T3, C1, S1
Shock resistance	DIN EN 60068-2-27 50 g (11 ms) DIN EN 61373: Category 3
Vibration resistance	DIN EN 60068-2-6 20 g (10...2000 Hz) DIN EN 61373: Category 2
MTTF [Years]	507


**Mechanical data**

Process connection	G ¼ I
Materials (wetted parts)	stainless steel (303S22); ceramics; FPM (Viton)
Housing materials	stainless steel 316L / 1.4404; FPM (Viton); PA; EPDM/X (Santoprene)
Min. pressure cycles	100 million
Weight [kg]	0.222

**Electrical connection**

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

**Wiring**



**Remarks**

Remarks	*) BFSL = Best Fit Straight Line / LS = Limit Value Setting **) with temperature fluctuations < 10 K ***) in % of value of measuring range / 6 months ****) -40...90 °C upon request
---------	---

Pack quantity [piece]	1
-----------------------	---



**PA3020**

PA-400-SBR14-A-ZVG/US/ /V

**Pressure sensors**