




PA3028

PA-,25BRBR14-A-ZVG/US/ IV



Pressure sensors

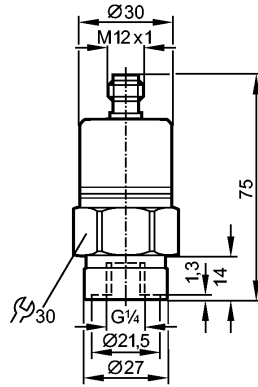

Product characteristics

Electronic pressure sensor

Quick disconnect

e1 compliant

Process connection: G 1/4 I

Analog output

Measuring range: 0...250 mbar

Application

Application	Type of pressure: relative pressure Liquids and gases
Pressure rating [mbar]	10000
Bursting pressure min. [mbar]	30000
Medium temperature [°C]	-25...90 ****)

Electrical data

Electrical design	DC
Operating voltage [V]	9.6...32 DC
Insulation resistance [MΩ]	> 100 (500 V DC)
Protection class	III
Reverse polarity protection	yes

Outputs

Output	Analog output
Output function	4...20 mA
Overload protection	yes
Max. load [Ω]	(U _b - 9.6 V) x 50; 720 at U _b = 24 V

Measuring / setting range

Measuring range [mbar]	0...250
------------------------	---------

Accuracy / deviations

Accuracy / deviations (in % of the span)	
Characteristics deviation *)	< ± 0.25 (BFSL) / < ± 0.5 (LS)
Repeatability **)	< 0.1
Long-term stability ***)	< ± 0.05
Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)	
Greatest TEMPCO of the zero point	0.2



PA3028

PA-,25BRBR14-A-ZVG/US/ IV



Pressure sensors

Greatest TEMPCO of the span	0.3
-----------------------------	-----

Reaction times

Step response time analogue output [ms]	3
---	---

Environment

Ambient temperature [°C]	-25...80
Storage temperature [°C]	-40...100
Protection	IP 68 / IP 69K

Tests / approvals

EMC	EN 61000-4-2 ESD: EN 61000-4-3 HF radiated: EN 61000-4-4 Burst: EN 61000-4-6 HF conducted: radiation of interference CISPR25 noise immunity ISO 11452-2 HF radiated: ISO 7637-2 pulse:	4 kV CD / 8 kV AD 30 V/m 2 kV 10 V according to the automotive directive 2004/104/EC according to the automotive directive 2004/104/EC 100 V/m severity level 4
Railway applications	DIN EN 50155 / IEC 60571	class T3, C1, S1
Shock resistance	DIN EN 60068-2-27 DIN EN 61373:	50 g (11 ms) Category 3
Vibration resistance	DIN EN 60068-2-6 DIN EN 61373:	20 g (10...2000 Hz) Category 2
MTTF [Years]		514


Mechanical data

Process connection	G ¼ I
Materials (wetted parts)	stainless steel (303S22); ceramics; FPM (Viton)
Housing materials	stainless steel 316L / 1.4404; FPM (Viton); PA; EPDM/X (Santoprene)
Min. pressure cycles	100 million
Weight [kg]	0.221

Electrical connection

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

Wiring



Remarks

Remarks	*) BFSL = Best Fit Straight Line / LS = Limit Value Setting **) with temperature fluctuations < 10 K ***) in % of value of measuring range / 6 months ****) -40...90 °C upon request
---------	---

Pack quantity [piece]	1
-----------------------	---