


PA3224

PA-010-RBN14-A-ZVG/US/ IV

Pressure sensors

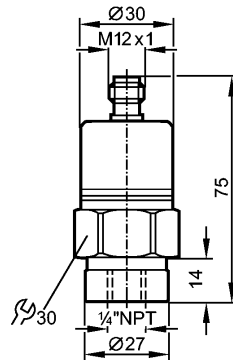

Product characteristics

Electronic pressure sensor

Quick disconnect

e1 compliant

Process connection: 1/4" NPT

Analog output

Measuring range: 0...10 bar / 0...145 psi

Application

Application	Type of pressure: relative pressure Liquids and gases	
Pressure rating	75 bar	1088 psi
Bursting pressure min.	150 bar	2175 psi
Medium temperature [°C]	-25...90 ****)	

Electrical data

Electrical design	DC	
Operating voltage [V]	9.6...32 DC 1)	
Insulation resistance [MΩ]	> 100 (500 V DC)	
Protection class	III	
Reverse polarity protection	yes	

Outputs

Output	Analog output	
Output function	4...20 mA	
Overload protection	yes	
Max. load [Ω]	(Ub - 9.6 V) x 50; 720 at Ub = 24 V	

Measuring / setting range

Measuring range	0...10 bar	0...145 psi
-----------------	------------	-------------

Accuracy / deviations

Accuracy / deviations (in % of the span)		
Characteristics deviation *)	< ± 0.25 (BFSL) / < ± 0.5 (LS)	
Repeatability **)	< 0.1	
Long-term stability ***)	< ± 0.05	
Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)		
Greatest TEMPCO of the zero point	0.1	

PA3224

PA-010-RBN14-A-ZVG/US/ IV

Pressure sensors

Greatest TEMPCO of the span	0.2
-----------------------------	-----

Reaction times

Step response time analogue output [ms]	3
---	---

Environment

Ambient temperature [°C]	-25...80
Storage temperature [°C]	-40...100
Protection	IP 65

Tests / approvals

EMC	EN 61000-4-2 ESD: EN 61000-4-3 HF radiated: EN 61000-4-4 Burst: EN 61000-4-6 HF conducted: radiation of interference CISPR25 noise immunity ISO 11452-2 HF radiated: ISO 7637-2 pulse:	4 kV CD / 8 kV AD 30 V/m 2 kV 10 V according to the automotive directive 2004/104/EC according to the automotive directive 2004/104/EC 100 V/m severity level 4
Railway applications	DIN EN 50155 / IEC 60571	class T3, C1, S1
Shock resistance	DIN EN 60068-2-27 DIN EN 61373:	50 g (11 ms) Category 3
Vibration resistance	DIN EN 60068-2-6 DIN EN 61373:	20 g (10...2000 Hz) Category 2
MTTF [Years]		506


Mechanical data

Process connection	1/4" NPT
Materials (wetted parts)	stainless steel (303S22); ceramics; FPM (Viton)
Housing materials	stainless steel 316L / 1.4404; FPM (Viton); PA; EPDM/X (Santoprene)
Min. pressure cycles	100 million
Weight [kg]	0.226

Electrical connection

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

Wiring



Remarks

Remarks	*) BFSL = Best Fit Straight Line / LS = Limit Value Setting **) with temperature fluctuations < 10 K ***) in % of value of measuring range / 6 months ****) -40...90 °C upon request
---------	---

Pack quantity [piece]	1
-----------------------	---