


**PA3521**

PA-250-SBG14-A-ZVG/US/ /V

Pressure sensors

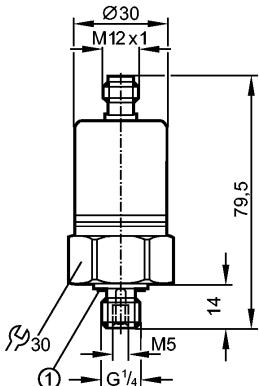

1: sealing FPM / DIN 3869-14

CE

**Product characteristics**

Electronic pressure sensor

Quick disconnect

e1 compliant

Process connection: G 1/4 A / M5 I

Analog output

Measuring range: 0...250 bar

**Application**

Application

Type of pressure: relative pressure

Liquids and gases

Use in gases at pressures &gt; 25 bar only after contacting the manufacturer ifm

Pressure rating [bar]

400

Bursting pressure min. [bar]

850

Medium temperature [°C]

-25...90 \*\*\*\*)

**Electrical data**

Electrical design

DC

Operating voltage [V]

9.6...32 DC

Insulation resistance [MΩ]

&gt; 100 (500 V DC)

Protection class

III

Reverse polarity protection

yes

**Outputs**

Output

Analog output

Output function

4...20 mA

Overload protection

yes

Max. load [Ω]

(Ub - 9.6 V) x 50; 720 at Ub = 24 V

**Measuring / setting range**

Measuring range [bar]

0...250

**Accuracy / deviations**Accuracy / deviations  
(in % of the span)

Characteristics deviation \*)

&lt; ± 0.25 (BFSL) / &lt; ± 0.5 (LS)

Repeatability \*\*)

&lt; 0.1

Long-term stability \*\*\*)

&lt; ± 0.05

**PA3521**

PA-250-SBG14-A-ZVG/US/ /V

Pressure sensors

Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)

Greatest TEMPCO of the zero point	< ± 0.1
Greatest TEMPCO of the span	< ± 0.2

**Reaction times**

Step response time analogue output	[ms]	3
------------------------------------	------	---

**Environment**

Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection		IP 68 / IP 69K

**Tests / approvals**

EMC	EN 61000-4-2 ESD: EN 61000-4-3 HF radiated: EN 61000-4-4 Burst: EN 61000-4-6 HF conducted:  radiation of interference CISPR25  noise immunity ISO 11452-2 HF radiated: ISO 7637-2 pulse:	4 kV CD / 8 kV AD 30 V/m 2 kV 10 V  according to the automotive directive 2004/104/EC  according to the automotive directive 2004/104/EC 100 V/m severity level 4
-----	--	--

Railway applications	DIN EN 50155 / IEC 60571	class T3, C1, S1
----------------------	--------------------------	------------------

Shock resistance	DIN EN 60068-2-27 DIN EN 61373:	50 g (11 ms) Category 3
------------------	------------------------------------	----------------------------

Vibration resistance	DIN EN 60068-2-6 DIN EN 61373:	20 g (10...2000 Hz) Category 2
----------------------	-----------------------------------	-----------------------------------

MTTF	[Years]	507
------	---------	-----


UL approval number		3007
--------------------	--	------

**Mechanical data**

Process connection	G 1/4 A / M5 I
Materials (wetted parts)	stainless steel (303S22); ceramics; sealing: FPM (Viton); according to DIN 3869-14
Housing materials	stainless steel 316L / 1.4404; FPM (Viton); PA; EPDM/X (Santoprene)
Min. pressure cycles	100 million
Weight	[kg]

**Electrical connection**

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

**Wiring****Remarks**

Remarks	*) BFSL = Best Fit Straight Line / LS = Limit Value Setting **) with temperature fluctuations < 10 K ***) in % of value of measuring range / 6 months ****) -40...90 °C upon request
---------	---

**PA3521**

PA-250-SBG14-A-ZVG/US/ /V

**Pressure sensors**

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — PA3521 — 17.12.2015