




# PA3522

PA-100-SBG14-A-ZVG/US/ IV



Pressure sensors

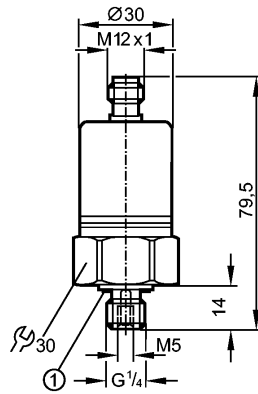

1: sealing FPM / DIN 3869-14



### Product characteristics

Electronic pressure sensor

Quick disconnect

e1 compliant

Process connection: G 1/4 A / M5 I

Analog output

Measuring range: 0...100 bar

### Application

Application	Type of pressure: relative pressure Liquids and gases Use in gases at pressures > 25 bar only after contacting the manufacturer ifm
Pressure rating [bar]	300
Bursting pressure min. [bar]	650
Medium temperature [°C]	-25...90 ****)

### Electrical data

Electrical design	DC
Operating voltage [V]	9.6...32 DC 1)
Insulation resistance [MΩ]	> 100 (500 V DC)
Protection class	III
Reverse polarity protection	yes

### Outputs

Output	Analog output
Output function	4...20 mA
Overload protection	yes
Max. load [Ω]	(U <sub>b</sub> - 9.6 V) x 50; 720 at U <sub>b</sub> = 24 V

### Measuring / setting range

Measuring range [bar]	0...100
-----------------------	---------

### Accuracy / deviations

Accuracy / deviations (in % of the span)	
Characteristics deviation *)	< ± 0.25 (BFSL) / < ± 0.5 (LS)
Repeatability **)	< 0.1
Long-term stability ***)	< ± 0.05



# PA3522

PA-100-SBG14-A-ZVG/US/ IV



Pressure sensors

Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)

Greatest TEMPCO of the zero point	< ± 0.1
Greatest TEMPCO of the span	< ± 0.2

### Reaction times

Step response time analogue output [ms]	3
---	---

### Environment

Ambient temperature [°C]	-25...80
Storage temperature [°C]	-40...100
Protection	IP 68 / IP 69K

### Tests / approvals

EMC	EN 61000-4-2 ESD: 4 kV CD / 8 kV AD EN 61000-4-3 HF radiated: 30 V/m EN 61000-4-4 Burst: 2 kV EN 61000-4-6 HF conducted: 10 V radiation of interference CISPR25 according to the automotive directive 2004/104/EC noise immunity according to the automotive directive 2004/104/EC ISO 11452-2 HF radiated: 100 V/m ISO 7637-2 pulse: severity level 4
Railway applications	DIN EN 50155 / IEC 60571 class T3, C1, S1
Shock resistance	DIN EN 60068-2-27 50 g (11 ms) DIN EN 61373: Category 3
Vibration resistance	DIN EN 60068-2-6 20 g (10...2000 Hz) DIN EN 61373: Category 2
MTTF [Years]	507


### Mechanical data

Process connection	G ¼ A / M5 I
Materials (wetted parts)	stainless steel (303S22); ceramics; sealing: FPM (Viton); according to DIN 3869-14
Housing materials	stainless steel 316L / 1.4404; FPM (Viton); PA; EPDM/X (Santoprene)
Min. pressure cycles	100 million
Weight [kg]	0.219

### Electrical connection

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

### Wiring



### Remarks

Remarks	*) BFSL = Best Fit Straight Line / LS = Limit Value Setting **) with temperature fluctuations < 10 K ***) in % of value of measuring range / 6 months ****) -40...90 °C upon request
---------	---

Pack quantity [piece]	1
-----------------------	---



# PA3522

PA-100-SBG14-A-ZVG/US/ IV



**Pressure sensors**