


**PA3523**

PA-025-RBG14-A-ZVG/US / V

Pressure sensors

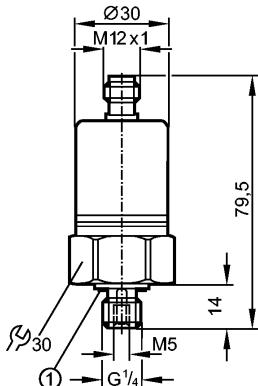

1: sealing FPM / DIN 3869-14

Product characteristics

Electronic pressure sensor

Quick disconnect

e1 compliant

Process connection: G 1/4 A / M5 I

Analog output

Measuring range: 0...25 bar

Application

Application

Type of pressure: relative pressure
Liquids and gases

Pressure rating [bar]

150

Bursting pressure min. [bar]

350

Medium temperature [°C]

-25...90 ****)

Electrical data

Electrical design

DC

Operating voltage [V]

9.6..32 DC¹⁾

Insulation resistance [MΩ]

> 100 (500 V DC)

Protection class

III

Reverse polarity protection

yes

Outputs

Output

Analog output

Output function

4...20 mA

Overload protection

yes

Max. load [Ω]

(Ub - 9.6 V) x 50; 720 at Ub = 24 V

Measuring / setting range

Measuring range [bar]

0...25

Accuracy / deviationsAccuracy / deviations
(in % of the span)

< ± 0.25 (BFSL) / < ± 0.5 (LS)

Characteristics deviation *)

< 0.1

Repeatability **)

< ± 0.05

Long-term stability ***)

Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)

PA3523

PA-025-RBG14-A-ZVG/US/ /V

Pressure sensors

Greatest TEMPCO of the zero point	< ± 0.1
Greatest TEMPCO of the span	< ± 0.2
Reaction times	
Step response time analogue output	[ms] 3
Environment	
Ambient temperature	[°C] -25...80
Storage temperature	[°C] -40...100
Protection	IP 65
Tests / approvals	
EMC	EN 61000-4-2 ESD: 4 kV CD / 8 kV AD EN 61000-4-3 HF radiated: 30 V/m EN 61000-4-4 Burst: 2 kV EN 61000-4-6 HF conducted: 10 V radiation of interference CISPR25 according to the automotive directive 2004/104/EC noise immunity according to the automotive directive 2004/104/EC ISO 11452-2 HF radiated: 100 V/m ISO 7637-2 pulse: severity level 4
Railway applications	DIN EN 50155 / IEC 60571 class T3, C1, S1
Shock resistance	DIN EN 60068-2-27 50 g (11 ms) DIN EN 61373: Category 3
Vibration resistance	DIN EN 60068-2-6 20 g (10...2000 Hz) DIN EN 61373: Category 2
MTTF	[Years] 506
Mechanical data	
Process connection	G 1/4 A / M5 I
Materials (wetted parts)	stainless steel (303S22); ceramics; sealing: FPM (Viton); according to DIN 3869-14
Housing materials	stainless steel 316L / 1.4404; FPM (Viton); PA; EPDM/X (Santoprene)
Min. pressure cycles	100 million
Weight	[kg] 0.218
Electrical connection	
Connection	M12 connector; gold-plated contacts
Wiring	
2 1 3 4	
Remarks	
Remarks	*) BFSL = Best Fit Straight Line / LS = Limit Value Setting **) with temperature fluctuations < 10 K ***) in % of value of measuring range / 6 months ****) -40...90 °C upon request
Pack quantity	[piece] 1