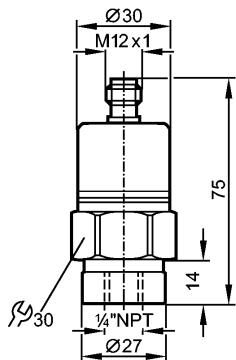


**PA6229**

PA-0-1-RBN14-A-ZVG/US/ /V

Pressure sensors

**Product characteristics**

Electronic pressure sensor

Quick disconnect

e1 compliant

Process connection: 1/4" NPT

Analog output

Measuring range: -1...0 bar

Application

Application	Type of pressure: relative pressure Liquids and gases
Pressure rating [bar]	10
Bursting pressure min. [bar]	30
Medium temperature [°C]	-25...90 ****)

Electrical data

Electrical design	DC
Operating voltage [V]	9.6...32 DC ¹⁾
Insulation resistance [MΩ]	> 100 (500 V DC)
Protection class	III
Reverse polarity protection	yes

Outputs

Output	Analog output
Output function	20...4 mA analog
Overload protection	yes
Analog output	20...4 mA
Max. load [Ω]	max. (Ub - 9.6 V) x 50; 720 at Ub = 24 V

Measuring / setting range

Measuring range [bar]	-1...0
-----------------------	--------

Accuracy / deviations

Accuracy / deviations (in % of the span)	
Characteristics deviation *	< ± 0.25 (BFSL) / < ± 0.5 (LS)
Repeatability **)	< 0.1
Long-term stability ***)	< ± 0.05

Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)

**PA6229**

PA-0-1-RBN14-A-ZVG/US/ /V

Pressure sensors

Greatest TEMPCO of the zero point		0.1
Greatest TEMPCO of the span		0.2
Reaction times		
Step response time analogue output	[ms]	3
Environment		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection		IP 65
Tests / approvals		
EMC		EN 61000-4-2 ESD: 4 kV CD / 8 kV AD EN 61000-4-3 HF radiated: 30 V/m EN 61000-4-4 Burst: 2 kV EN 61000-4-6 HF conducted: 10 V according to the automotive directive 2004/104/EC / CISPR25 radiation of interference according to the automotive directive 2004/104/EC / ISO 11452-2 noise immunity 100 V/m HF radiated according to ISO7637-2 / severity level 3 pulse resistance
Shock resistance		DIN IEC 68-2-27: 50 g (11 ms)
Vibration resistance		DIN IEC 68-2-6: 20 g (10...2000 Hz)
MTTF	[Years]	506
Mechanical data		
Process connection		1/4" NPT
Materials (wetted parts)		stainless steel (303S22); ceramics; FPM (Viton)
Housing materials		stainless steel 316L / 1.4404; FPM (Viton); PA; EPDM/X (Santoprene)
Min. pressure cycles		100 million
Weight	[kg]	0.22
Electrical connection		
Connection		M12 connector; gold-plated contacts
Wiring		
2 1 3 4		
Remarks		
Remarks		*) BFSL = Best Fit Straight Line / LS = Limit Value Setting **) with temperature fluctuations < 10 K ***) in % of value of measuring range / 6 months ****) -40...90 °C upon request
Pack quantity	[piece]	1