




PF2956

PF-2.5-REB34-MFRKG/US/ /P



Pressure sensors

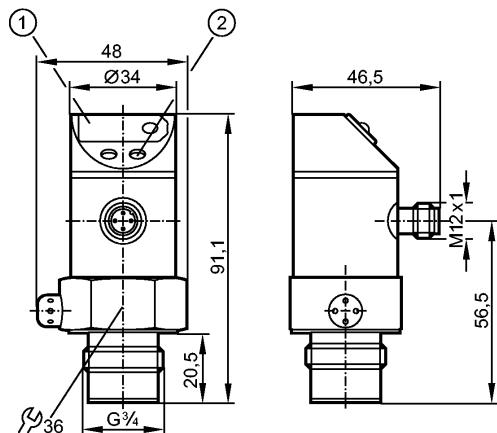

1: 7-segment LED display

2: Programming button



Product characteristics

Combined pressure sensor

Quick disconnect

no dead space

Freely rotatable housing 350°

Zero and span adjustable

Function programmable

Process connection: G 3/4 A

2 outputs

OUT1 = switching output

OUT2 = switching output or analog output

7-segment LED display

Measuring range: -0.13...2.50 bar / -1.8...36.3 psi / -13...250 kPa

Application

Application

Type of pressure: relative pressure
Hygienic systems, viscous media and liquids with suspended particles
Liquids and gases

Pressure rating

20 bar

290 psi

2000 kPa

Bursting pressure min.

50 bar

725 psi

5000 kPa

Medium temperature

[°C]

-25...80

Electrical data

Electrical design

DC PNP/NPN

Operating voltage

[V]

20...30 DC

Current consumption

[mA]

< 60

Insulation resistance

[MΩ]

> 100 (500 V DC)

Protection class

III

Reverse polarity protection

yes

Outputs

Output

2 outputs

OUT1 = switching output

OUT2 = switching output or analog output

Output function

2 x normally open / closed programmable or 1 x normally open / closed programmable
+ 1 x analog (4...20 mA / 0...10 V; programmable 1:4)



PF2956

PF-2.5-REB34-MFRKG/US/ /P

Pressure sensors

Current rating	[mA]	2 x 250
Voltage drop	[V]	< 2
Short-circuit protection		yes (non-latching)
Overload protection		yes
Switching frequency	[Hz]	≤ 170
Analog output		4...20 mA / 0...10 V
Max. load	[Ω]	4...20 mA: max. (Ub - 10 V) x 50 / 0...10 V: min. 2000

Measuring / setting range

Display unit	bar, psi, kPa		
Measuring range	-0.13...2.50 bar	-1.8...36.3 psi	-13...250 kPa
Setting range			
Set point, SP	-0.11... 2.50 bar	-1.6...36.3 psi	-11...250 kPa
Reset point, rP	-0.12 ... 2.49 bar	-1.7...36.2 psi	-12...249 kPa
Analog start point, ASP	-0.13...1.88 bar	-1.8...27.2 psi	-13...188 kPa
Analog end point, AEP	0.50...2.50 bar	7.3...36.3 psi	50...250 kPa
in steps of	0.01 bar	0.1 psi	1 kPa
Factory setting	SP1 = 0.63 bar; rP1 = 0.58 bar ASP = 0.00 bar; AEP = 2.50 bar		

Accuracy / deviations

Accuracy / deviations (in % of the span) Turn down 1:1		
Characteristics deviation *)	< ± 0.6	
Linearity	< ± 0.5	
Hysteresis	< ± 0.1	
Repeatability **)	< ± 0.1	
Long-term stability ***)	< ± 0.1	
Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)		
Greatest TEMPCO of the zero point	< ± 0.1	
Greatest TEMPCO of the span	< ± 0.2	

Reaction times

Power-on delay time	[s]	0.2
Min. response time switching output	[ms]	3
Damping for the switching output (dAP)	[s]	0...4
Damping for the analog output (dAA)	[s]	0 - 0.1 - 0.5 - 2
Response time analog output	[ms]	3
Integrated watchdog		yes

Software / programming

Programming options	hysteresis / window function; N.O. / N.C; output polarity; current / voltage outputs; damping; calibration of displayed values; display can be rotated / deactivated; display unit	
---------------------	--	--

Environment

Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection		IP 67



PF2956

PF-2.5-REB34-MFRKG/US/ /P



Pressure sensors

Tests / approvals

EMC		EN 61000-4-2 ESD: EN 61000-4-3 HF radiated: EN 61000-4-4 Burst: EN 61000-4-6 HF conducted:	4 kV CD / 8 kV AD 10 V/m 2 kV 10 V
Shock resistance		DIN IEC 68-2-27:	50 g (11 ms)
Vibration resistance		DIN IEC 68-2-6:	20 g (10...2000 Hz)
MTTF	[Years]		170

Mechanical data

Process connection	G ¾ A
Materials (wetted parts)	ceramics (99.9 % Al ₂ O ₃); PTFE; FPM (Viton); stainless steel 316L / 1.4435; surface characteristics: Ra < 0.4 / Rz 4
Housing materials	stainless steel 316L / 1.4404; PBT (Pocan); PC (Makrolon); PEI; EPDM/X (Santoprene); FPM (Viton)
Switching cycles min.	100 million
Weight [kg]	0.304

Displays / operating elements

Display	Switching status 2 x LED red Function display 7-segment LED display Measured values 7-segment LED display
---------	---

Electrical connection

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

Wiring

Programming of the output function (OUT1 / OUT2):

Hno = hysteresis / normally open



Hnc = hysteresis / normally closed

Fno = window function / normally open

Fnc = window function / normally closed

Complementary outputs:



output 1: = Hno, output 2: = Hnc
(with the same SP / rP)



Programming of the analog output (OUT2):

I = current output (4...20 mA)

U = voltage output (0...10 V)



Remarks

Remarks	*) linearity, incl. hysteresis and repeatability; (limit value setting to DIN 16086) **) with temperature fluctuations < 10 K ***) in % of the span per year
---------	---

Pack quantity	[piece]	1
---------------	---------	---