




# PK6524

PK-010-RFG14-HCPKG/US/ /W



Pressure sensors

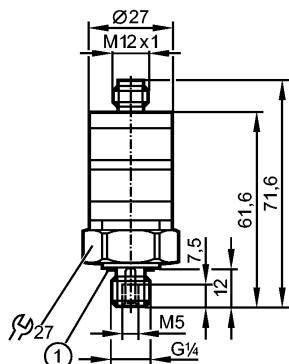

1: sealing FPM / DIN 3869-14

LISTED

## Product characteristics

Electronic pressure monitor

Quick disconnect

Process connection: G 1/4 A / M5 I

2 switching outputs  
normally open / closed complementary

Measuring range: 0...10 bar / 0...145 psi

## Application

Application	Type of pressure: relative pressure Liquids and gases
Pressure rating	25 bar
Bursting pressure min.	300 bar
MAWP (for applications according to CRN)	25 bar
Medium temperature [°C]	-25...80

## Electrical data

Electrical design	DC PNP
Operating voltage [V]	9.6...32 DC
Current consumption [mA]	< 25
Insulation resistance [MΩ]	> 100 (500 V DC)
Protection class	III
Reverse polarity protection	yes

## Outputs

Output	2 switching outputs normally open / closed complementary
Output function	complementary
Current rating [mA]	500
Voltage drop [V]	< 2
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	100

## Measuring / setting range

Measuring range	0...10 bar	0...145 psi
Setting range		
Set point, SP	0.5...10 bar	7.5...145 psi



# PK6524

PK-010-RFG14-HCPKG/US/ /W



Pressure sensors

Reset point, rP	0.3...9.8 bar	5.0...142 psi
-----------------	---------------	---------------

## Accuracy / deviations

Deviations (% of value of measuring range)	
Switch point accuracy	< ± 2.5 *)
Characteristics deviation	< ± 1.5 (BFSL) / < ± 2.5 (LS) **)
Repeatability	< ± 0.5
Temperature drift ( / 10 K)	< ± 0.5
in the temperature range [°C]	0...80

## Software / programming

Adjustment of the switch point	Setting rings
--------------------------------	---------------

## Environment

Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection		IP 67

## Tests / approvals

Pressure equipment directive	article 3, section 3 - sound engineering practice	
EMC	DIN EN 61000-6-2	DIN EN 61000-6-3
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[Years]	540

## Mechanical data

Process connection	G 1/4 A / M5 I	
Materials (wetted parts)	stainless steel 316L / 1.4404; FPM	
Housing materials	PBT; PC; FPM; stainless steel 316L / 1.4404	
Switching cycles min.	50 million	
Tightening torque	[Nm]	25
Weight	[kg]	0.093


## Displays / operating elements

Display	Power LED green
	Switching status LED yellow

## Electrical connection

Connection	M12 connector
------------	---------------

## Wiring

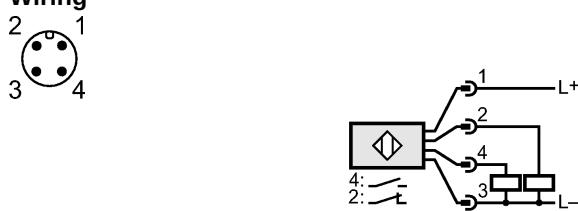

## Remarks

Remarks	*) Setting accuracy **) BFSL = Best Fit Straight Line / LS = Limit Value Setting
---------	---

Pack quantity	[piece]	1
---------------	---------	---