

PMV0

VARIABLE DISPLACEMENT PUMP CLOSED LOOP CIRCUIT



T E C H N I C A L C A T A L O G



OVERVIEW


PMV0 is a variable displacement, axial piston pump, with swashplate system, for closed loop hydrostatic transmissions.

It provides a continuously variable flow rate between zero and maximum in forward and reverse directions. Flow rate is proportional to rotation speed and swashplate angle.

It can feature a charge pump to keep the circuit pressurised. This avoids risk of cavitation and ensures a good transmission performance. It offers two types of control: direct-mechanical and servo-hydraulic.

It is equipped with high-pressure relief valves and can be delivered with auxiliary gear pumps. It is available in single or tandem versions.

As options, PMV0 can be featured with flushing valve, filter on charge pressure line and safety devices to ensure safe operation of the machine.

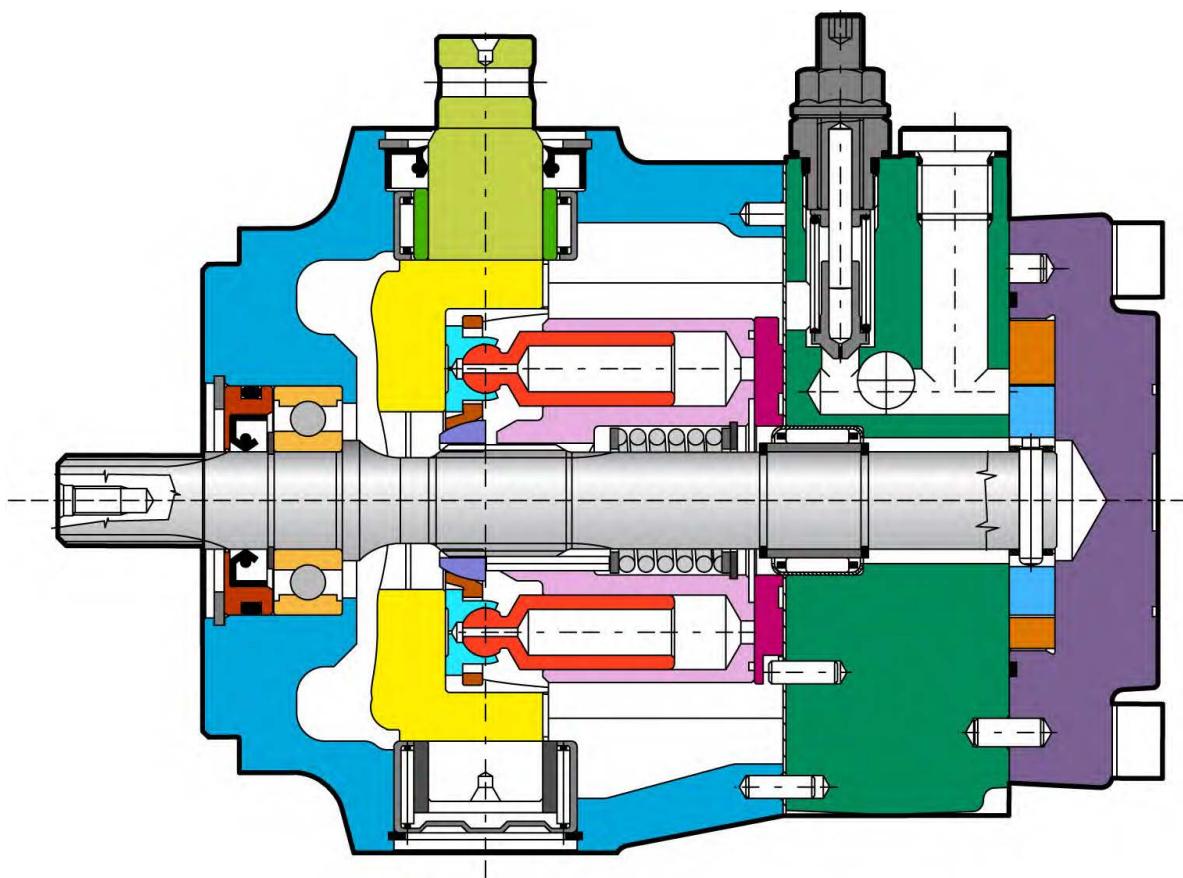

		PMV0-07	PMV0-09	PMV0-11	PMV0-14	PMV0-18
Displacement	cm ³ /rev [in ³ /rev.]	7,08 [0.43]	9,08 [0.55]	11,83 [0.72]	14,32 [0.87]	17,85 [1.09]
Theoretical Flow at rated speed	L/min [GPM]	25,5 [6.74]	32,7 [8.64]	42,6 [11.25]	51,6 [13.63]	64,3 [16.99]
Rated speed	rpm			3 600		
Rated pressure	bar [PSI]			210 [3 045]		
Max. Pressure	bar [PSI]			300 [4 351]		
Mounting flange				SAE A		
Controls				Direct mechanical and servo hydraulic		
Mass	kg [lb]			From 7,5 [16.5] to 9,5 [20.9]		
Rotation				Clockwise or Counterclockwise		





OPTIONS

	36
Screw by-pass	36
Lever by-pass	37
Electrical by-pass with brake engaged	38
Roller bearing	39
Fluorinated elastomer seals	39
UNF threads ports	39
Low noise valve plate	39
Filter on suction line	40
Filter on pressure line	41
Swashplate on bushing	42
Flushing valve	42
Finishing coat	43
Customized identification plate	43
Setting max. displacement	43
Pressure gauge ports on relief valve	43
Ball bearing	44
Fitting for rear power take off	44
Special execution	44
Auxiliary function	45
Twin ports	45



CONTENT

MODEL CODE	6
TECHNICAL SPECIFICATIONS	8
Features	8
Main dimensions	9
Port characteristics	9
OPERATING PARAMETERS	11
Operating parameters	11
Charge pressure	11
Case pressure	11
Pressure ratings	11
Speed ratings	11
Inlet pressure	12
Theoretical output	12
Poclain Hydraulics recommendations for fluid	12
Fluid and filtration	13
Viscosity range	13
SYSTEM DESIGN PARAMETERS	14
Sizing equations	14
Redundant braking system requirement	14
Loop flushing	14
Reservoir	15
Case drain usage for tandem pump	15
Differential pressure	15
Bearing life and external shaft loading	16
Hydraulic unit life	17
Mounting flange loads	17
FEATURES	18
High pressure relief valve	18
Charge relief valve	19
Charge pump	20
Displacement limiters	21
By-pass	21
Mounting flange and shafts	22
Auxiliary mounting pad	24
Tandem pumps	26
Gear pumps	27
CONTROLS	28
Direct mechanical control	28
Direct mechanical control with return spring	30
Direct mechanical control with return spring and zero position setting	32
Hydraulic servo control	34

Model Code

Technical specifications

Operating Parameters

System design Parameters


Features

Controls

Options



MODEL

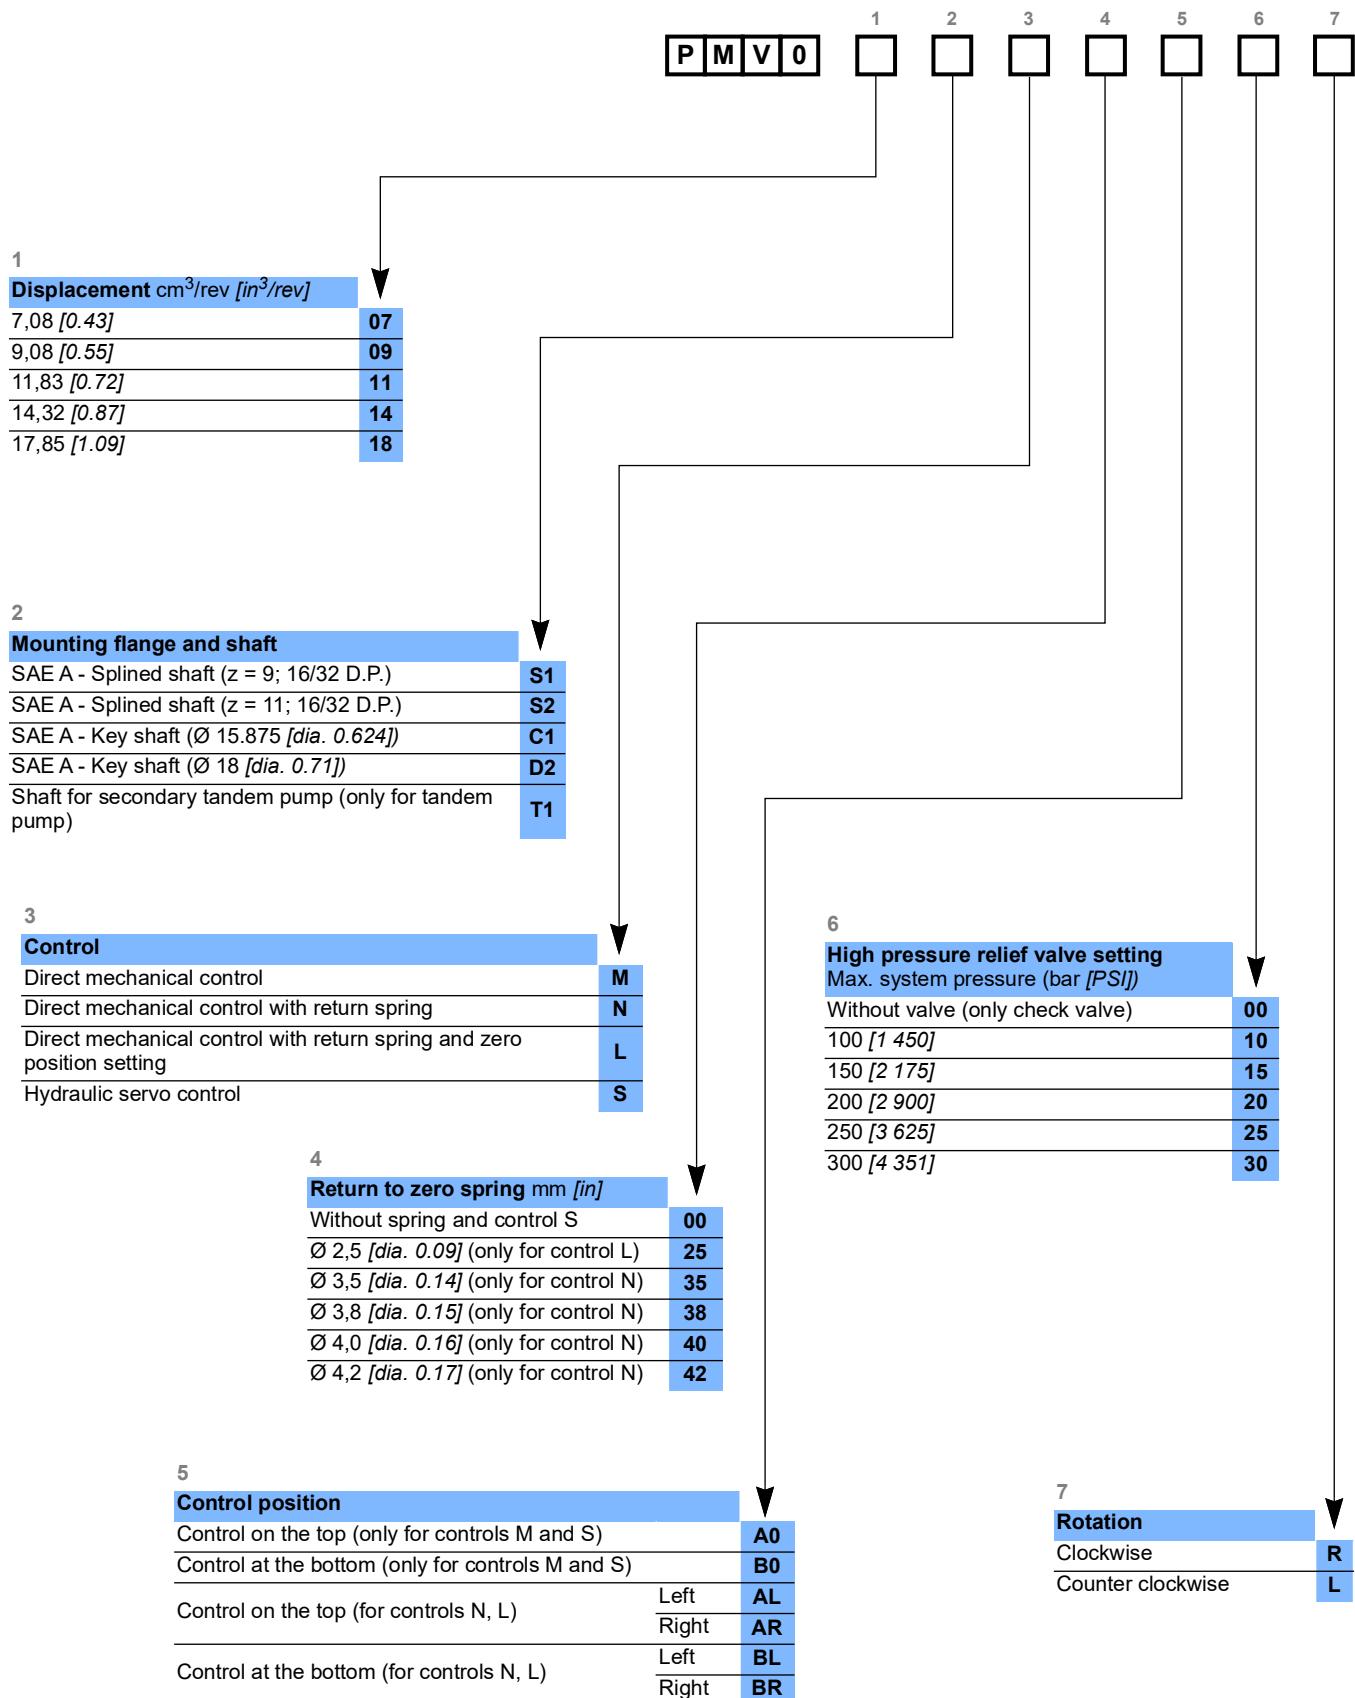



CODE

8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	
8	9	10	11	12	



TECHNICAL SPECIFICATIONS


Features

		PMV0-07	PMV0-09	PMV0-11	PMV0-14	PMV0-18
Displacement	cm ³ /rev [in ³ /rev.]	7,08 [0.43]	9,08 [0.55]	11,83 [0.72]	14,32 [0.87]	17,85 [1.09]
Theoretical flow at rated speed (3600 rpm)	L/min [GPM]	25,5 [6.74]	32,7 [8.64]	42,6 [11.25]	51,6 [13.63]	64,3 [16.99]
Max. Theoretical absorbed power	KW	12,7	16,3	21,3	25,8	30,5
Theoretical absorbed torque at 100 bar [1 450 PSI]	N.m [in.lbf]	11,3 [100]	14,5 [128]	18,8 [166]	22,8 [202]	28,4 [251]
Moment of inertia	kg.m ² [slug.ft ²]			0,0014 [0.0010]		
Internal charge pump	cm ³ /rev [in ³ /rev.]			4,9 [0.30]		
Charge relief valve setting	bar [PSI]			From 6 [87] to 30 [435]		
High pressure relief setting	bar [PSI]			Max. 300 [4 351]		
Mounting flange				SAE A		
Mass	kg [lb]			7,5 [16.5] with control M		
				9,5 [20.9] with control S		




Main dimensions


PMV0 with direct mechanical control and without auxiliary mounting pad

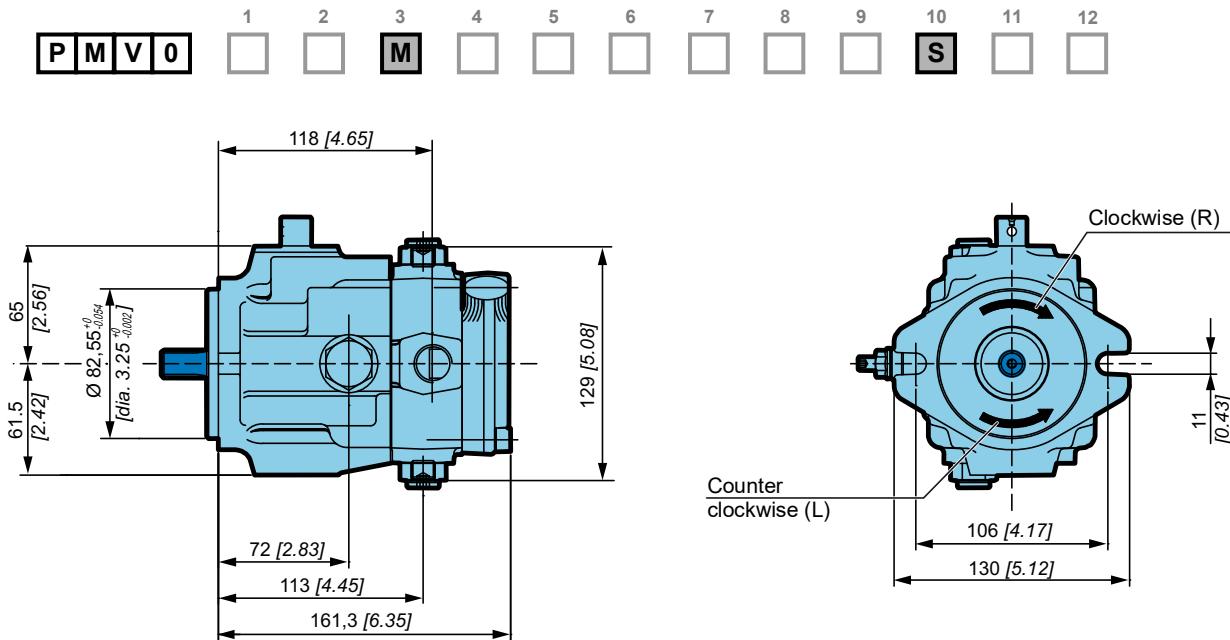

See from page 28 to page 31
for control dimensions.

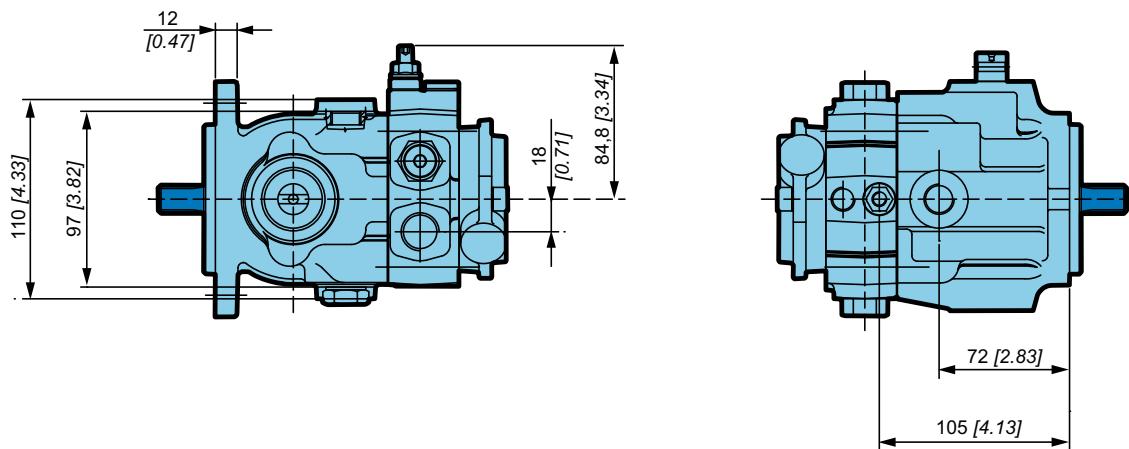

Port characteristics

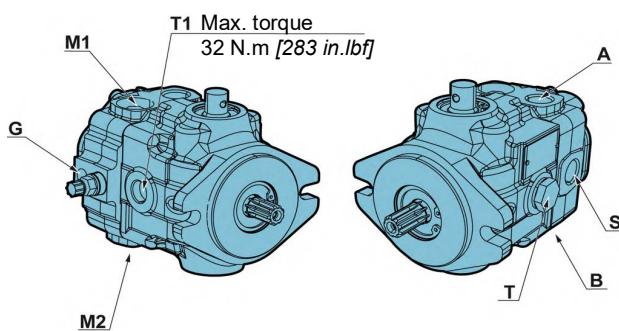

Port	Function	ISO 1179-1 (standard)	ISO 11926-1 (option FU)
A-B	Services	1/2" GAS	3/4-16 UNF-2B
G	Auxiliary	1/4" GAS	7/16-20 UNF-2B
M1/M2	Gauge	1/8" GAS	-
S	Suction	1/2" GAS	3/4-16 UNF-2B
T/T1	Drain	3/8" GAS	3/4-16 UNF-2B

Model
Code

Technical
specifications

Operating
Parameters

System design
Parameters

Features

Controls

Options





OPERATING PARAMETERS

Operating parameters

		PMV0-07	PMV0-09	PMV0-11	PMV0-14	PMV0-18
Speed ratings	Minimum			700		
	Max. without load	rpm		3 900		
	Max. with load			3 600		
System pressure	Rated			210 [3 045]		
	Maximum	bar [PSI]		300 [4 351]		
	Minimum low loop			6 [87]		
Inlet pressure	Mini continuous	bar abs. [PSI abs.]		0,8 [11,6]		
	Mini (cold start)			0,5 [7,2]		
Case pressure	Continuous	bar [PSI]		1,5 [21,7]		
	Maximum (cold start)			2,5 [36,2]		
Charge pressure	Standard version			20 [290]		
	Max. charge pressure	bar [PSI]		30 [435]		
Servo case pressure	Maximum	bar [PSI]		30 [435]		

Charge pressure

A charge flow is required to maintain a positive pressure in the low pressure loop of a closed loop hydrostatic transmission. Charge pressure ensures proper lubrication and rotating group operation. It is recommended to maintain the charge pressure at a minimum of 6 bar [87 psi] above case pressure. In case of direct mechanical control (M), charge pressure must be set at 10 bar [145 PSI] mini. In case of servo control (S), charge pressure must be set at 20 bar [290 PSI]. For more details, refer to charge pump paragraph, page 20.

Case pressure

Case pressure must be maintained within the limits shown in the table "Operating parameters". Ensure housing is always filled with hydraulic fluid and especially during start-up of the machine.

Pressure ratings

Maximum peak pressure

It is the maximum allowable pressure. It is equivalent to the maximum setting of the maximum high pressure relief valve. A self-propelled machine can reach the maximum peak pressure value no more than 1-2% of that work cycle.

Work cycle

A fundamental factor for ensuring correct hydrostatic transmission sizing is the machine work cycle (pressure-time ratio, seasonality, pressure vs. percentage of time at max. displacement, machine type). Part service life depends on the correct choice in relation to the work cycle.

Overloads

It is mandatory to protect parts against any possible overloads.

Speed ratings

The table "Operating parameters" gives minimum and maximum rated speeds. Note that all displacements might operate under different speed limits. Definitions of these speed limits appear below.

Maximum speed is the highest operating speed allowed. Over speeding reduces pump life time, can lead to loss of hydrostatic power and braking capacity. Never exceed the maximum speed limit under any operating conditions.

Nominal speed is the speed offering the maximal efficiency.

Model Code

Technical specifications

Operating Parameters

System design Parameters

Features

Controls

Options



Inlet pressure

Charge pump inlet pressure is key for acceptable pump life and performances. A continuous inlet pressure of not less than 0,8 bar abs. [11.6 PSI abs.] is recommended. An continuous inlet pressure less than 0.5 bar abs. [7.2 PSI abs.] indicates inadequate inlet design or a restricted filter. Pressures less than 0.5 bar abs. [7.2 PSI abs.] can happen at cold start, but should increase with oil temperature.

Theoretical output

Theoretical output flow is a function of pump displacement and speed. It is relevant to size the rest of the circuit. Theoretical flow does not take into account losses due to leakage or variations in displacement. Refer to performances, page 6, for volumetric and overall efficiencies at various operating speeds and pressures.

Poclain Hydraulics recommendations for fluid

Poclain hydraulics recommends the use of hydraulic fluids defined by the ISO 15380 and ISO 6743-4 standards. For temperate climates, the following types are recommended.

- HM 46 or HM 68 for fixed installations.
- HV 46 or HV 68 for mobile installations.
- HEES 46 for mobile installations.



These specifications correspond to category 91H of the CETOP standard, parts 1, 2 and 3 of the DIN 51524 standard, and grades VG32, VG 46 and VG68 of the ISO 6743-4 standards.



It is also possible to use ATF, HD, HFB, HFC or HFD type hydraulic fluid upon Poclain Hydraulics specific approval of the components' operating conditions.

Standardized designations for the fluids

- **HM** : Mineral fluids having specific antioxidant, anticorrosion and antiwear properties (HLP equivalent to DIN 51524 parts 1 and 2).
- **HV** : HM mineral fluids providing improved temperature and viscosity properties (DIN 51524 part 3).
- **HEES** : Biodegradable fluids based on organic esters.

It is also possible to use a fluid that meets the biodegradability criteria and is compatible in the event of accidental food contact. The BIOHYDRAN FG 46 fluid designed by the company Total has undergone testing of its properties and performance on our test benches. Since this type of fluid has not yet been categorized, it is the responsibility of machine manufacturers to validate its compatibility with all of the components used in order to guarantee that the intended functions will be fulfilled and this for the desired life time of all equipment items.



For biodegradable fluids, consult your Poclain Hydraulics' application engineer



During operation, the temperature of the oil must be between 0°C [32°F] and 80°C [176°F]; the minimum and maximum temperatures may be exceeded momentarily by $\pm 20^\circ\text{C}$ [$\pm 68^\circ\text{F}$] for a duration of less than 30 minutes. For all applications outside these limits, please consult with your Poclain Hydraulics' application engineer.

Pump storage



If the pump stays on stock for more than 6 months, a status verification must be performed before you install it on a machine. Pay attention to sealing condition, rust presence and free rotation of shaft.



Fluid and filtration

The contaminating particles suspended in the hydraulic fluid cause the hydraulic mechanisms moving part wear. On hydraulic pumps, these parts operate with very small dimensional tolerances. In order to reach the part life, it is recommended to use a filter that maintains the hydraulic fluid contamination class at a max. of:

6 according to NAS 1638
20/18/13 according to ISO 4406

According to the type of application decided for the pump, it is necessary to use filtration elements with a filtration ratio of:

β_{20} to $30 \geq 100$

Making sure that this ratio does not worsen together with the increasing of the filter cartridge differential pressure.

If these values cannot be observed, the component life will consequently be reduced and it is recommended to contact the Poclain Hydraulics Customer Service.

Filters on charge circuit

Filters on the charge circuit (F0-F2) are designed without by-pass. The max. pressure drop on the filtration part must not exceed 2 bar [29 PSI] (3 bar [43.5 PSI] in case of cold starting) at pump full rating. To monitor the pressure drop, It is recommended to use the clogging indicator on the filtration element (F2 option). Contact your Poclain Hydraulics Application engineer, each time the pump is not charged by its internal charge pump.

Filters on charge circuit are mounted on the pump special support.

Filters assembling

The suction filter is mounted on the suction line. Check that the pressure before the charge pump is 0.8 bar abs. [11.6 PSI abs.], measured on the pump suction port (0.5 bar [7.2 PSI] for cold starting).

Viscosity range


For both max. efficiency and life of the unit, the operative viscosity should be chosen within the optimum range of:

ν_{opt} = optimum operating viscosity from 16 to 36 mm²/s [from 74.1 to 166.8 SUS] referred to the closed loop temperature.

Working conditions: the following limits of viscosity apply

ν_{min} = 5 mm²/s [23 SUS] short-duration at a max. permissible leakage oil temperature of 90° C [194°F]

ν_{max} = 1000 mm²/s [4 634 SUS] short-duration, on cold start.

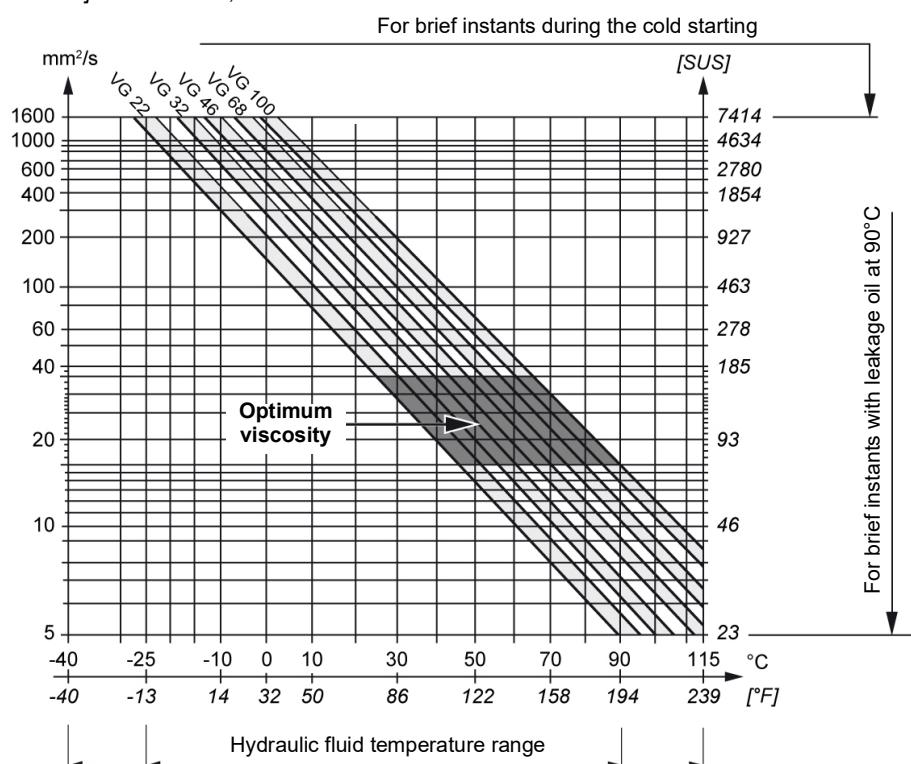

Ensure fluid temperature and viscosity limits are concurrently satisfied.

Model
Code

Technical
specifications

Operating
Parameters

System design
Parameters

Features

Controls

Options



SYSTEM DESIGN PARAMETERS



Consult your Poclain Hydraulics application engineer to validate your design parameters before using the pump in your application.

Sizing equations

The following equations are helpful when sizing hydraulic pumps. Generally, the sizing process is initiated by an evaluation of the machine system to determine the required motor speed and torque to perform the necessary work function. First, the motor is sized to transmit the maximum required torque. The pump is then selected as a flow source to achieve the maximum motor speed.

$$\text{Output flow } Q = \frac{V_g \cdot n \cdot \eta_v}{1000} \quad (\text{l/min})$$

$$\text{SI units} \quad \text{Input torque } M = \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_m} \quad (\text{N.m})$$

$$\text{Input power } P = \frac{M \cdot n \cdot \pi}{30\,000} = \frac{Q \cdot \Delta p}{600 \cdot n_t} \quad (\text{kW})$$

$$\text{Output flow } Q = \frac{V_g \cdot n \cdot \eta_v}{231} \quad [GPM]$$

$$\text{US units} \quad \text{Input torque } M = \frac{V_g \cdot \Delta_p}{2 \cdot \pi \cdot \eta_m} \quad [lbf \cdot in]$$

$$\text{Input power } P = \frac{M \cdot n \cdot \pi}{198\,000} = \frac{Q \cdot \Delta p}{1714 \cdot n} \quad [hp]$$

V_g =Displacement per revolution cm^3/tr [in^3/rev]
 $\Delta p = p_o - p_i$ (system pressure) bar [PSI]

n = Speed min^{-1} [rpm]

η_v = Volumetric efficiency

η_m = Mechanical efficiency

$$\eta_t = \text{Overall efficiency} = \eta_v \times \eta_m$$

Redundant braking system requirement




Unintended vehicle or machine movement hazard.


The loss of hydrostatic drive line power, in any mode of operation (forward, neutral, or reverse) may cause the system to lose hydrostatic braking capacity. You must provide a braking system, redundant to the hydrostatic transmission, sufficient to stop and hold the vehicle or machine in the event of hydrostatic drive power loss.

Loop flushing

Closed circuit may require a flushing valve to meet temperature and cleanliness requirements. A flushing valve takes a part of hot fluid flow from the low pressure loop of the system loop for cooling and filtering. Make sure that the charge pump provides adequate flow for the flushing valve flushing and the flushing valve does not cause charge pressure to drop below recommended limits.

See option VS page 42
for more information

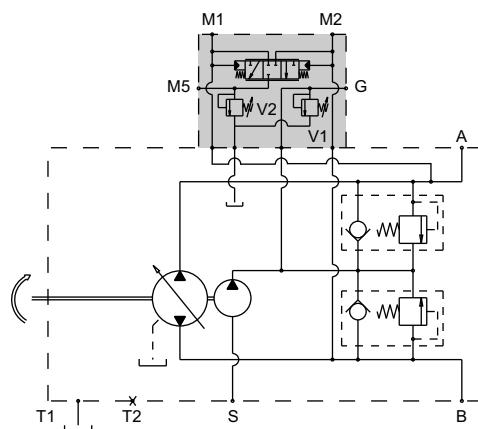



Reservoir

The reservoir provides clean fluid, dissipates heat, and removes entrained air from the hydraulic fluid. It allows for fluid volume changes associated with fluid expansion and cylinder differential volumes. Minimum reservoir capacity depends on the volume needed to perform these functions. Typically, a capacity of one half the charge pump flow (per minute) is satisfactory for a closed reservoir. Open circuit systems sharing a common reservoir require greater fluid capacity.


Locate the reservoir outlet (suction line) near the bottom, allowing clearance for settling foreign particles. Use a 100 - 125 μm screen covering the outlet port.

Place the reservoir inlet (return lines) below the lowest expected fluid level, as far away from the outlet as possible.

Use a baffle (or baffles) between the reservoir inlet and outlet ports to promote de-aeration and reduce fluid surging.


Case drain usage for tandem pump

On tandem pumps, and to ensure lubrication of both pumps, excess flow from the second pump charge relief valve must be routed into the housing of the first pump.

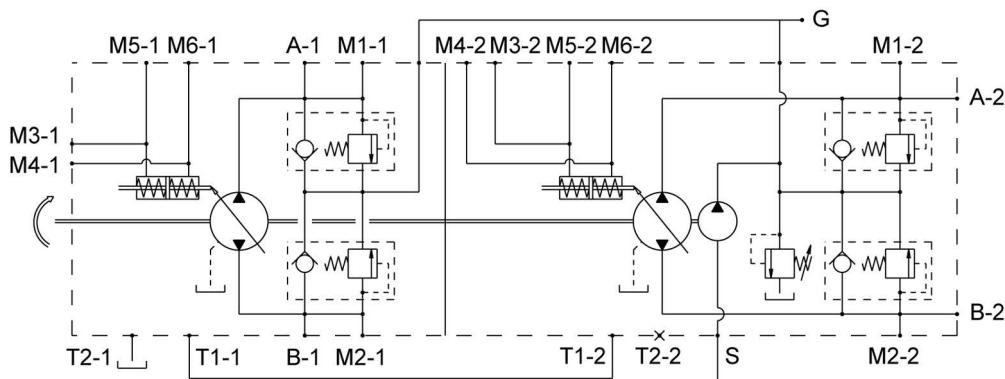

Differential pressure

The differential pressure is the High pressure relief valve setting minus Charge relief valve setting.

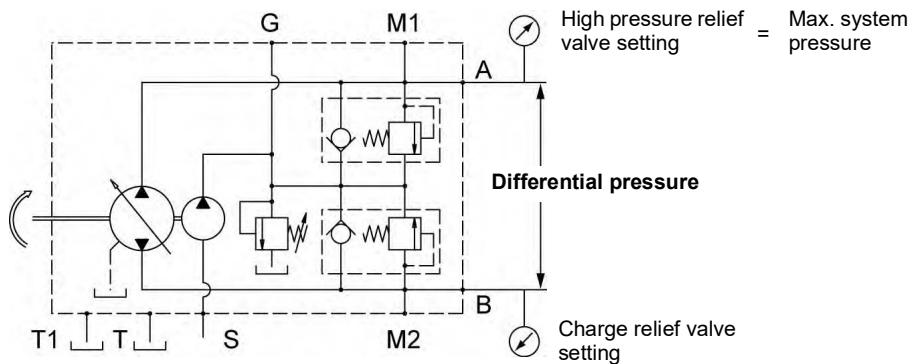



Bearing life and external shaft loading

Bearing life:

Bearing life is a function of speed, pressure, swashplate angle and external loads. Oil type and viscosity impact bearing life.

Bearing life (B_{10} hours)	
PMV0-07	32 560
PMV0-09	15 480
PMV0-11	6 990
PMV0-14	4 500
PMV0-18	2 300

Shaft Loads

Normal bearing life in B_{10} hours is shown in the above table. Figures have been calculated under the following operating conditions: a continuous differential pressure of 120 bar [1 740 PSI], 1 800 rpm shaft speed, maximum displacement, without any external shaft side load. The data is based on a 50% forward, 50% reverse duty cycle, standard charge pump size, and standard charge pressure (20 bar [290 PSI]).

PMV0 pumps are designed with bearings that can accept external radial and thrust loads. The external radial shaft load limits depend on the load position, orientation, and operating conditions of the unit.

The **maximum permissible radial load (Re)**, is based on the **maximum external moment (Me)**, and the **distance (L)** from the mounting flange to the load. It may be determined using the table and formula below. Thrust (axial) load limits are also shown.

$$Re = Me / L$$


All external shaft loads affect bearing life. In applications with external shaft loads, minimize the impact by positioning the load at 90° or 270° as shown in the figure.

Contact your Poclain Hydraulics representative for an evaluation of unit bearing life if:

- Continuously applied external loads exceed 25 % of the maximum allowable radial load Re.
- The pump swashplate is positioned on one side of center all or most of the time.
- The unit bearing life (B_{10}) is critical.

	PMV0-07	PMV0-09	PMV0-11	PMV0-14	PMV0-18
External moment (Me) N.m [in.lbf] (Based on shaft deflection)	66	60	51	45	35

Radial and thrust load position

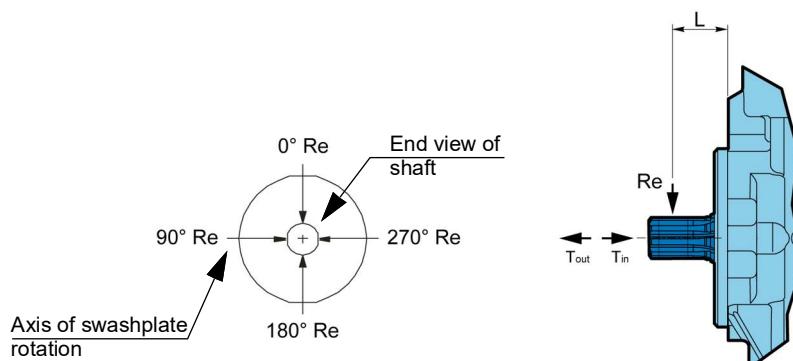



Hydraulic unit life

Hydraulic unit life is the life expectancy of the hydraulic components. It depends on speed and system pressure even if, system pressure is the dominant operating variable. High pressure, generated by high load, reduces hydraulic unit life.

Design the hydraulic system according to the expected machine duty cycle. Take in consideration the expected percentages of time at various loads and speeds. Ask your Poilain Hydraulics representative to calculate an appropriate pressure based your hydraulic system design. If duty cycle data is not available, input power and pump displacement are used to calculate system pressure.


All pressure limits are differential pressures (referenced to charge pressure), taking a normal charge pressure in consideration.

PMV0 pumps will meet satisfactory life expectancy if applied within the parameters specified in this technical documentation. For more detailed information on hydraulic unit life see Operating Parameters in page 11.

Mounting flange loads

Adding tandem mounted pumps, and/or tandem auxiliary pump(s), subjecting pumps to shock loads may generate excessive loads on the front mounting flange. The overhung load moment for multiple pump mounting can be estimated as shown in the figure below

Overhung load example

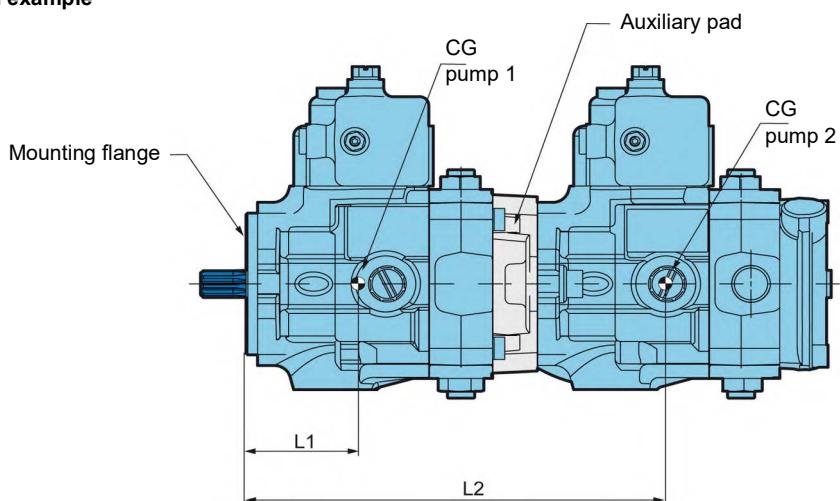

Estimating overhung load moments

W = Weight of pump (kg)

L = Distance from mounting flange to pump center of gravity (CG)

$$M_R = G_R (W_1 L_1 + W_2 L_2 + \dots + W_n L_n)$$

$$M_S = G_S (W_1 L_1 + W_2 L_2 + \dots + W_n L_n)$$

Where:

M_R = Rated load moment (N.m)

M_S = Shock load moment (N.m)

G_R * = Rated (vibratory) acceleration (G's) (m/sec^2)

G_S * = Maximum shock acceleration (G's) (m/sec^2)

*Calculations will be carried out by multiplying the gravity ($g = 9.81 m/sec^2$) with a given factor. This factor depends on the application.

Allowable overhung load moments are shown in the table below. Values in the table are valid for all displacements. Exceeding these values requires additional pump support.

	Rated moment (MR)	Shock moment (MS)
	Nm [in.lbf]	Nm [in.lbf]
PMV0 - 07, 09, 11, 14, 18	247 [2186]	400 [3540]



For an accurate calculation, consult your Poilain Hydraulics application engineer.



FEATURES

High pressure relief valve

The High pressure relief valves maintain circuit pressure in the proper range. The check valves allow charge flow to replenish the low pressure loop of the circuit. The high pressure relief valves ensure a high pressure protection of the high pressure loop of the circuit.

High pressure relief valves are available in a range of settings.



When high pressure relief valves are not desired, pumps are equipped with charge circuit check valves only.



High pressure relief valves are intended for transient overpressure protection and are not intended for continuous pressure control. Flow over relief valves for extended periods of time may result in severe heat build up. High flows over relief valves may result in pressure levels exceeding the nominal valve setting and potential damage to system components.

P M V 0	<input type="checkbox"/>										
----------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

High pressure relief valve	Available setting bar [PSI]	
Without	-	00
	100 [1 450]	10
	150 [2 175]	15
With	200 [2 900]	20
	250 [3 625]	25
	300 [4 351]	30

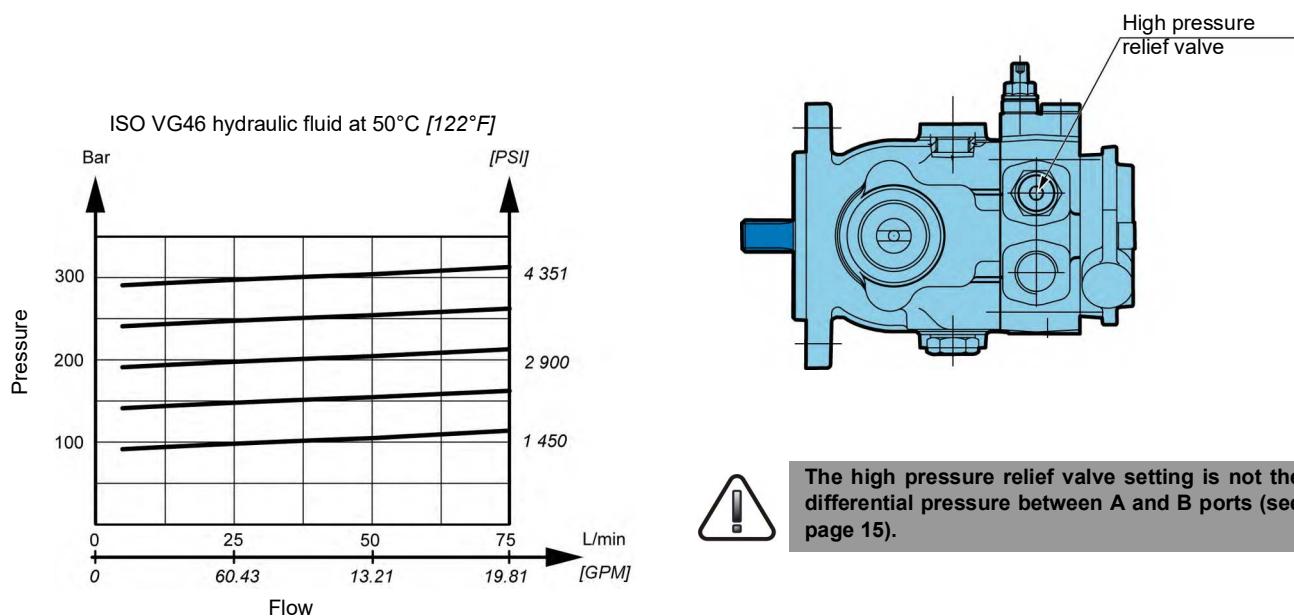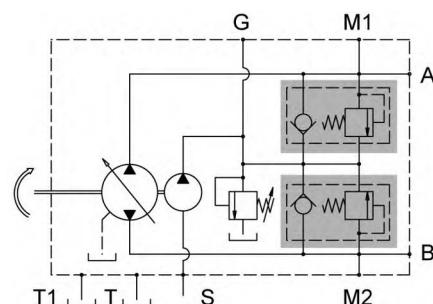



Charge relief valve

The charge pressure relief valve provides a relief outlet for charge circuit. This valve is used to set the charge pressure of the circuit. Flow through the valve is ported to case.


The nominal charge relief setting is referenced to case pressure.





Incorrect charge pressure settings may result in the inability to build required system pressure and/or inadequate loop flushing flows. Ensure correct charge pressure under all conditions of operation to maintain pump control performance.



Charge relief valve	Available setting bar [PSI]
Without	-
With	Only for controls M and N 10 [145]
	For all controls 20 [290]

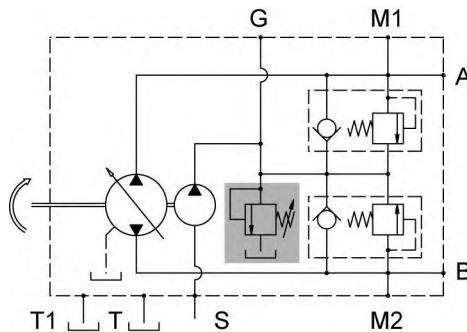

ISO VG46 hydraulic fluid at 50°C [122°F]

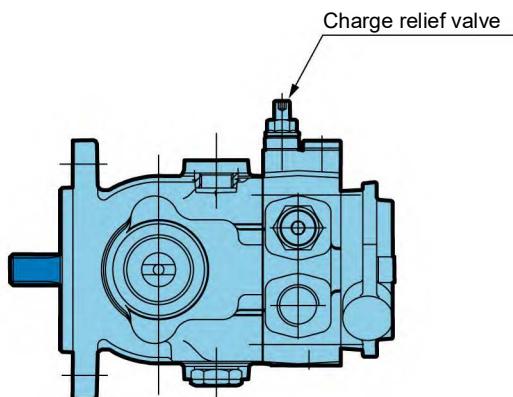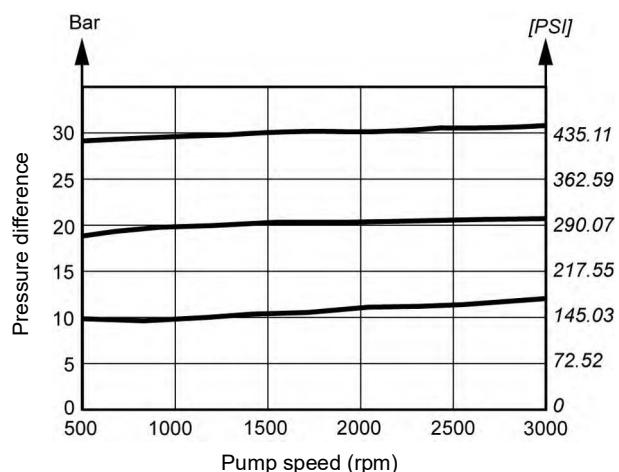

Model Code

Technical specifications

Operating Parameters

System design Parameters

Features

Controls

Options




Charge pump

Charge flow is required on all PMV0 pumps used in closed circuit installations. The charge pump provides flow to make up internal leakage, maintain a positive pressure in the main circuit, provide flow for cooling and filtration, replace any leakage losses from external valving or auxiliary systems, and to provide flow and pressure for the control system.

Many factors influence the charge flow requirements. These factors include system pressure, pump speed, pump swashplate angle, type of fluid, temperature, size of heat exchanger, length and size of hydraulic lines, control response characteristics, auxiliary flow requirements, hydrostatic motor type, etc.

Unusual application conditions may require a more detailed review of charge pump sizing. Charge pressure must be maintained at a specified level under all operating conditions to prevent damage to the transmission. Poclain Hydraulics recommends testing under actual operating conditions to verify this.

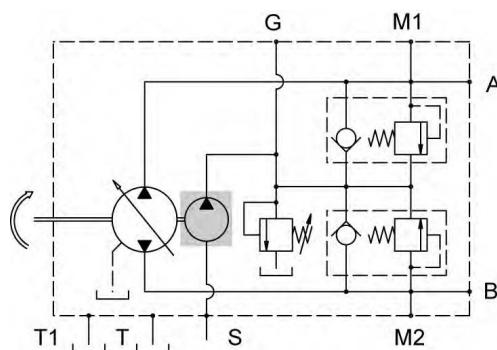

Charge pump sizing/selection

In most applications, a general guideline is that the charge pump displacement should be at least 20% of the main pump displacement.

P M V 0	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	<input type="checkbox"/> 6	<input type="checkbox"/> 7	<input type="checkbox"/> 8	<input type="checkbox"/> 9	<input type="checkbox"/> 10	<input type="checkbox"/> 11	<input type="checkbox"/> 12
Charge pump												
Without	-	-	-	-	-	-	-	-	00			
With										05		



Consult your Poclain Hydraulics application engineer for more information.



Pump version without internal charge pump is available. In this case an external flow must provide charge pressure and charge flow in order to assure the requested pump performance.




Displacement limiters

PMV0 with hydraulic servo control (S) are designed with mechanical displacement (stroke) limiters. You can limit maximum displacement of the pump to a certain per-cent of its maximum displacement to near zero in both direction.

The displacement limiters are located on the both sides of the servo piston and are adjustable by screw. On request is possible to set different max. displacement. First displacement for output flow on port A.



Take care in adjusting displacement limiters to avoid an undesirable condition of output flow or speed. Retorque the sealing lock nut after every adjustment to prevent an unexpected change in output conditions and to prevent external leakage during pump operation.

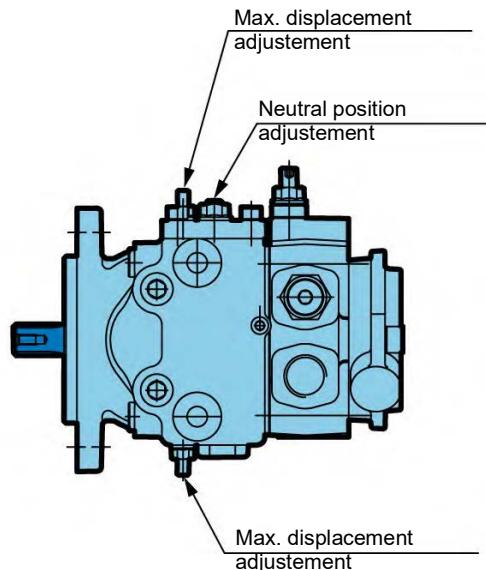

By-pass

See "Options" chapter page 36 and page 37 for more information.

Model
Code

Technical
specifications

Operating
Parameters

System design
Parameters

Features

Controls

Options




Mounting flange and shafts

SAE A - Splined shaft




S1 9 teeth; Max torque: 80 N.m [708 in.lbf]

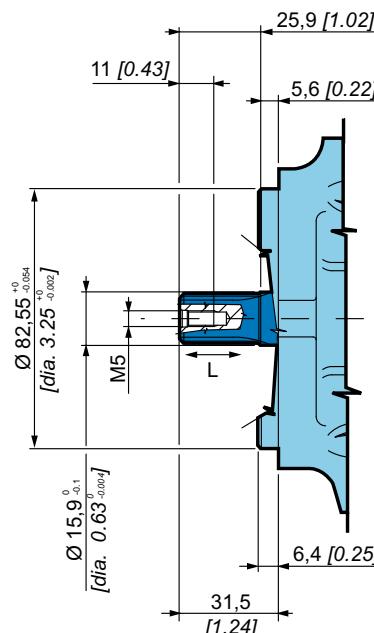

Splined ANSI B92.1a-1996
Pitch 16/32" DP
Pressure angle: 30°
Tolerance class: 5
Thread M5 UNI 9321

Effective length (L) = $17,5^{+1,5}_{-0,69} [0,69^{+0,06}]$

S2 11 teeth; Max torque: 140 N.m [1 239 in.lbf]

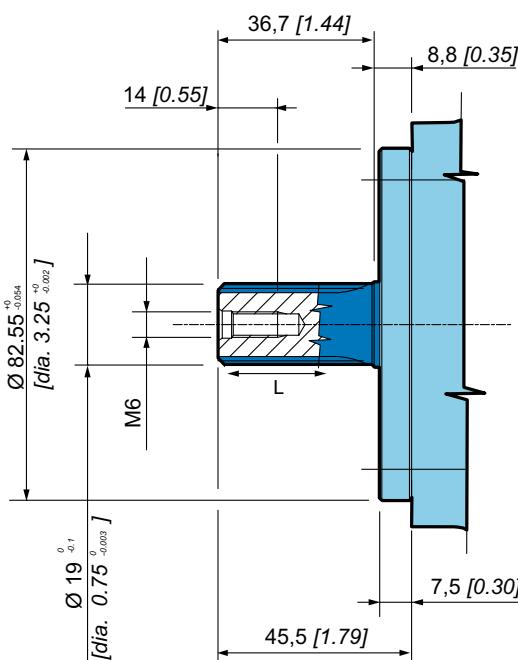

Splined ANSI B92.1a-1996
Pitch 16/32" DP
Pressure angle: 30°
Tolerance class: 5
Thread M6 UNI 9321


Effective length (L) = $27,2^{+1,5}_{-0,69} [1,07^{+0,06}]$




SAE A - Key shaft



C1 Ø 15,875 [dia. 0.624]; Max. torque: 65 N.m [575 in.lbf]

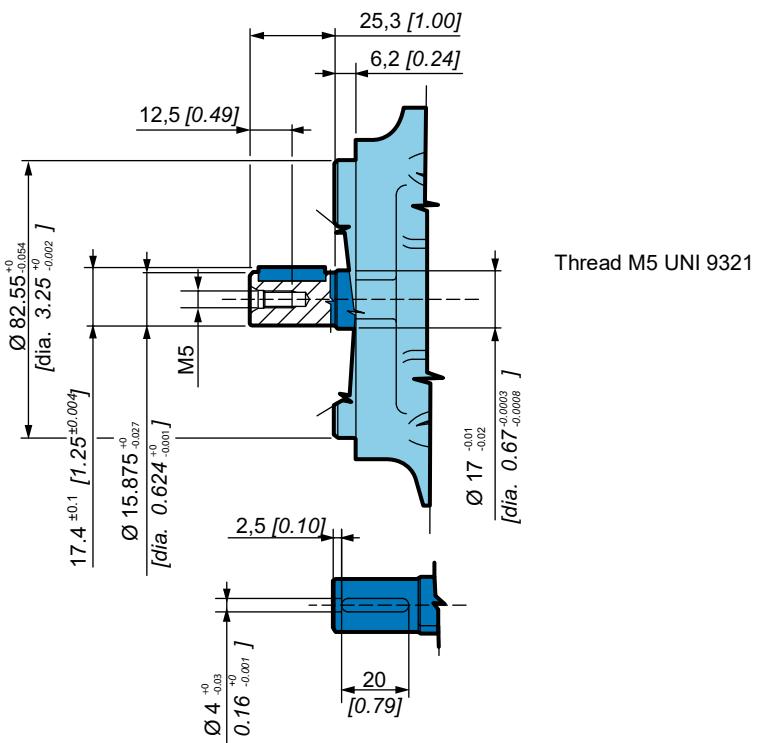

D2 Ø 18 [dia. 0.71]; Max. torque: 100 N.m [885 in.lbf]

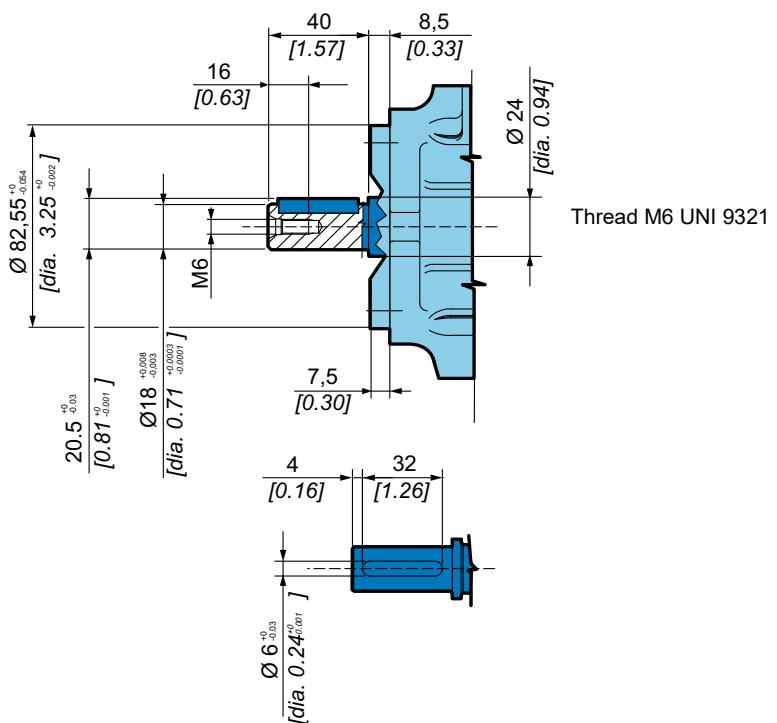

Model Code

Technical specifications

Operating Parameters

System design Parameters

Features

Controls

Options




Auxiliary mounting pad

German group 1


Max. torque: 48 N.m [425 in.lbf]



00 Without charge pump

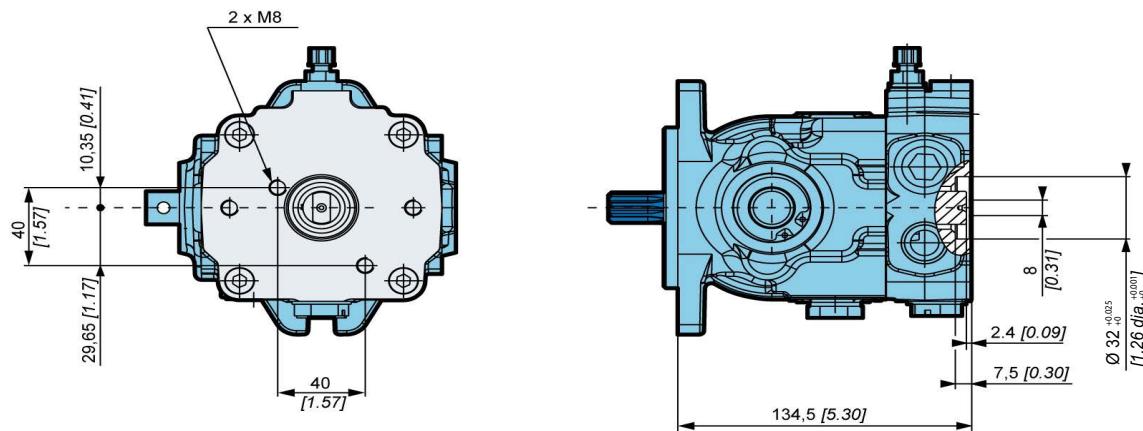

05 With charge pump: 4.9 cm³/rev [0.30 in³/rev]

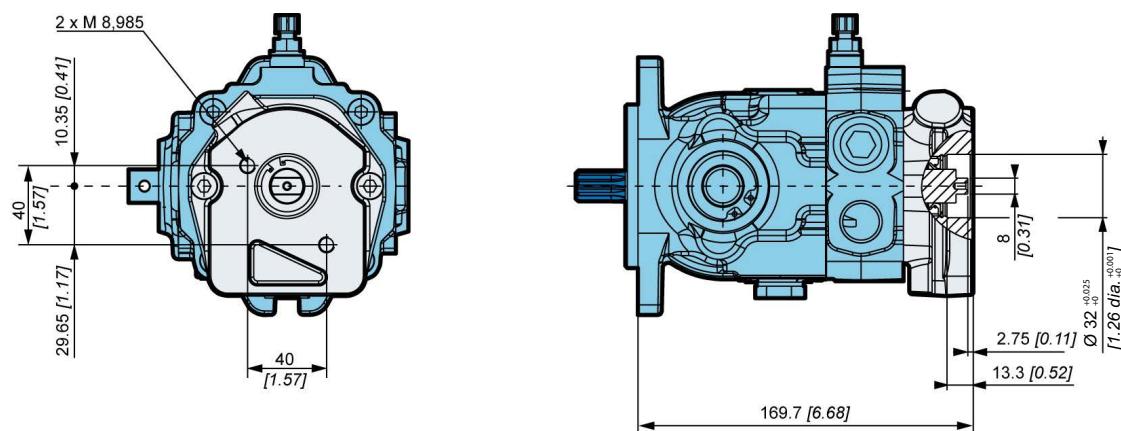

Do not rotate the auxiliary mounting pad cover.





German group 2



Max. torque: 70 N.m [620 in.lbf]



00 Without charge pump

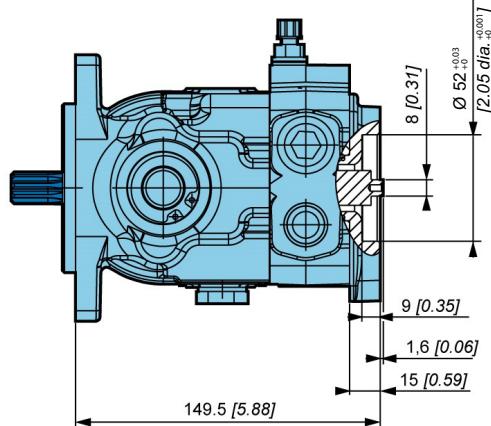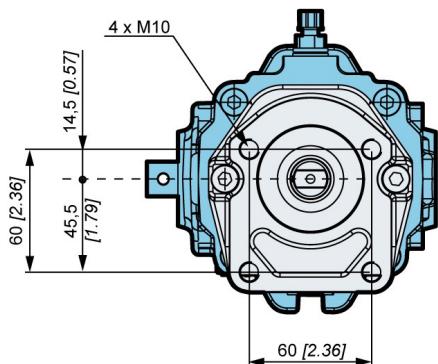

05 With charge pump: 4,9 cm³/rev [0.30 in³/rev]

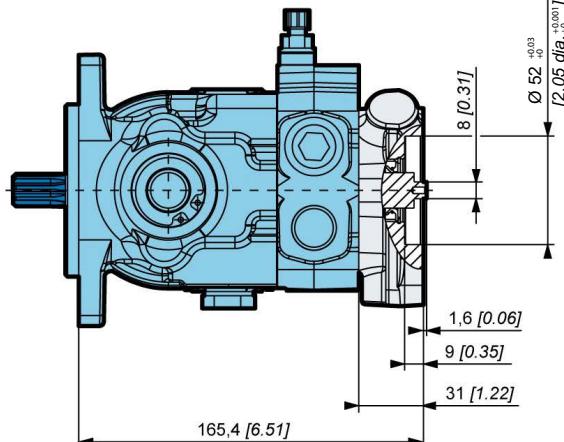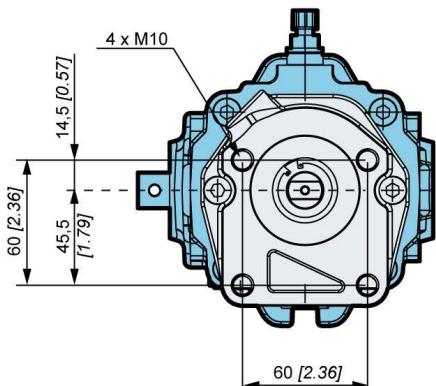

Do not rotate the auxiliary mounting pad cover.

Model
Code

Technical
specifications

Operating
Parameters

System design
Parameters

Features


Controls

Options



Tandem pumps

Max. torque intermediate coupling
70 N.m [620 in.lbf]

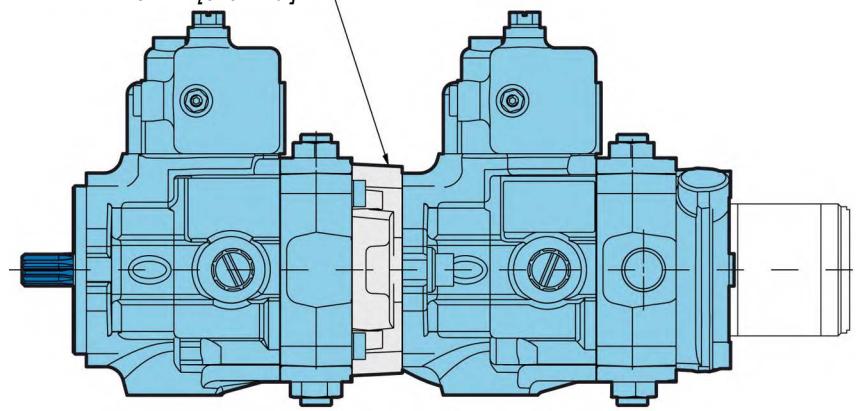

Front axial pump


Rear axial pump

Next pump

M_e input torque → M_{e1} for the front pump → M_{e2} for the rear pump → M_{e3} for the next pump




Torque required by auxiliary pumps is additive.
Ensure requirements don't exceed shaft torque ratings.

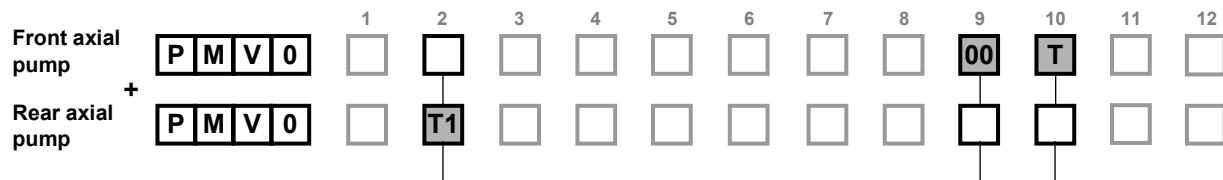

Number of charge pump in the tandem	Axial pump	Mounting flange and shaft	Charge pump	Auxiliary mounting flange
0 charge pump	Front	SAE A; 9 teeth	S1	Without 00 Tandem fitting T
		SAE A; 11 teeth	S2	
		Key shaft Ø 18 [dia. 0.71]	D2	
	Rear	Shaft for secondary tandem pump	T1	Without auxiliary mounting pad S German group 1 F German group 2 G
1 charge pump*	Front	SAE A; 9 teeth	S1	Without 00 Tandem fitting T
		SAE A; 11 teeth	S2	
		Key shaft Ø 18 [dia. 0.71]	D2	
	Rear	Shaft for secondary tandem pump	T1	With 05 Without auxiliary mounting pad S German group 1 F German group 2 G



* The charge pump can only be located on the rear axial pump.

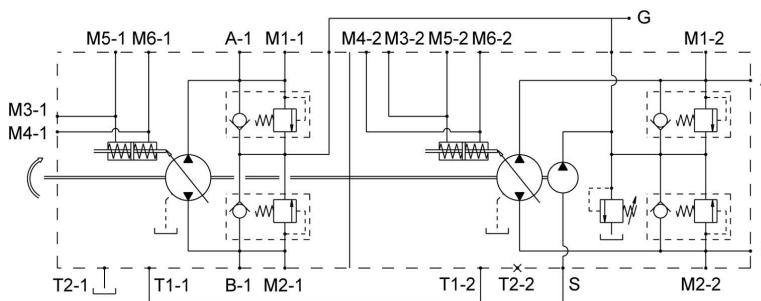

Ports T1-1 and G of the first pump
must be connected with ports T1-2 and
G of the second pump.

T2-2 is closed, T2-1 is opened and
connected with tank or oil exchanger.


Gear pumps

P M V 0

1 2 3 4 5 6 7 8 9 10 11 12

Auxiliary mounting pad

Gear pump



	Displacement cm ³ /rev [cu.in/rev]	Pressure			Dimension			Mass Kg [lb]	Efficiency %
		Continuous max. pressure bar [PSI]	Max. intermittent pressure bar [PSI]	Max. peak pressure bar [PSI]	A mm [in]	B mm [in]	C mm [in]		
F	01	1,6 [0.10]	210 [3 045]	240 [3 480]	260 [3 770]	76,4 [3.01]			0,95 [2.09]
	02	2,0 [0.12]	210 [3 045]	240 [3 480]	260 [3 770]	77,9 [3.07]			0,97 [2.14]
	03	3,2 [0.19]	200 [2 900]	240 [3 480]	250 [3 625]	82,6 [3.25]	67 [2.64]	70 [2.76]	1,04 [2.29]
	04	4,2 [0.26]	180 [2 610]	210 [3 045]	230 [3 335]	86,5 [3.41]			1,10 [2.43]
	05	5,0 [0.30]	180 [2 610]	210 [3 045]	230 [3 335]	89,6 [3.53]			1,14 [2.51]
	06	6,3 [0.38]	170 [2 465]	190 [2 755]	210 [3 045]	94,7 [3.73]			1,22 [2.69]
G	04	4,5 [0.27]	250 [3 625]	270 [3 915]	290 [4 205]	90,3 [3.55]			2,30 [5.07]
	06	6,0 [0.37]	250 [3 625]	270 [3 915]	290 [4 205]	93,6 [3.68]			2,45 [5.40]
	08	8,5 [0.52]	250 [3 625]	270 [3 915]	290 [4 205]	97,8 [3.85]			2,60 [5.73]
	11	11,0 [0.67]	250 [3 625]	270 [3 915]	290 [4 205]	101,9 [4.01]	88 [3.46]	100 [3.94]	2,70 [5.95]
	14	14,0 [0.85]	250 [3 625]	270 [3 915]	290 [4 205]	106,9 [4.21]			2,80 [6.17]
	17	16,5 [1.01]	230 [3 335]	240 [3 480]	250 [3 625]	111,1 [4.37]			2,95 [6.51]
	20	19,5 [1.19]	210 [3 045]	220 [3 190]	230 [3 335]	116,1 [4.57]			3,10 [6.84]

* Value collected during the testing at 1500 rpm



Gear pumps are always delivered flanged on the axial pump. They can not be sold alone.



CONTROLS



Direct mechanical control




The variation in pump displacement is obtained by rotating the lever shaft in a clockwise or counter-clockwise direction. The lever shaft is directly linked to the pump swashplate. The max. angle is at 18°.

Flow rate determination

Rotation	Pressure	Output	Input
Clockwise (R)	X	A	B
	Y	B	A
Counter clockwise (L)	X	B	A
	Y	A	B

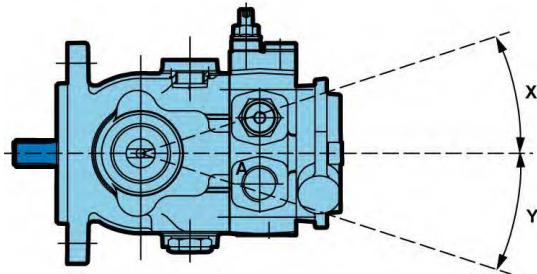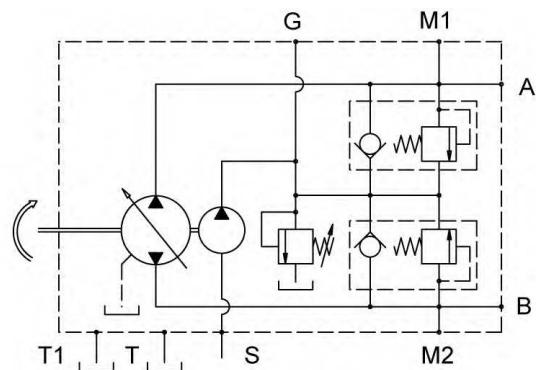

Control shaft torque

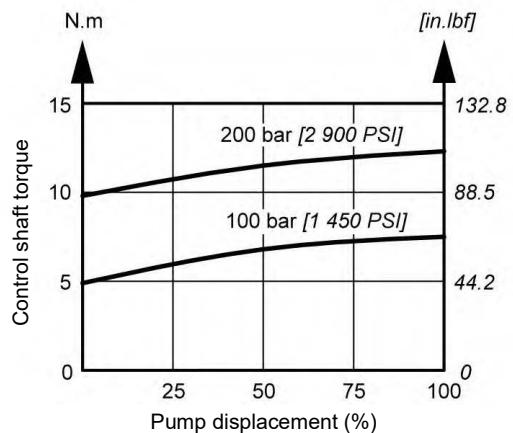


The mechanical linkage to stroke the pump must be able to return the pump to neutral in all conditions.




PMV0 1 2 3 **M** 4 5 6 7 8 9 10 11 12

Control Position

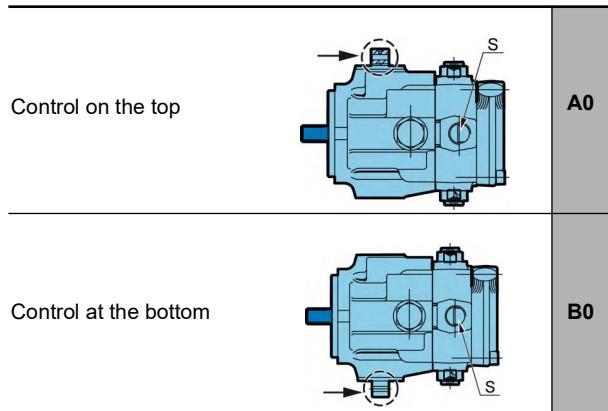

Dimensions for control M

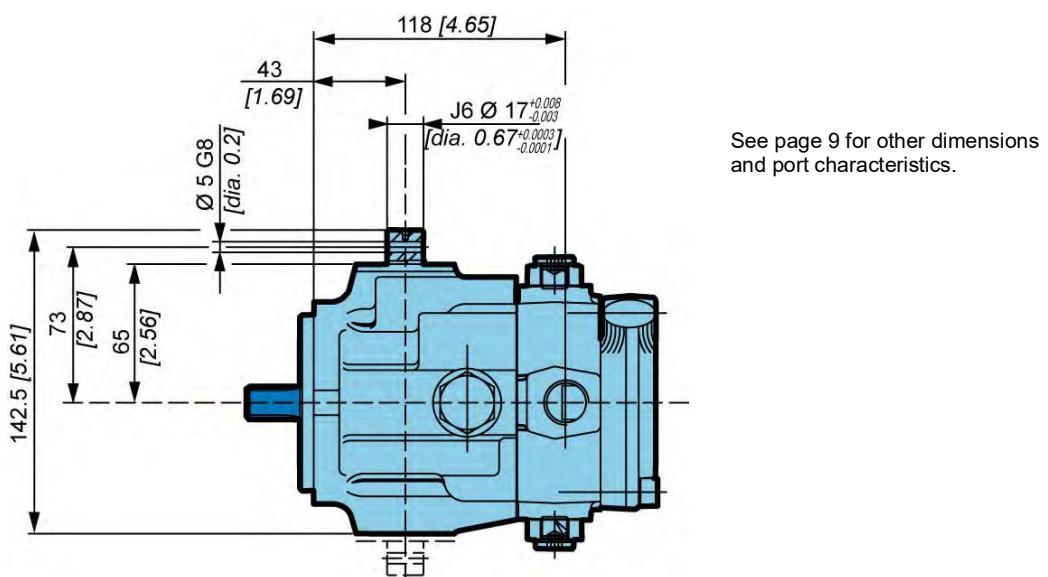

Model Code

Technical specifications

Operating Parameters

System design Parameters

Features

Controls

Options






Direct mechanical control with return spring




The variation in pump displacement is obtained by rotating the lever shaft in a clockwise or counter-clockwise direction. The lever shaft is directly linked to the pump swashplate. The max. angle is at 18°.

Flow rate determination


Rotation	Pressure	Output	Input
Clockwise (R)	X	A	B
	Y	B	A
Counter clockwise (L)	X	B	A
	Y	A	B

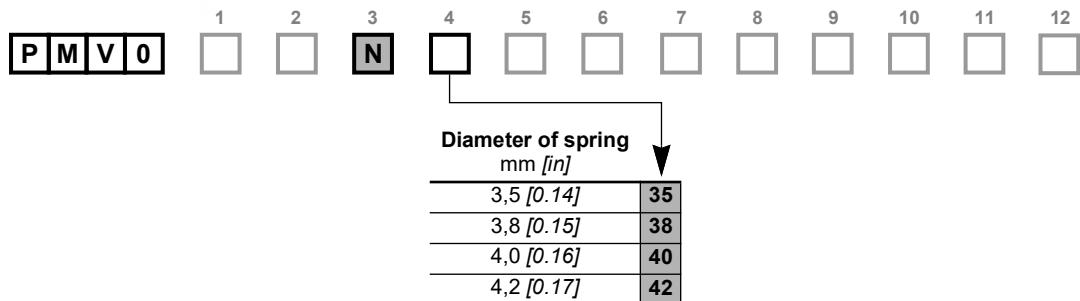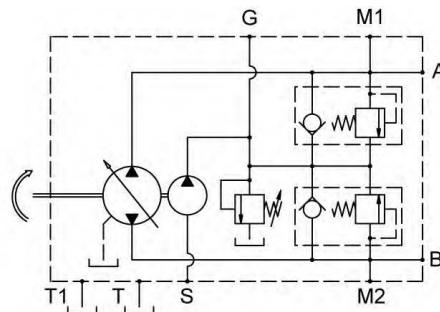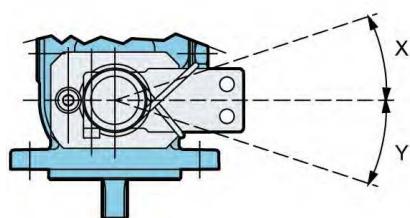

Control shaft torque at 100 bar [1 450 PSI]

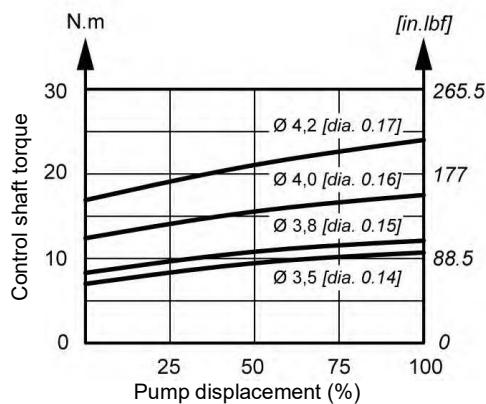

Control shaft torque at 200 bar [2 900 PSI]

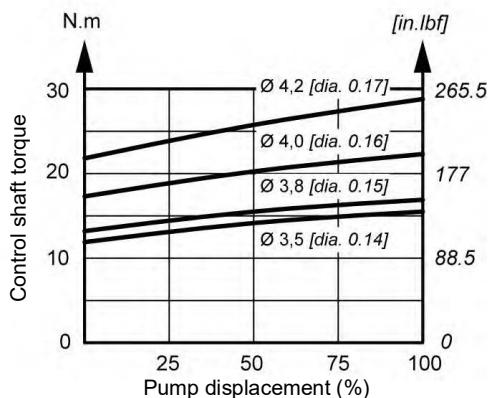


The spring return feature in the control unit is not a safety device.





The mechanical linkage built by the customer to stroke the pump should be able to return the pump to neutral in all conditions.



Control position

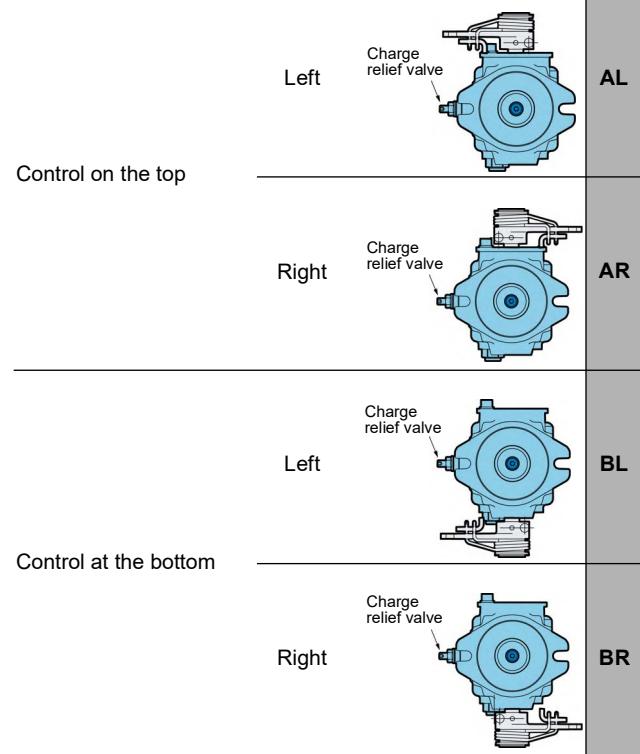

Dimensions for control N

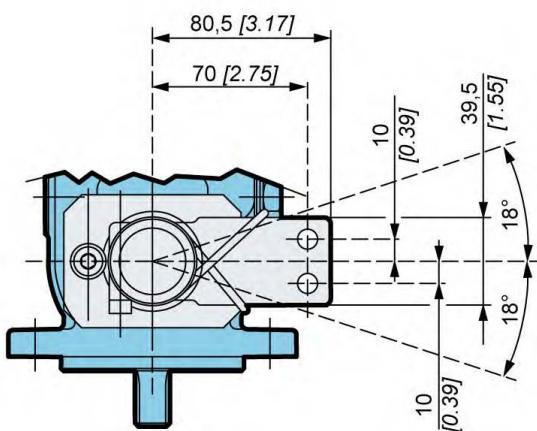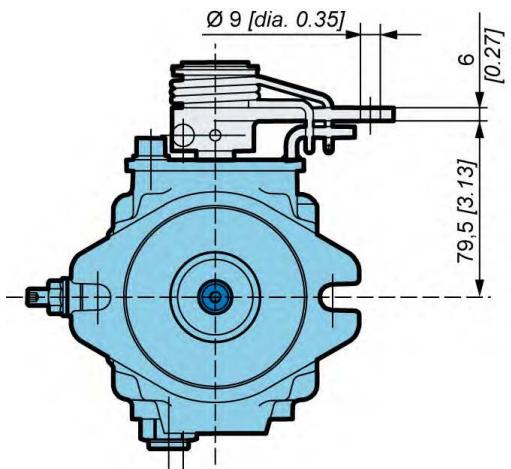

See page 9 for other dimensions and port characteristics.

Model Code

Technical specifications

Operating Parameters

System design Parameters

Features

Controls

Options





Direct mechanical control with return spring and zero position setting



The variation in pump displacement is obtained by rotating the lever shaft in a clockwise or counter-clockwise direction. The lever shaft is directly linked to the pump swashplate. The max. angle is at 18°.

Flow rate determination


Rotation	Pressure	Output	Input
Clockwise (R)	X	A	B
	Y	B	A
Counter clockwise (L)	X	B	A
	Y	A	B

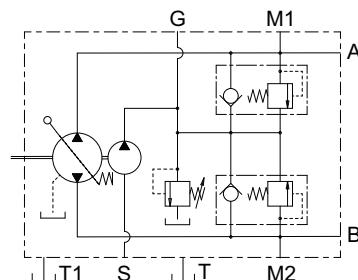

Diameter of spring mm [in]

2,5 [0.09]

25

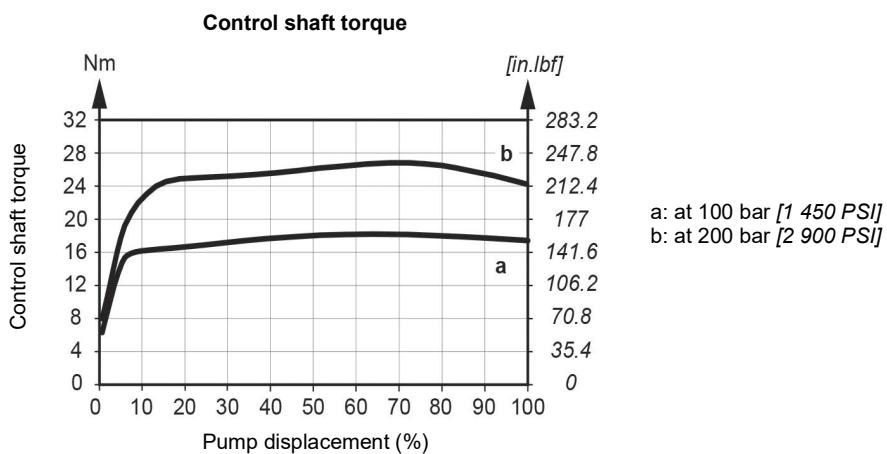

The mechanical linkage built by the customer to stroke the pump should be able to return the pump to neutral in all conditions.




The spring return feature in the control unit is not a safety device.




PMV0 1 2 3 L 4 5 6 7 8 9 10 11 12

Control position

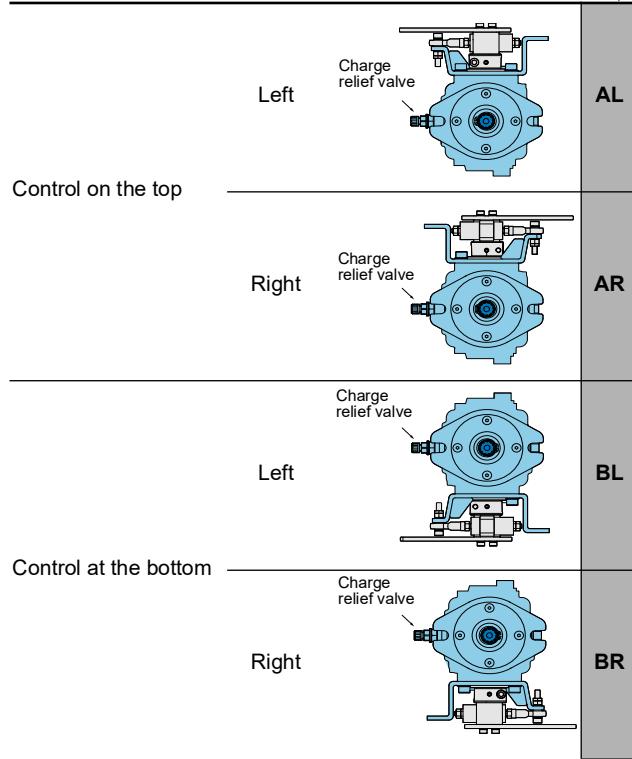

Dimensions for control L

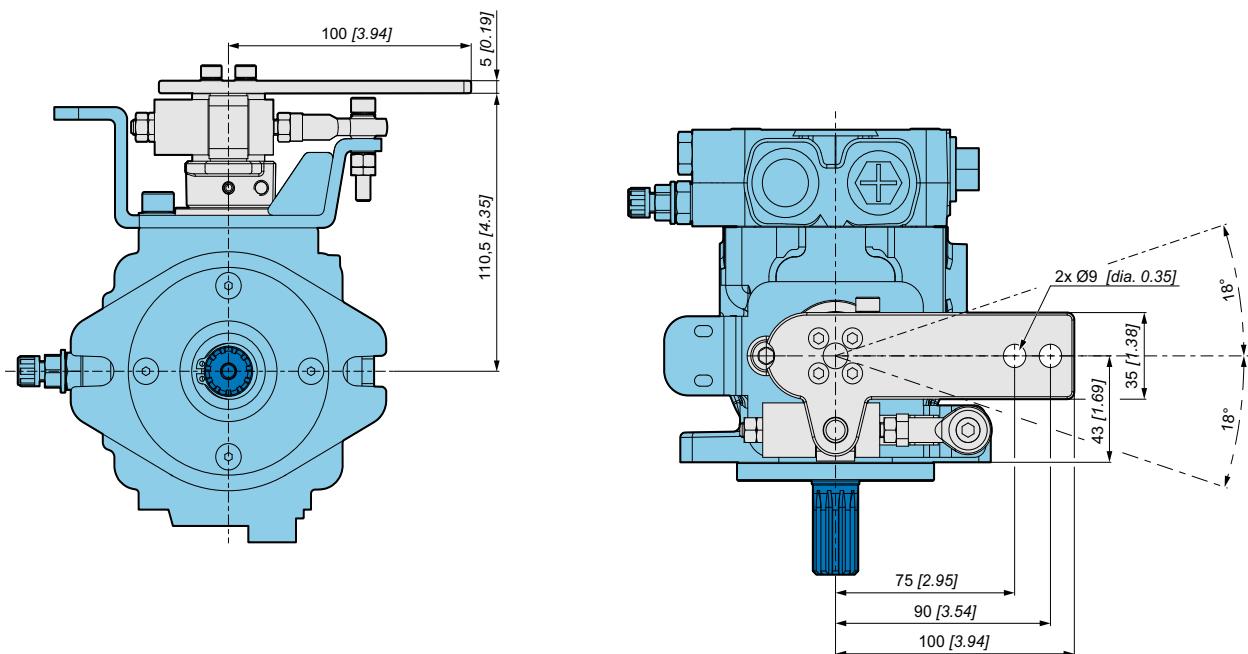

See page 9 for other dimensions
and port characteristics.

Model
Code

Technical
specifications

Operating
Parameters

System design
Parameters

Features

Controls

Options



Hydraulic servo control



The variation in pump displacement is obtained by adjusting the pressure on the M3 and M4 or M5 and M6 servo control connections by means of a hydraulic proportional joystick (containing pressure reduction valves).

The joystick supply can be obtained by taking pressure from the auxiliary pump (G connection).

The servo control timing can be adjusted by inserting a restrictor on the joystick supply line (from 0.5 to 1.2 mm [*from 0.02 to 0.05 in*]) or between the joystick and servo piston of the pump.


The servo control operation curve in both control directions goes from 4 to 11 bar [*from 58 to 159 PSI*] (tolerance $\pm 5\%$). The adjustment curve of the hydraulic control system has to be wider (from 4 to 15 bar [*from 58 to 217 PSI*]).




For the selection of the regulation curve (with or without step) of the joystick contact your Poclain Hydraulics application engineer.

Flow rate determination

Rotation	Pressure	Output	Input
Clockwise (R)	M3 - M5	B	A
	M4 - M6	A	B
Counter clockwise (L)	M3 - M5	A	B
	M4 - M6	B	A

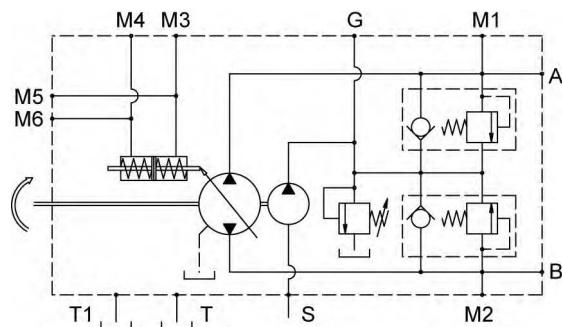

The back pressure of the return line of the joystick and the drive line of the pump have an influence on these values.

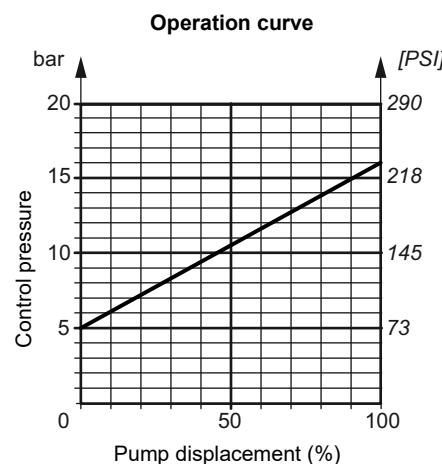


The spring return feature in the control unit is not a safety device.




Control position

Control on the top




A0

Control at the bottom



B0

Dimensions for control S

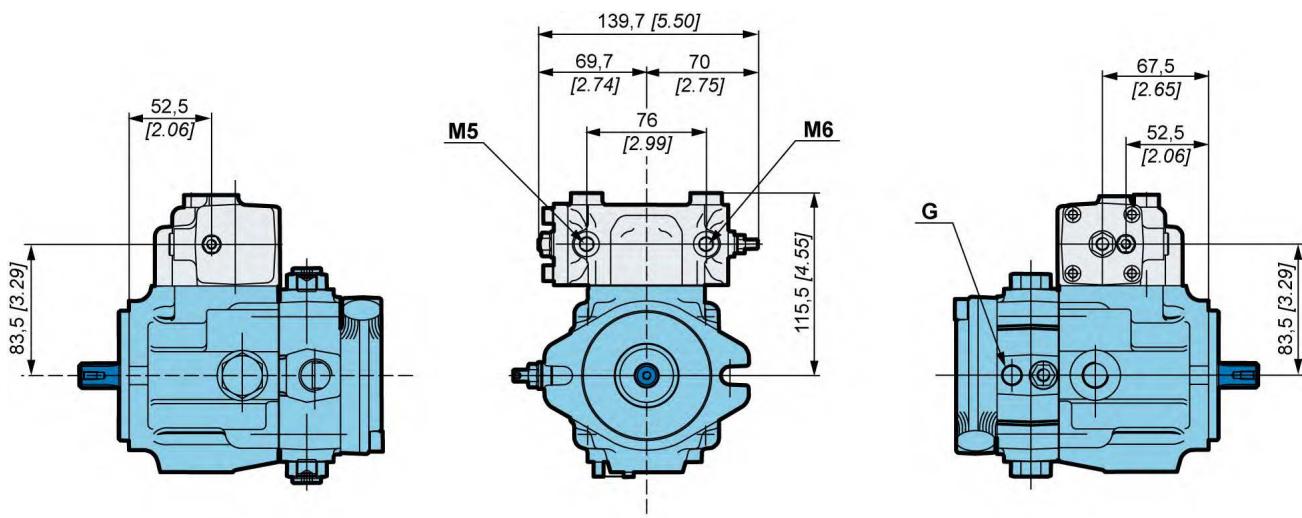

Port	Function	ISO 1179-1 (standard)	ISO 11926-1 (option FU)
M3 to M6	Pilot pressure	1/8" GAS	7/16-20 UNF-2B

See page 9 for other dimensions and port characteristics.

Model Code

Technical specifications

Operating Parameters

System design Parameters

Features

Controls

Options





OPTIONS

Screw by-pass

P	M	V	0	1	2	3	4	5	6	7	8	9	10	11	12
<input type="checkbox"/>															

PMV0 features a by-pass function. By-passing Port A and Port B is achieved by unscrewing a screw located on the cover. The by-pass connects the ports A-B and must be used only in emergency case and only for short movement.

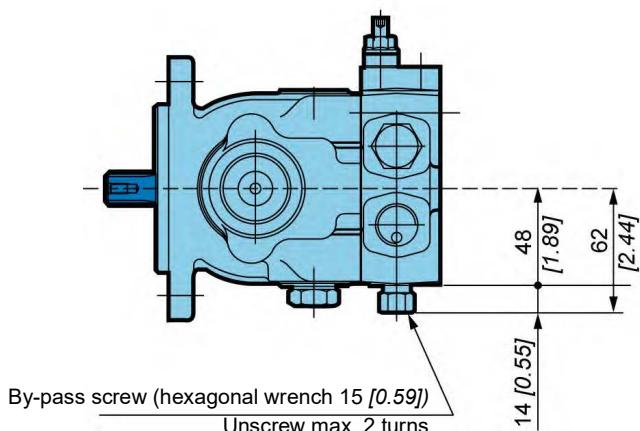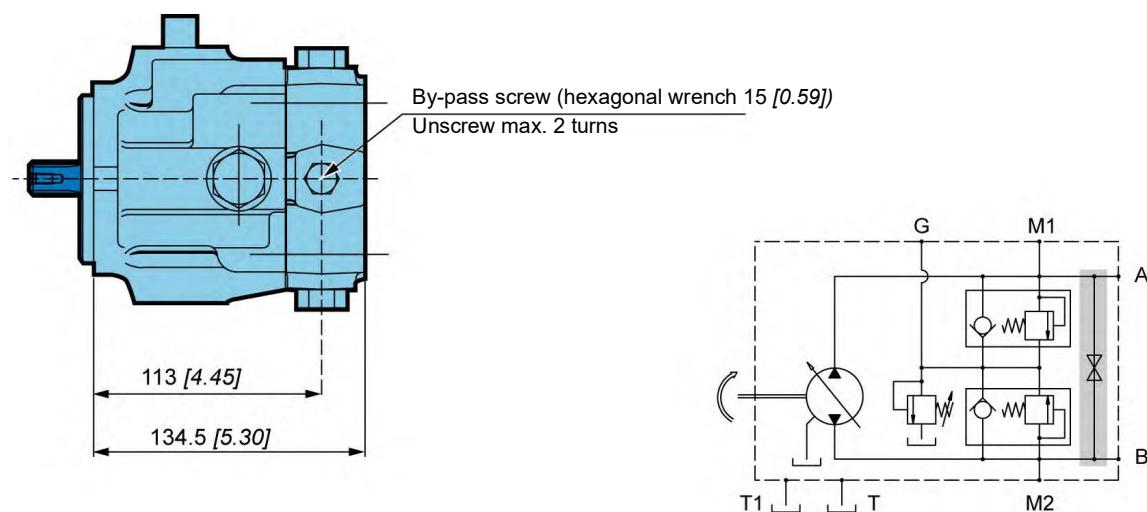

The screw by-pass is only available without charge pump.



To avoid leakage, do not exceed two turns of the screw.







By-pass valve is intended for moving a machine for very short distances at very slow speeds. It is not intended as tow valve.



Lever by-pass

P	M	V	0	1	2	3	4	5	6	7	8	9	10	11	12	BL
---	---	---	---	---	---	---	---	---	---	---	---	---	----	----	----	----

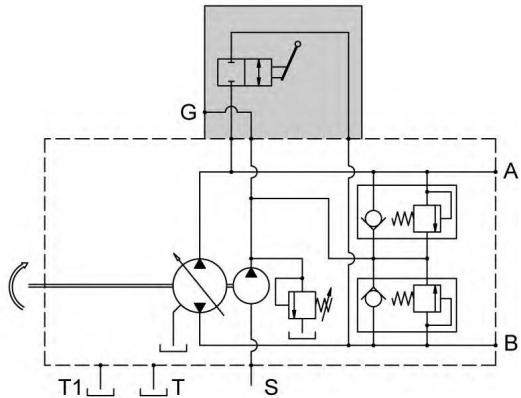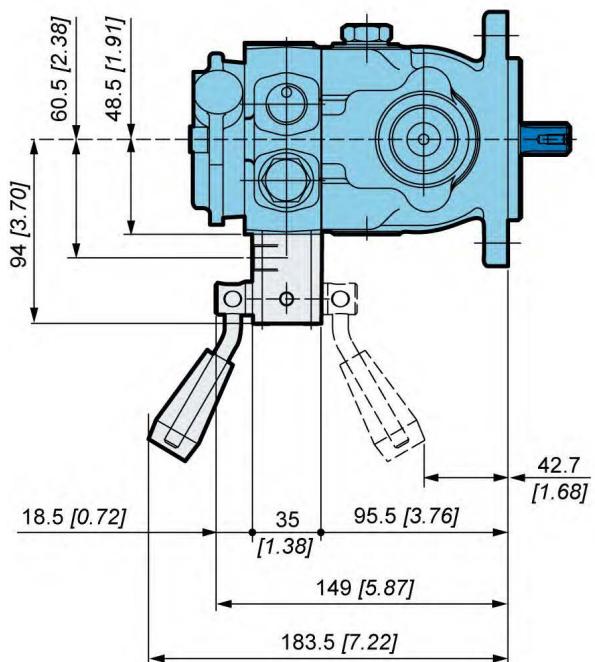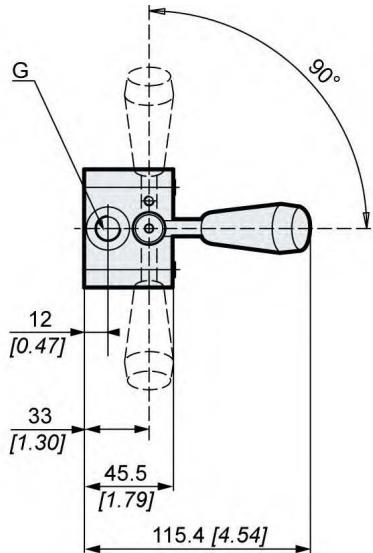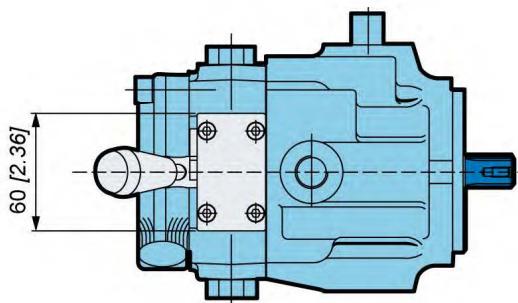

By-pass valve is intended for moving a machine for very short distances at very slow speeds. It is not intended as tow valve.

Model
Code

Technical
specifications

Operating
Parameters

System design
Parameters

Features

Controls

Options


**Electrical by-pass with brake engaged**

BF option is a safety feature.


Without electrical control, pump is in by-pass and parking brake is applied (there is no charge pressure on C3 port).

With electrical control, pump is not in by-pass and parking brake can be released (there is charge pressure on C3 port).



Supply voltage
12V
BF12
24V
BF24

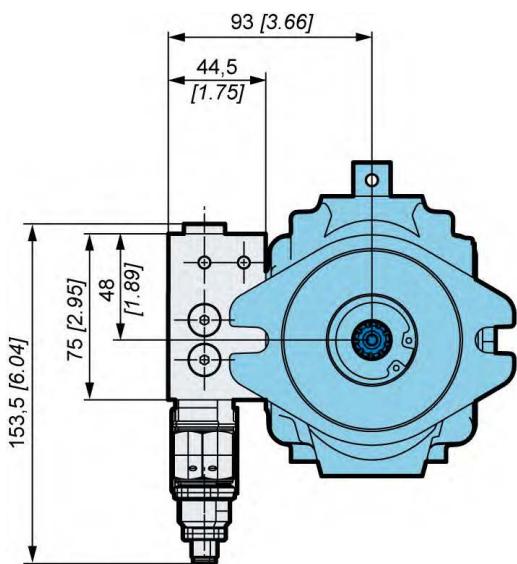

(To brake)

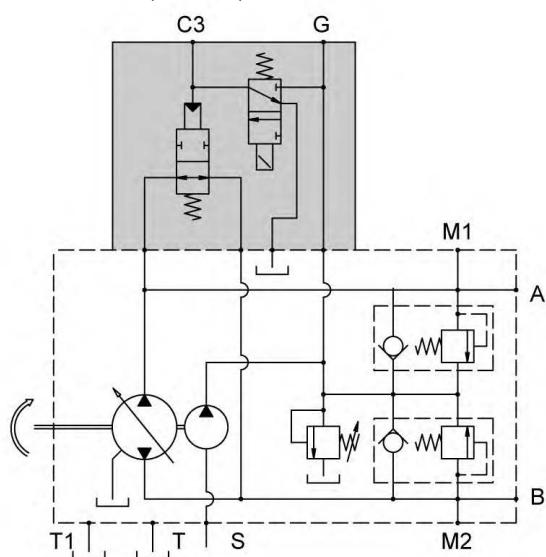

Type of connector: DIN 43650

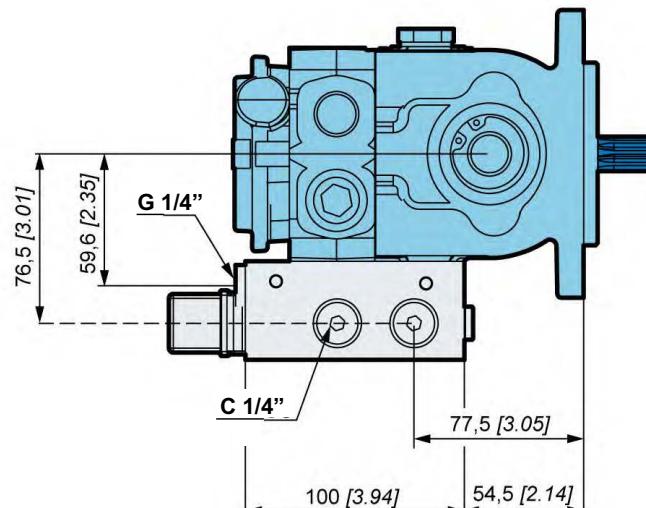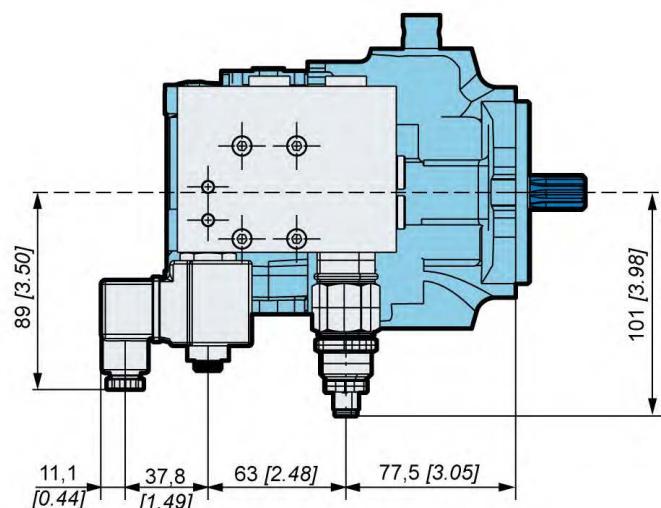



Roller bearing



It is an optional high capacity bearing.

Depending on the characteristics of the shaft load, the duty cycle of the application and the expected life time of your application, Roller bearing might be needed.



Consult your Poclain Hydraulics application engineer.

Fluorinated elastomer seals



Standard NBR sealing are designed to resist to temperature up to 90°C [194°F] and to HV type oils.

If your application is outside these limits, Fluorinated elastomer seals might be recommended.

Consult your Poclain Hydraulics Application Engineer.

Model Code

Technical specifications

Operating Parameters


System design Parameters

Features

Controls

Options

UNF threads ports

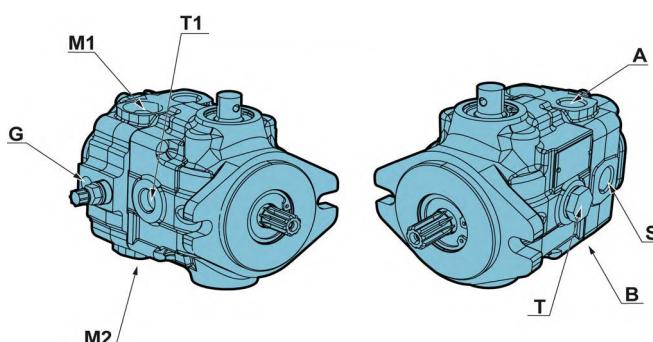

Port	Function	ISO 11926-1
A-B	Services	3/4-16 UNF-2B
G	Auxiliary	7/16-20 UNF-2B
M1/M2	Gauge	-
S	Suction	3/4-16 UNF-2B
T/T1	Drain	3/4-16 UNF-2B

Low noise valve plate





Special valve plate designed to reduce noise of the pump.

**Filter on suction line**

The max. pressure drop on the filtration element must not exceed 0,4 bar absolute [5.8 PSI absolute] (0,8 bar absolute [11.6 PSI absolute] with cold starting).

The "S" suction port can be orientated of 360°.

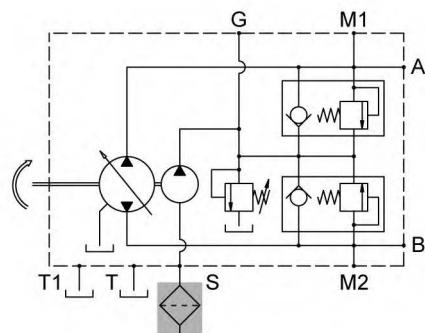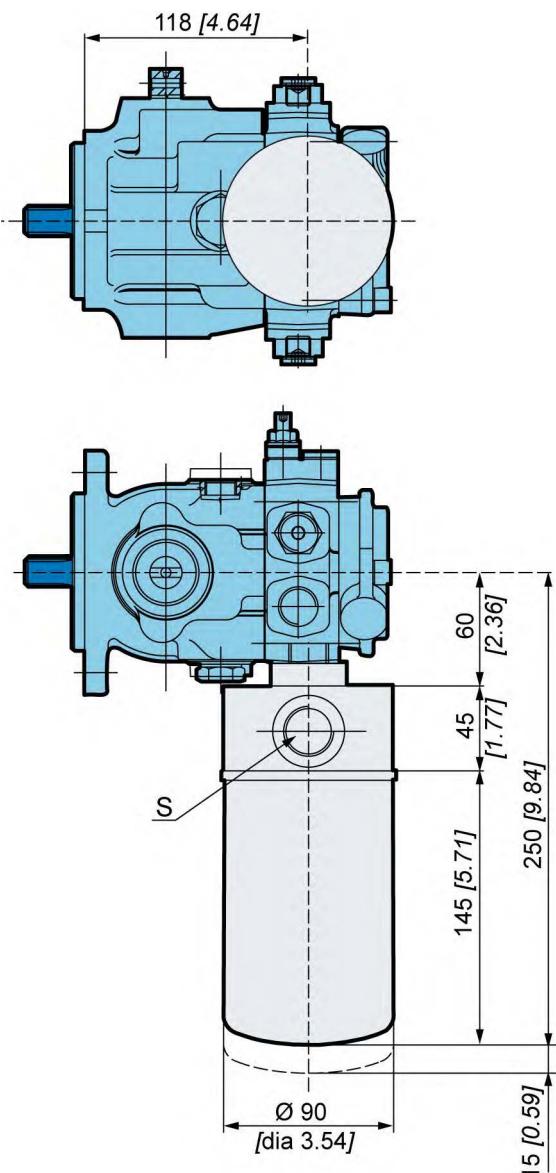





Filter on pressure line

The PMV0 pumps can have a pressure filter without clogging indicator (F0) or with clogging indicator (F2). The flow thru the filter is only the flow that entry in the close loop. The filter fitness is of 10 micron.

Max. working pressure: 10 bar [145 PSI].


Maximum pressure difference between filter cartridge input and output is 2 bar [29 PSI]. When reaching 2 bar [29 PSI], the cartridge has to be changed.

Tightening torque: 35 Nm [309 in.lbf].

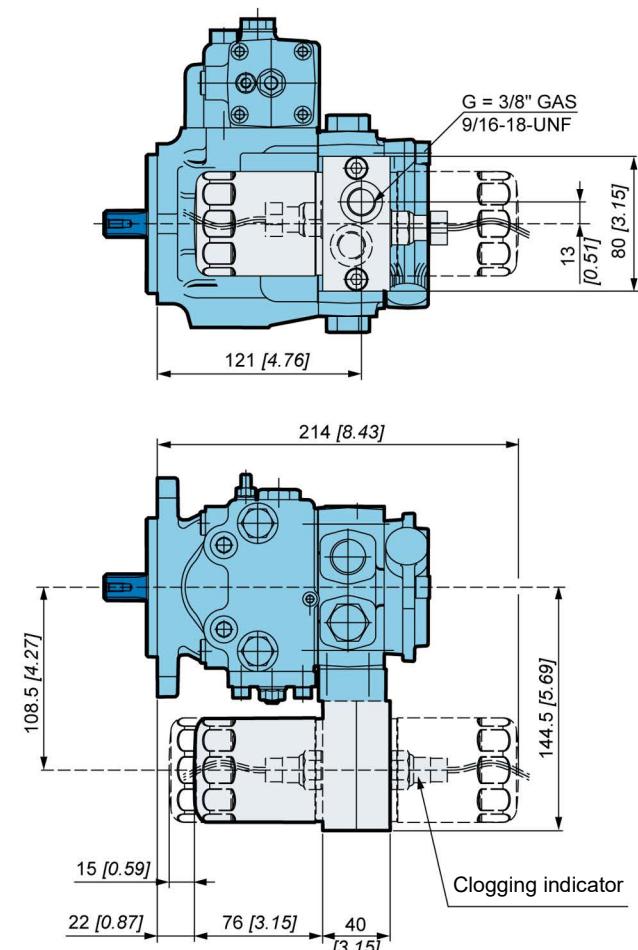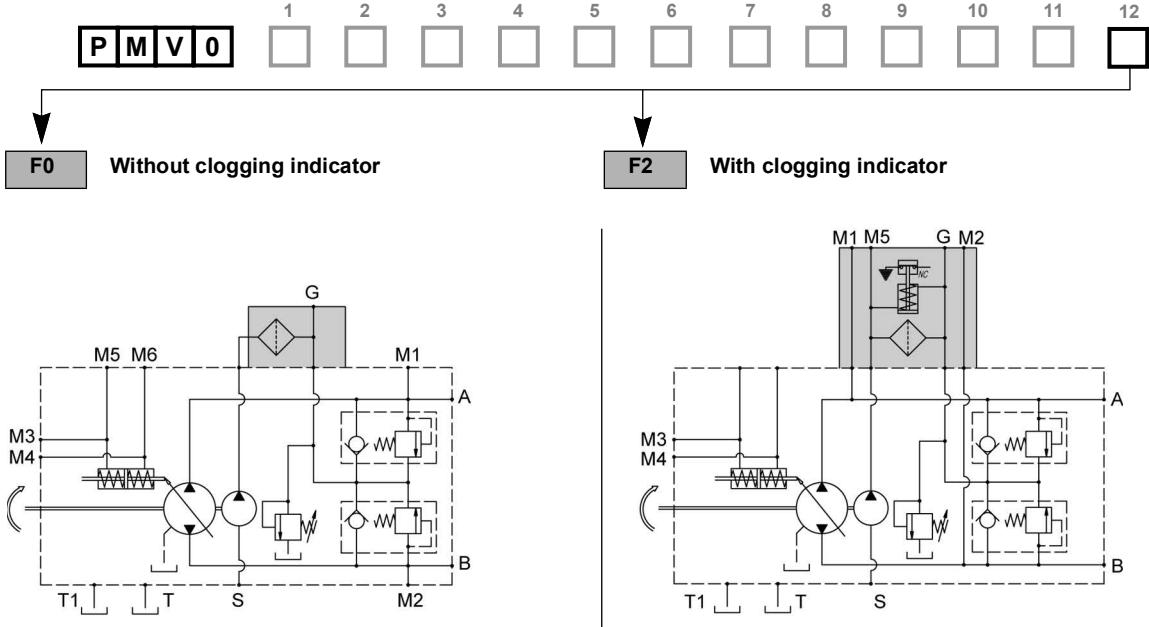

Clogging indicator specification

Differential working adjustment	3 ± 0,2 bar [44 ± 3 PSI]
Working temperature	-30°C ~ 110 °C [-22°F ~ 230°F]
Max. vibration level	50 g
Connector type	AMP super seal, 2 way
Current range	0,1-0,2 A max.



Normally closed contact.
Thread of the clogging indicator is internally connected to the ground.

Model Code

Technical specifications

Operating Parameters

System design Parameters

Features

Controls

Options



Swashplate on bushing




Swashplate mounted on bushing instead of bearing for lower noise working pump.

Flushing valve



Inside the pump cover, a flushing valve can be fitted with discharge inside the pump casing. The flushing valve is useful in case the temperature of the oil in the closed circuit is too high.

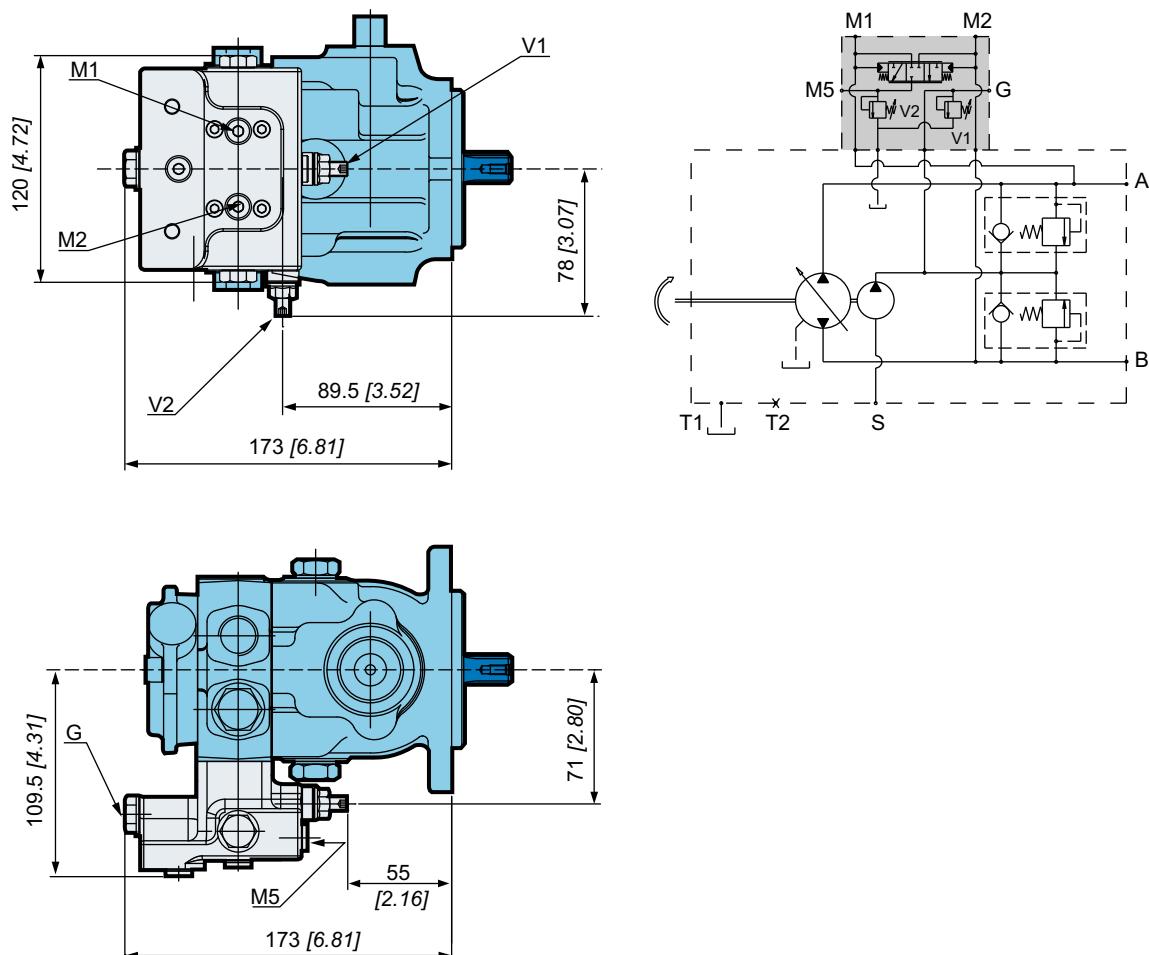

Consult your Poclain Hydraulics application engineer for more info.



Pressure gauge ports on relief valve

PMV0	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	<input type="checkbox"/> 6	<input type="checkbox"/> 7	<input type="checkbox"/> 8	<input type="checkbox"/> 9	<input type="checkbox"/> 10	<input type="checkbox"/> 11	PP 12
-------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	-----------------------------	-----------------------------	--------------

Pressure port for pressure measurement.

Finishing coat

PMV0	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	<input type="checkbox"/> 6	<input type="checkbox"/> 7	<input type="checkbox"/> 8	<input type="checkbox"/> 9	<input type="checkbox"/> 10	<input type="checkbox"/> 11	PA 12
-------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	-----------------------------	-----------------------------	--------------

The pumps can be delivered with finishing coat when requested. Standard paint is RAL 9005 (black color).



Consult your Poclain Hydraulics application engineer for other colors of topcoat.

Customized identification plate

PMV0	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	<input type="checkbox"/> 6	<input type="checkbox"/> 7	<input type="checkbox"/> 8	<input type="checkbox"/> 9	<input type="checkbox"/> 10	<input type="checkbox"/> 11	DP 12
-------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	-----------------------------	-----------------------------	--------------

It is possible to provide our products with dedicated plate (your part number engraved on the plate) when requested.



This option is available only for minimum volume of 50 pieces.





Consult your Poclain Hydraulics application engineer for other possibilities.

Setting max. displacement

PMV0	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	<input type="checkbox"/> 6	<input type="checkbox"/> 7	<input type="checkbox"/> 8	<input type="checkbox"/> 9	<input type="checkbox"/> 10	<input type="checkbox"/> 11	RC 12
-------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	----------------------------	-----------------------------	-----------------------------	--------------

Two setting screw permit the adjustment of the max. displacement for controls M/ N/ L. This option is useful for tandem to control straight of the machine.

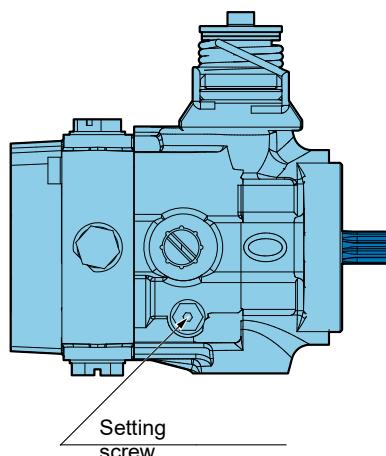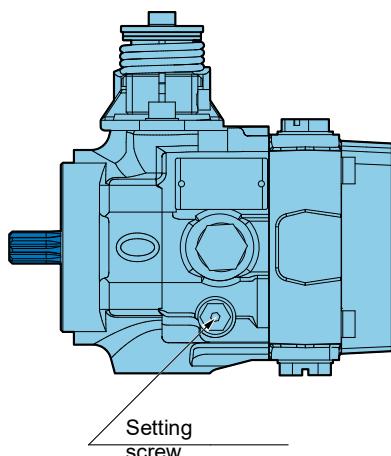

Model Code

Technical specifications

Operating Parameters

System design Parameters

Features

Controls

Options




Fitting for rear power take off

P	M	V	0	1	2	3	4	5	6	7	8	9	10	11	12	PU
----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	-----------	-----------	-----------	-----------

Special version with thru shaft for torque transmission: the input power is divided into hydraulic flow and mechanical torque



For dimensions of input and output shaft please contact
Poclain Hydraulics technical department.

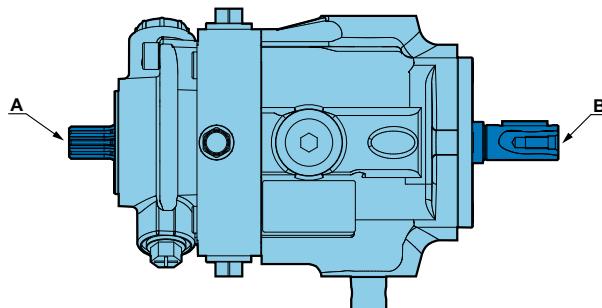

Special execution

P	M	V	0	1	2	3	4	5	6	7	8	9	10	11	12	ES
----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	-----------	-----------	-----------	-----------

Special execution and incorporate all the note that are not included in the defined options. Example of ES are: valve plate timing, assembly specifications, test conditions, ...



Consult your Poclain Hydraulics application engineer for
other possibilities.

Ball bearing

P	M	V	0	1	2	D2	or	S2	3	4	5	6	7	8	9	10	11	12	CM
----------	----------	----------	----------	----------	----------	-----------	-----------	-----------	----------	----------	----------	----------	----------	----------	----------	-----------	-----------	-----------	-----------


The shafts D2 and S2 are suggested for radial load because combined with bigger ball bearing (respect the standard one).



Auxiliary function




A special charge pump of 4,5cc/rev permit an auxiliary function with max. pressure of 60 bar [870 PSI]. It is mandatory for user to install a relief valve in the auxiliary circuit as max. 60 bar [870 PSI].

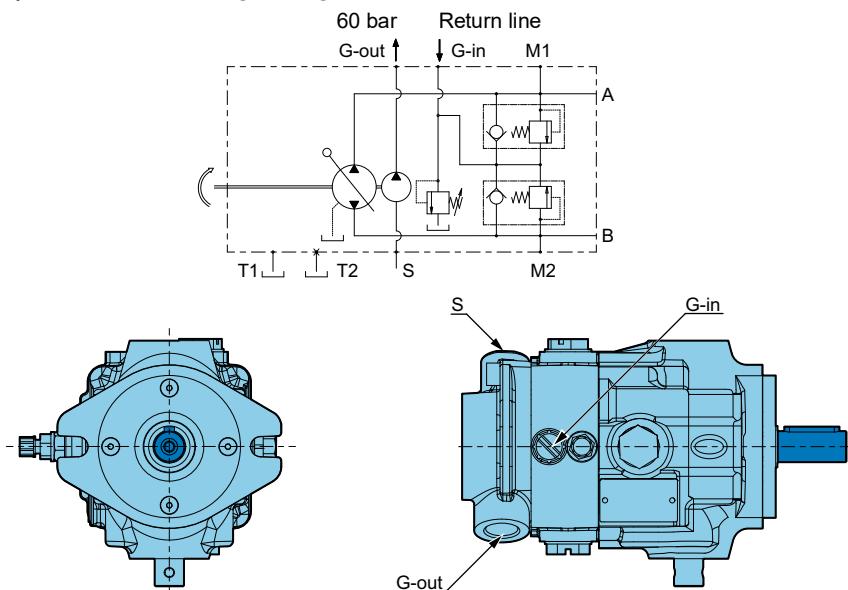

Twin ports



With option TP, main ports A/B are on same side (twin) of pump cover.

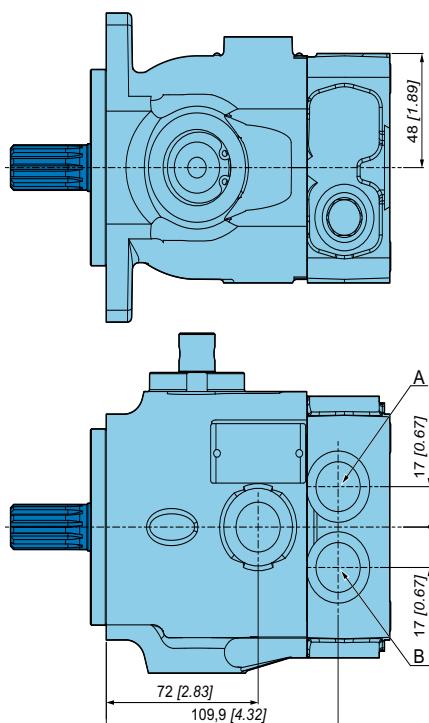

Model Code

Technical specifications

Operating Parameters



System design Parameters

Features

Controls

Options







Poclamp Hydraulics reserves the right to make any modifications it deems necessary to the products described in this document without prior notification. The information contained in this document must be confirmed by Poclamp Hydraulics before any order is submitted.

Illustrations are not binding.

The Poclamp Hydraulics brand is the property of Poclamp Hydraulics S.A.

 07/07/2025

 Not available

 A35764Z

 Not available

 Not available

 Not available

 B33980J

 Not available

 Not available



www.poclamp.com