




# PN014A

PN-010-RBR14-QFPKG/US/3D IV



Pressure sensors

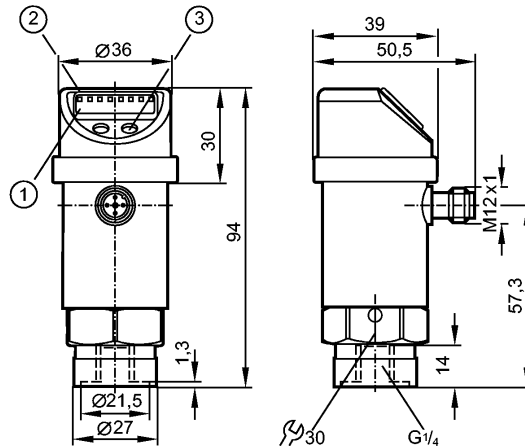

- 1: 4-digit alphanumeric display
- 2: LEDs (display unit / switching status)
- 3: Programming button



## Product characteristics

Electronic pressure monitor

Quick disconnect

Function programmable

ATEX approval

Group II, category 3D

Process connection: G 1/4 I

2 outputs

OUT1 = switching output

OUT2 = switching output or diagnostic output

4-digit alphanumeric display

Measuring range: -1...10 bar / -14.5...145 psi / -0.1...1.0 MPa

## Application

Application	Type of pressure: relative pressure Liquids and gases		
Pressure rating	75 bar	1087 psi	7.5 MPa
Bursting pressure min.	150 bar	2175 psi	15 MPa
Medium temperature [°C]	-20...60		

## Electrical data

Electrical design	DC PNP/NPN
Operating voltage [V]	18...36 DC <sup>1)</sup>
Current consumption [mA]	< 50
Protection class	III
Reverse polarity protection	yes
Overvoltage protection [V]	up to 40 V

## Outputs

Output	2 outputs OUT1 = switching output OUT2 = switching output or diagnostic output
Output function	2 x normally open / closed programmable or 1 x normally open / closed programmable + 1 x normally closed (diagnostic function)
Current rating [mA]	250



# PN014A

PN-010-RBR14-QFPKG/US/3D /V



Pressure sensors

Voltage drop	[V]	< 2
Short-circuit protection		yes (non-latching)
Switching frequency	[Hz]	≤ 170

Measuring / setting range			
Measuring range	-1...10 bar	-14.5...145 psi	-0.1...1.0 MPa
Setting range			
Set point, SP	-0.90...10.00 bar	-12...145 psi	-0.090...1.000 MPa
Reset point, rP	-0.95...9.95 bar	-13...144 psi	-0.095...0.995 MPa
in steps of	0.05 bar	1 psi	0.005 MPa
Factory setting	SP1 = 2.50 bar; rP1 = 2.30 bar SP2 = 7.50 bar; rP2 = 7.30 bar		

Accuracy / deviations	
Accuracy / deviations (in % of the span)	
Switch point accuracy	< ± 0.5
Characteristics deviation *)	< ± 0.25 (BFSL) / < ± 0.5 (LS)
Hysteresis	< ± 0.25
Repeatability **)	< ± 0.1
Long-term stability ***)	< ± 0.05
Temperature coefficients (TEMPCO) in the temperature range 0...60° C (in % of the span per 10 K)	
Greatest TEMPCO of the zero point	0.2
Greatest TEMPCO of the span	0.2

Reaction times	
Power-on delay time	[s] 0.3
Delay time programmable dS, dr	[s] 0; 0.2...50
Integrated watchdog	yes

Software / programming	
Programming options	hysteresis / window function; N.O. / N.C; diagnostic function; output polarity; on delay, off delay; damping; display unit

Interfaces	
IO-Link Device	
Transfer type	COM2 (38.4 kBaud)
IO-Link revision	1.1
SDCI standard	IEC 61131-9 CDV
IO-Link Device ID	311 d / 00 01 37 h
Profiles	no profile
SIO mode	yes
Required master port class	A
Process data analogue	1
Process data binary	2
Min. process cycle time	[ms] 2.3

Environment	
Ambient temperature	[°C] -20...60
Storage temperature	[°C] -40...100
Protection	IP 65

## Tests / approvals



# PN014A

PN-010-RBR14-QFPKG/US/3D /V



Pressure sensors

Marking of the unit	Ⓔ II 3D Ex tc IIIC T80°C Dc X	
EMC	EN 61000-4-2 ESD:	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated:	10 V/m
	EN 61000-4-4 Burst:	2 kV
	EN 61000-4-5 Surge:	0.5/1 kV
	EN 61000-4-6 HF conducted:	10 V
Shock resistance	DIN IEC 68-2-27:	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6:	20 g (10...2000 Hz)
MTTF [Years]	194	

Mechanical data		
Process connection	G ¼ I	
Materials (wetted parts)	stainless steel (303S22); ceramics; FPM (Viton)	
Housing materials	stainless steel (304S15); stainless steel 316L / 1.4404; PC (Makrolon); PEI; FPM (Viton); EPDM/X (Santoprene); PTFE	
Switching cycles min.	100 million	
Weight [kg]	0.302	

Displays / operating elements		
Display	Display unit	3 x LED green
	Switching status	2 x LED yellow
	Function display	4-digit alphanumeric display
	Measured values	4-digit alphanumeric display

Electrical connection		
Connection	M12 connector; gold-plated contacts	

## Wiring



### Programming of the output function

-----OUT1-----

Hno = hysteresis / normally open  
Hnc = hysteresis / normally closed  
Fno = window function / normally open  
Fnc = window function / normally closed

-----OUT2-----

Hno = hysteresis / normally open  
Hnc = hysteresis / normally closed  
Fno = window function / normally open  
Fnc = window function / normally closed  
dESI = diagnostic function (normally closed)



Remarks		
Remarks	1) to EN50178, SELV, PELV *) BFSL = Best Fit Straight Line / LS = Limit Value Setting **) with temperature fluctuations < 10 K ***) in% of the span / 6 months	
Pack quantity [piece]	1	