


PP0523

PP-025-RBG14-QFNKG/US/ IV

Pressure sensors

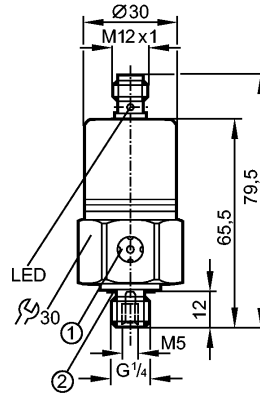

- 1: ventilation
- 2: sealing FPM / DIN 3869-14



Product characteristics

Electronic pressure sensor
Adjustment of the switch point by teach function
Process connection: G ¼ A / M5 I
2 outputs OUT1 = switching output OUT2 = switching output or diagnostic output
Measuring range: 0...25 bar / 0...363 psi / 0...2.5 MPa

Application

Application	Type of pressure: relative pressure Liquids and gases		
Pressure rating	150 bar	2175 psi	15 MPa
Bursting pressure min.	350 bar	5075 psi	35 MPa
Medium temperature [°C]	-25...90		

Electrical data

Electrical design	DC NPN
Operating voltage [V]	9.6...36 DC 1)
Current consumption [mA]	< 45
Insulation resistance [MΩ]	> 100 (500 V DC)
Protection class	III
Reverse polarity protection	yes

Outputs

Output	2 outputs OUT1 = switching output OUT2 = switching output or diagnostic output
Output function	2 x normally open / closed programmable or 1 x normally open / closed programmable + 1 x normally closed (diagnostic function)
Current rating [mA]	2 x 250
Voltage drop [V]	< 2
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	170

Measuring / setting range



PP0523

PP-025-RBG14-QFNKG/US/ /V

Pressure sensors

Measuring range	0...25 bar	0...363 psi	0...2.5 MPa
Setting range			
Set point, SP	0.2...25.0 bar	4...362 psi	0.02...2.50 MPa
Reset point, rP	0.1...24.9 bar	2...360 psi	0.01...2.49 MPa
in steps of	0.1 bar	2 psi	0.01 MPa
Factory setting	SP1 = 6.3 bar; rP1 = 5.8 bar SP2 = 18.8 bar; rP2 = 18.3 bar OUT1 = Hno; OUT2 = Hno		

Accuracy / deviations

Accuracy / deviations (in % of the span)	
Switch point accuracy	< ± 0.5
Characteristics deviation *)	< ± 0.25 (BFSL) / < ± 0.5 (LS)
Hysteresis	< ± 0.1
Repeatability **)	< ± 0.1
Long-term stability ***)	< ± 0.1
Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)	
Greatest TEMPCO of the zero point	0.2
Greatest TEMPCO of the span	0.2

Reaction times

Power-on delay time [s]	0.3
Min. response time switching output [ms]	3
Damping for the switching output (dAP) [s]	0.003 - 0.006 - 0.010 - 0.017 - 0.060 - 0.125 - 0.250 - 0.500

Environment

Ambient temperature [°C]	-25...85
Storage temperature [°C]	-40...100
Protection	IP 68 ****) / IP 69K

Tests / approvals

EMC	noise immunity	according to EN 61000-6-2 4 kV contact discharge / 15 kV air discharge
	EN 61000-4-2 ESD:	20 V/m
	EN 61000-4-3 HF radiated:	4 kV coupling clamp
	EN 61000-4-4 Burst:	0.5 kV supply / 1 kV signal for DC units
	EN 61000-4-5 Surge:	30 V
	EN 61000-4-6 HF conducted:	
Shock resistance	DIN IEC 60068-2-27 / DIN IEC 60068-2-29:	1000 g
	DIN EN 61373:	Category 3
Vibration resistance	DIN IEC 68-2-6:	20 g (10...2000 Hz)
	DIN EN 60068-2-64	14 g
	DIN EN 61373:	Category 2
MTTF [Years]		309

Mechanical data

Process connection	G ¼ A / M5 I
Materials (wetted parts)	stainless steel (303S22); ceramics; FPM (Viton)
Housing materials	stainless steel (304S15); FPM (Viton); EPDM/X (Santoprene); PA

PP0523

PP-025-RBG14-QFNKG/US/ /V

Pressure sensors

Switching cycles min.	100 million
Weight [kg]	0.227

Displays / operating elements


Display	Power 2 x LED green Switching status 2 x LED yellow
---------	--

Electrical connection

Connection	M12 connector
------------	---------------

Wiring

-----OUT1/Teach/Data-----
data channel for bidirectional communication
in addition:
switching signal for pressure limit value or
input for teach signal
-----OUT2-----
switching signal for pressure limit value or
diagnostic signal

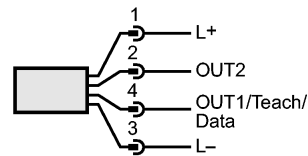

Remarks

Remarks	<p>1) supply voltage for communication mode: 18...32 V DC *) BFSL = Best Fit Straight Line / LS = Limit Value Setting **) with temperature fluctuations < 10 K ***) in % of the span per year *****) 7 days / 1 m water depth / 0.1 bar</p>
---------	--

Pack quantity [piece]	1
-----------------------	---