


PP7556

PP-2.5-RBG14-QFPKG/US/ IV

Pressure sensors

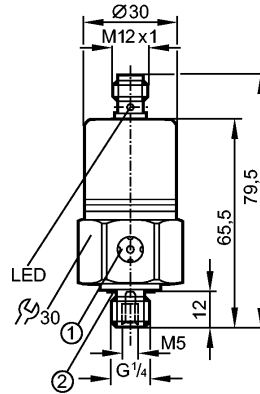

- 1: ventilation
- 2: sealing FPM / DIN 3869-14



Product characteristics

Electronic pressure sensor
Quick disconnect
Adjustment of the switch point by teach function
Process connection: G ¼ A / M5 I
2 outputs OUT1 = switching output OUT2 = switching output or diagnostic output
Measuring range: 0...2.5 bar / 0...36.3 psi / 0...250 kPa

Application

Application	Type of pressure: relative pressure Liquids and gases		
Pressure rating	20 bar	290 psi	2000 kPa
Bursting pressure min.	50 bar	725 psi	5000 kPa
Medium temperature [°C]	-25...90		

Electrical data

Electrical design	DC PNP
Operating voltage [V]	9.6...36 DC 1)
Current consumption [mA]	< 45
Insulation resistance [MΩ]	> 100 (500 V DC)
Protection class	III
Reverse polarity protection	yes

Outputs

Output	2 outputs OUT1 = switching output OUT2 = switching output or diagnostic output
Output function	2 x normally open / closed programmable or 1 x normally open / closed programmable + 1 x normally closed (diagnostic function)
Current rating [mA]	2 x 250
Voltage drop [V]	< 2
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	170

PP7556

PP-2.5-RBG14-QFPKG/US/ IV

Pressure sensors

Measuring / setting range			
Measuring range	0...2.5 bar	0...36.3 psi	0...250 kPa
Setting range			
Set point, SP	0.02...2.50 bar	0.4...36.2 psi	2...250 kPa
Reset point, rP	0.01...2.49 bar	0.2...36 psi	1...249 kPa
in steps of	0.01 bar	0.2 psi	1 kPa
Factory setting	SP1 = 0.63 bar; rP1 = 0.58 bar SP2 = 1.88 bar; rP2 = 1.83 bar OUT1 = Hno; OUT2 = Hno		
Accuracy / deviations			
Accuracy / deviations (in % of the span)			
Switch point accuracy	< ± 0.5		
Characteristics deviation *)	< ± 0.25 (BFSL) / < ± 0.5 (LS)		
Hysteresis	< ± 0.1		
Repeatability **)	< ± 0.1		
Long-term stability ***)	< ± 0.1		
Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)			
Greatest TEMPCO of the zero point	0.2		
Greatest TEMPCO of the span	0.2		
Reaction times			
Power-on delay time [s]	0.3		
Min. response time switching output [ms]	3		
Damping for the switching output (dAP) [s]	0.003 - 0.006 - 0.010 - 0.017 - 0.060 - 0.125 - 0.250 - 0.500		
Interfaces			
IO-Link Device			
Transfer type	COM2 (38.4 kBaud)		
IO-Link revision	1.0		
IO-Link Device ID	7 d / 00 00 07 h		
Profiles	no profile		
SIO mode	yes		
Required master port class	A		
Process data analogue	1		
Process data binary	2		
Min. process cycle time [ms]	2.3		
Environment			
Ambient temperature [°C]	-25...85		
Storage temperature [°C]	-40...100		
Protection	IP 68 ****) / IP 69K		
Tests / approvals			
EMC	noise immunity EN 61000-4-2 ESD: EN 61000-4-3 HF radiated: EN 61000-4-4 Burst:	according to EN 61000-6-2 4 kV contact discharge / 15 kV air discharge 20 V/m 4 kV coupling clamp	

PP7556

PP-2.5-RBG14-QFPKG/US/ IV

Pressure sensors

	EN 61000-4-5 Surge: EN 61000-4-6 HF conducted: noise immunity Absorber chamber test to ISO 11452-2: EN 50155:	0.5 kV supply / 1 kV signal for DC units 10 V according to the automotive directive 95/54/EC / 04/104EC / 05/83/EC 80 V/m class T3, C1, S1
Shock resistance	DIN IEC 60068-2-27 / DIN IEC 60068-2-29: DIN EN 61373:	1000 g Category 3
Vibration resistance	DIN IEC 68-2-6: DIN EN 60068-2-64 DIN EN 61373:	20 g (10...2000 Hz) 14 g Category 2
MTTF	[Years]	310

Mechanical data

Process connection	G ¼ A / M5 I
Materials (wetted parts)	stainless steel (303S22); ceramics; FPM (Viton)
Housing materials	stainless steel (304S15); FPM (Viton); EPDM/X (Santoprene); PA
Switching cycles min.	100 million
Weight	[kg] 0.227

Displays / operating elements


Display	Power 2 x LED green Switching status 2 x LED yellow
---------	--

Electrical connection

Connection	M12 connector
------------	---------------

Wiring

-----OUT1/Teach/Data-----
data channel for bidirectional communication
in addition:
switching signal for pressure limit value or input for teach signal
-----OUT2-----
switching signal for pressure limit value or diagnostic signal

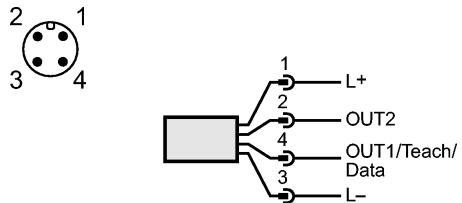

Remarks

Remarks	1) supply voltage for communication mode: 18...32 V DC referring to UL: "limited voltage" with overcurrent protection in accordance with UL508 *) BFSL = Best Fit Straight Line / LS = Limit Value Setting **) with temperature fluctuations < 10 K ***) in % of the span per year ****) 7 days / 1 m water depth / 0.1 bar e1 approval on request
---------	---

Pack quantity	[piece] 1
---------------	-----------