




# PS3607

SUBMERSIBLE 0.6BAR 30M PUR CABLE



Pressure sensors

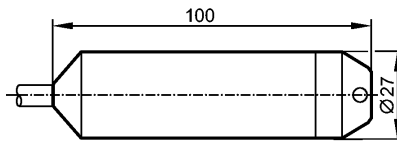

## Product characteristics

Submersible pressure transmitter

Cable

Cable

with capillary tube for pressure compensation

Analog output

Measuring range: 0...0.6 bar

## Application

Application	Type of pressure: relative pressure Liquids
Pressure rating [bar]	4
Bursting pressure min. [bar]	4.8
Medium temperature [°C]	-10...50

## Electrical data

Electrical design	DC
Operating voltage [V]	10...30 DC
Protection class	III
Reverse polarity protection	yes

## Outputs

Output	Analog output
Output function	4...20 mA analog
Short-circuit protection	yes
Analog output	4...20 mA
Max. load [Ω]	max. (U <sub>b</sub> - 10 V) x 50; 700 (U <sub>b</sub> = 24 V)

## Measuring / setting range

Measuring range [bar]	0...0.6
-----------------------	---------

## Accuracy / deviations

Accuracy / deviations (in % of the span)	
Characteristics deviation *)	< 0.25 (BFSL) / 0.5 ****)
Linearity	< 0.2 (BFSL)
Repeatability **)	< 0.1
Long-term stability ***)	< 0.2
Temperature coefficients (TEMPCO) in the temperature range 0...50° C (in % of the span per 10 K)	
Greatest TEMPCO of the zero point	< ± 0.2
Greatest TEMPCO of the span	< ± 0.2

## Environment

Ambient temperature [°C]	-10...50
Storage temperature [°C]	-30...80
Protection	IP 68

## Tests / approvals



# PS3607

SUBMERSIBLE 0.6BAR 30M PUR CABLE

Pressure sensors

MTTF	[Years]	732
------	---------	-----

### Mechanical data


Housing materials	stainless steel 316Ti / 1.4571; PA	
Min. pressure cycles		
Weight	[kg]	2.38

### Electrical connection

Connection	PUR cable / 30 m; wire insulation PVC, cable diameter 7.5 mm	
------------	--	--

#### Wiring

Core colors  
 BN brown  
 GY grey  
 WH white



### Remarks

Remarks	<p>*) BFSL = Best Fit Straight Line          **) with temperature fluctuations &lt; 10 K          ***) in % of the span per year          ****) incl. linearity, zero and span error (limit value setting)</p>
---------	--

Pack quantity	[piece]	1
---------------	---------	---