




PS4408

SUBMERSIBLE 0.25BAR 10M FEP CABLE



Pressure sensors

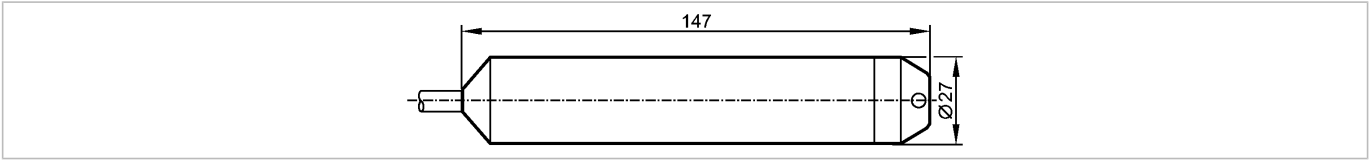

CE

Product characteristics

Submersible pressure transmitter

Cable

with capillary tube for pressure compensation

Analog output

Measuring range: 0...0.25 bar

Application

Application	Type of pressure: relative pressure Liquids
Pressure rating [bar]	2
Bursting pressure min. [bar]	2.4
Medium temperature [°C]	-10...85

Electrical data

Electrical design	DC
Operating voltage [V]	10...30 DC
Protection class	III
Reverse polarity protection	yes

Outputs

Output	Analog output
Output function	4...20 mA analog
Short-circuit protection	yes
Analog output	4...20 mA
Max. load [Ω]	max. (U _b - 10 V) x 50; 700 (U _b = 24 V)

Measuring / setting range

Measuring range [bar]	0...0.25
-----------------------	----------

Accuracy / deviations

Accuracy / deviations (in % of the span)	
Characteristics deviation *)	< 0.25 (BFSL) / 0.5 ****)
Linearity	< 0.2 (BFSL)
Repeatability **)	< 0.1
Long-term stability ***)	< 0.2
Temperature coefficients (TEMPCO) in the temperature range 0...50° C (in % of the span per 10 K)	
Greatest TEMPCO of the zero point	< ± 0.2
Greatest TEMPCO of the span	< ± 0.2

Environment

Ambient temperature [°C]	-10...85
Storage temperature [°C]	-30...80
Protection	IP 68

Mechanical data

Housing materials	stainless steel 316Ti / 1.4571; PA
-------------------	------------------------------------



PS4408

SUBMERSIBLE 0.25BAR 10M FEP CABLE

Pressure sensors

Min. pressure cycles	
Weight [kg]	0.996

Electrical connection


Connection	FEP cable / 10 m; cable diameter 7.5 mm
------------	---

Wiring

Core colors

BN brown

GN green



1: screen (connected to the housing)

Remarks

Remarks	<p>*) BFSL = Best Fit Straight Line **) with temperature fluctuations < 10 K ***) in % of the span per year ****) incl. linearity, zero and span error (limit value setting)</p>
---------	--

Pack quantity [piece]	1
-----------------------	---