


**PX3244**

PA-015PRBN14-A-ZVG/US/ /V

Pressure sensors

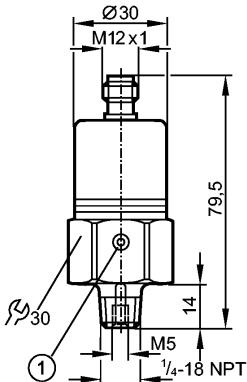

1: ventilation

**Product characteristics**

Electronic pressure sensor

Quick disconnect

e1 compliant

Process connection: 1/4" NPT A / M5 I

Analog output

Measuring range: 0...150 psi

Application

| | |
|------------------------------|--|
| Application | Type of pressure: relative pressure Liquids and gases |
| Pressure rating [psi] | 1087 |
| Bursting pressure min. [psi] | 2175 |
| Medium temperature [°C] | -25...90 |

Electrical data

| | |
|-----------------------------|------------------|
| Electrical design | DC |
| Operating voltage [V] | 9.6..32 DC |
| Insulation resistance [MΩ] | > 100 (500 V DC) |
| Protection class | III |
| Reverse polarity protection | yes |

Outputs

| | |
|---------------------|-------------------------------------|
| Output | Analog output |
| Output function | 4...20 mA |
| Overload protection | yes |
| Max. load [Ω] | (Ub - 9.6 V) x 50; 720 at Ub = 24 V |

Measuring / setting range

| | |
|-----------------------|---------|
| Measuring range [psi] | 0...150 |
|-----------------------|---------|

Accuracy / deviations

| | |
|---|---------------------------------|
| Accuracy / deviations (in % of the span) | < ± 0.35 (BFSL) / < ± 0.75 (LS) |
| Characteristics deviation *) | < ± 0.35 (BFSL) / < ± 0.75 (LS) |
| Repeatability **) | < 0.15 |
| Long-term stability ***) | < ± 0.05 |

Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)

PX3244

PA-015PRBN14-A-ZVG/US/ /V

Pressure sensors

| | | |
|------------------------------------|---------|---|
| Greatest TEMPCO of the zero point | | 0.2 |
| Greatest TEMPCO of the span | | 0.3 |
| Reaction times | | |
| Step response time analogue output | [ms] | 3 |
| Environment | | |
| Ambient temperature | [°C] | -25...80 |
| Storage temperature | [°C] | -40...100 |
| Protection | | IP 65 |
| Tests / approvals | | |
| EMC | | EN 61000-4-2 ESD: 4 kV CD / 8 kV AD EN 61000-4-3 HF radiated: 30 V/m EN 61000-4-4 Burst: 2 kV EN 61000-4-6 HF conducted: 10 V according to the automotive directive 2004/104/EC / CISPR25 radiation of interference according to the automotive directive 2004/104/EC / ISO 11452-2 noise immunity 100 V/m HF radiated according to ISO7637-2 / severity level 3 pulse resistance |
| Shock resistance | | DIN IEC 68-2-27: 50 g (11 ms) |
| Vibration resistance | | DIN IEC 68-2-6: 20 g (10...2000 Hz) |
| Mechanical data | | |
| Process connection | | 1/4" NPT A / M5 I |
| Materials (wetted parts) | | stainless steel (303S22); ceramics; FPM (Viton) |
| Housing materials | | stainless steel 316L / 1.4404; FPM (Viton); PA; EPDM/X (Santoprene) |
| Min. pressure cycles | | 100 million |
| Weight | [kg] | 0.215 |
| Electrical connection | | |
| Connection | | M12 connector; gold-plated contacts |
| Wiring | | |
| 2 1 3 4 | | |
| Remarks | | |
| Remarks | | *) incl. linearity, zero and span error (limit value setting) **) with temperature fluctuations < 10 K ***) in % of value of measuring range / 6 months |
| Pack quantity | [piece] | 1 |