


# PX9020

PA-400-SBR14-B-DVG/US/ /V

Pressure sensors

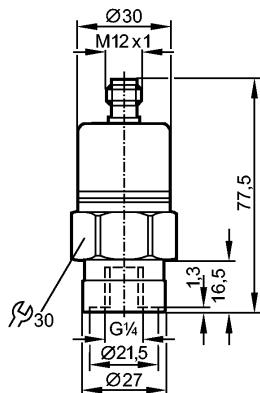

CE

## Product characteristics

Electronic pressure sensor

Quick disconnect

e1 compliant

Process connection: G 1/4 I

Analog output

Measuring range: 0...400 bar

## Application

Application

Type of pressure: relative pressure

Liquids and gases

For gaseous media the application is limited to max. 25 bar

Pressure rating [bar]

600

Bursting pressure min. [bar]

1000

Medium temperature [°C]

-25...90 \*\*\*\*)

## Electrical data

Electrical design

DC

Operating voltage [V]

10...30 DC

Current consumption [mA]

< 18

Insulation resistance [MΩ]

> 100 (500 V DC)

Protection class

III

Reverse polarity protection

yes

## Outputs

Output

Analog output

Output function

analog

Overload protection

yes

Analog output

0.5...4.5 V

Max. load [Ω]

min. 2000

## Measuring / setting range

Measuring range [bar]

0...400

## Accuracy / deviations

Accuracy / deviations  
(in % of the span)

< ± 0.25 (BFSL) / < ± 0.5 (LS)

Characteristics deviation \*)

< 0.1

Repeatability \*\*)



# PX9020

PA-400-SBR14-B-DVG/US/ /V



Pressure sensors

Long-term stability ***)	< ± 0.05	
Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)		
Greatest TEMPCO of the zero point		0.4
Greatest TEMPCO of the span		0.4
<b>Reaction times</b>		
Step response time analogue output	[ms]	3
<b>Environment</b>		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection		IP 68 / IP 69K
<b>Tests / approvals</b>		
EMC		EN 61000-4-2 ESD: 4 kV CD / 8 kV AD EN 61000-4-3 HF radiated: 30 V/m EN 61000-4-4 Burst: 2 kV EN 61000-4-6 HF conducted: 10 V
Shock resistance		DIN IEC 68-2-27: 50 g (11 ms)
Vibration resistance		DIN IEC 68-2-6: 20 g (10...2000 Hz)
<b>Mechanical data</b>		
Process connection		G 1/4 I
Materials (wetted parts)		stainless steel (303S22); ceramics; FPM (Viton)
Housing materials		stainless steel 316L / 1.4404; FPM (Viton); PA; EPDM/X (Santoprene)
Min. pressure cycles		100 million
Weight	[kg]	0.222
<b>Electrical connection</b>		
Connection		M12 connector; gold-plated contacts
<b>Wiring</b>		
2 1 3 4		<pre> graph LR     subgraph Connector [M12 Connector]         direction TB         1 --&gt; Lplus         2 --&gt; Ground         3 --&gt; Lminus         4 --- Ground     end     Lplus --- LplusLabel[L+]     Ground --- GroundLabel[L-]     Lminus --- LminusLabel[L-] </pre>
<b>Remarks</b>		
Remarks	<p>*) BFSL = Best Fit Straight Line / LS = Limit Value Setting  **) with temperature fluctuations &lt; 10 K  ***) in % of value of measuring range / 6 months  ****) -40...90 °C upon request</p>	
Pack quantity	[piece]	1