




# PY9291

PN-250-SBR14-QFRKG/US/ /V



Pressure sensors

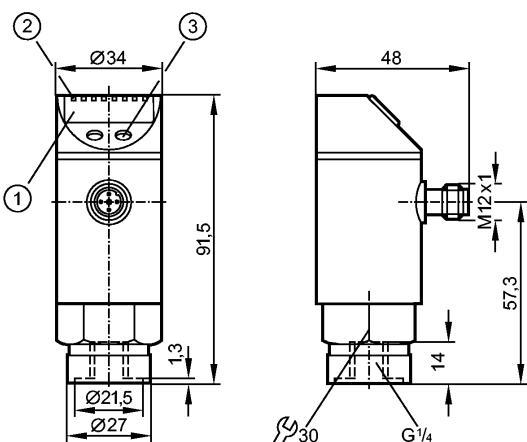

1: 4-digit alphanumeric display

2: LEDs (display unit / switching status)

3: Programming button

CE

## Product characteristics

Electronic pressure monitor

Quick disconnect

Function programmable

Process connection: G 1/4 I

2 outputs

OUT1 = switching output

OUT2 = switching output or diagnostic output

4-digit alphanumeric display

Measuring range: 0...250 bar / 0...3625 psi / 0...25 MPa

## Application

Application

Type of pressure: relative pressure

Liquids and gases

For gaseous media the application is limited to max. 25 bar

Pressure rating

400 bar

5800 psi

40 MPa

Bursting pressure min.

850 bar

12300 psi

85 MPa

Medium temperature

[°C]

-25..80

## Electrical data

Electrical design

DC PNP/NPN

Operating voltage [V]

18...36 DC<sup>1)</sup>

Current consumption [mA]

< 50

Insulation resistance [MΩ]

> 100 (500 V DC)

Protection class

III

Reverse polarity protection

yes

Oversupply protection [V]

up to 40 V

## Outputs

Output

2 outputs

OUT1 = switching output

OUT2 = switching output or diagnostic output

Output function

2 x normally open / closed programmable or 1 x normally open / closed programmable  
+ 1 x normally closed (diagnostic function)

Current rating [mA]

250



# PY9291

PN-250-SBR14-QFRKG/US/ /V



**Pressure sensors**

Voltage drop	[V]	< 2	
Short-circuit protection		yes (non-latching)	
Switching frequency	[Hz]	≤ 170	
<b>Measuring / setting range</b>			
Measuring range	0...250 bar	0...3625 psi	0...25 MPa
Setting range			
Set point, SP	2...250 bar	40...3620 psi	0.2...25.0 MPa
Reset point, rP	1...249 bar	20...3600 psi	0.1...24.9 MPa
in steps of	1 bar	20 psi	0.1 MPa
<b>Accuracy / deviations</b>			
Accuracy / deviations (in % of the span)			
Switch point accuracy		< ± 0.5	
Characteristics deviation *)		< ± 0.5	
Hysteresis		< ± 0.25	
Repeatability **)		< ± 0.1	
Long-term stability ***)		< ± 0.05	
Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)			
Greatest TEMPCO of the zero point		0.2	
Greatest TEMPCO of the span		0.2	
<b>Reaction times</b>			
Power-on delay time	[s]	0.3	
Delay time programmable dS, dr	[s]	0; 0.2...50	
Integrated watchdog		yes	
<b>Software / programming</b>			
Programming options		hysteresis / window function; N.O. / N.C; diagnostic function; output polarity; on delay, off delay; damping; display unit	
<b>Environment</b>			
Ambient temperature	[°C]	-20...80 (UB < 32 V) / -20...60 (UB > 32 V)	
Storage temperature	[°C]	-40...100	
Protection		IP 67	
<b>Tests / approvals</b>			
EMC		EN 61000-4-2 ESD: EN 61000-4-3 HF radiated: EN 61000-4-4 Burst: EN 61000-4-5 Surge: EN 61000-4-6 HF conducted:	4 kV CD / 8 kV AD 10 V/m 2 kV 0.5/1 kV 10 V
Shock resistance		DIN IEC 68-2-27:	50 g (11 ms)
Vibration resistance		DIN IEC 68-2-6:	20 g (10...2000 Hz)
MTTF	[Years]		219
<b>Mechanical data</b>			
Process connection		G ¼ I	
Materials (wetted parts)		stainless steel (303S22); ceramics; FPM (Viton)	
Housing materials		stainless steel (304S15); stainless steel 316L / 1.4404; PC (Makrolon); PBT (Pocan); PEI; FPM (Viton)	
Switching cycles min.		100 million	
Weight	[kg]	0.263	



# PY9291

PN-250-SBR14-QFRKG/US/ /V



Pressure sensors

## Displays / operating elements

Display

Display unit 3 x LED green  
Switching status 2 x LED yellow  
Function display 4-digit alphanumeric display  
Measured values 4-digit alphanumeric display

## Electrical connection

Connection

M12 connector; gold-plated contacts

## Wiring

Programming of the output function

-----OUT1-----

Hno = hysteresis / normally open  
Hnc = hysteresis / normally closed  
Fno = window function / normally open

Fnc = window function / normally closed

-----OUT2-----

Hno = hysteresis / normally open  
Hnc = hysteresis / normally closed  
Fno = window function / normally open



Fnc = window function / normally closed

dESI = diagnostic function (normally closed)

Factory setting:

OUT1 = Hno

OUT2 = dESI



## Remarks

Remarks

- <sup>1)</sup> to EN50178, SELV, PELV
- <sup>\*)</sup> linearity, incl. hysteresis and repeatability;  
(limit value setting to DIN 16086)
- <sup>\*\*) with temperature fluctuations < 10 K</sup>
- <sup>\*\*\*) in% of the span / 6 months</sup>

Pack quantity

[piece]

1