


2FFI stainless steel

Flat face couplings, ISO 16028, stainless steel

Flat face couplings, with stainless steel (AISI 316) components and seals in FKM (Viton). High resistance to corrosion. ISO 16028 interchangeable.



Applications

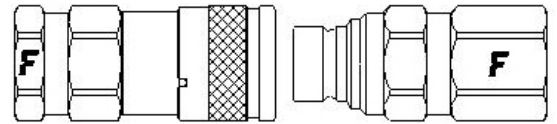

Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
1/4	25	20	0,006	95	100	100	100
3/8	25	45	0,008	115	100	100	100
1/2	25	100	0,01	220	100	100	100
3/4	25	160	0,02	215	100	100	100
1	25	210	0,03	280	100	100	100

Seals	FKM
Material	Stainless Steel
Valve Type	Flat
Working temperatures	-20 °C to 200 °C
Series Interchange	ISO 16028
Connection	Push to Connect
Disconnection	Sleeve Retraction
Connection Under Pressure	Not Allowed

