


2FSI - FFI

Sectors latching couplers. Size 1,1/2" - 2" - 3"

Flat face couplings equipped with sector latching system. High resistance to the Brinelling effect, provoked by high frequency impulse pressures. Available on 1", 1-1/2", 2" and 3" sizes. ISO 16028 interchange.



Applications

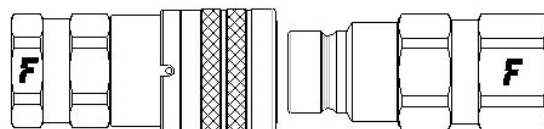

Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
1-1/2	25	500	0,05	345	120	100	125
2	25	1000	0,1	430	80	50	100
3	12	1150	0,1	520	80	50	80

Seals	NBR & PUR
Material	Steel
Valve Type	Flat
Working temperatures	-25 °C to 100 °C
Surface treatment	MATE 500 (CrIII)
Series Interchange	FASTER
Connection	Push to Connect
Disconnection	Sleeve Retraction
Connection Under Pressure	Not Allowed