


## 3FFI

### Flat face couplings, ISO 16028, connection under pressure

Flat face couplings, connectable under residual pressure. Max working pressure 25 MPa (3625 psi). ISO 16028 interchangeable.



### Applications

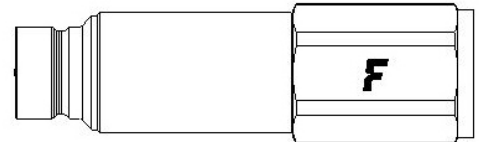

Seals	<b>NBR &amp; PUR</b>
Material	<b>Steel</b>
Valve Type	<b>Flat</b>
Working temperatures	<b>-25 °C to 100 °C</b>
Surface treatment	<b>MATE 500 (CrIII)</b>
Series Interchange	<b>ISO 16028</b>
Connection	<b>Push to Connect</b>
Disconnection	<b>Sleeve Retraction</b>
Connection Under Pressure	<b>Allowed Male Half up to W.P.</b>