


4SRPV

Push-pull female couplings for agriculture

Push-pull couplings, connectable under residual pressure in both male and female side. Can be screwed directly into valve ports or rigid pipes. Breakaway function. ISO 7241-1 part A interchangeable.



Applications

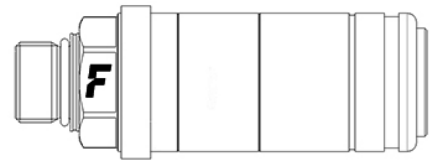

Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
1/2	25	70	2	250		100	100

Seals	HNBR
Material	Steel
Valve Type	Poppet
Working temperatures	-25 °C to 125 °C
Surface treatment	MATE 500 (CrIII)
Series Interchange	ISO 7241-A
Connection	Push to Connect
Disconnection	Pull to Disconnect
Connection Under Pressure	Allowed Both Halves up to W.P.

