


## CVLS

### Screw-to-connect coupling, safety sleeve

Screw-on couplings suitable for general purpose applications. Connectable under residual pressure. High resistance to pressure and flow impulses. Equipped with an additional safety sleeve to prevent accidental disconnections provoked by vibrations. Interchangeable according to ISO 14541 standard.




### Applications



Seals	<b>FKM</b>
Material	<b>Steel</b>
Valve Type	<b>Poppet</b>
Working temperatures	<b>-20 °C to 200 °C</b>
Surface treatment	<b>MATE 500 (CrIII)</b>
Series Interchange	<b>MARKET</b>
Connection	<b>Screw to Connect</b>
Disconnection	<b>Unscrew to Disconnect</b>
Connection Under Pressure	<b>Allowed Residual</b>

### Pressure Drop

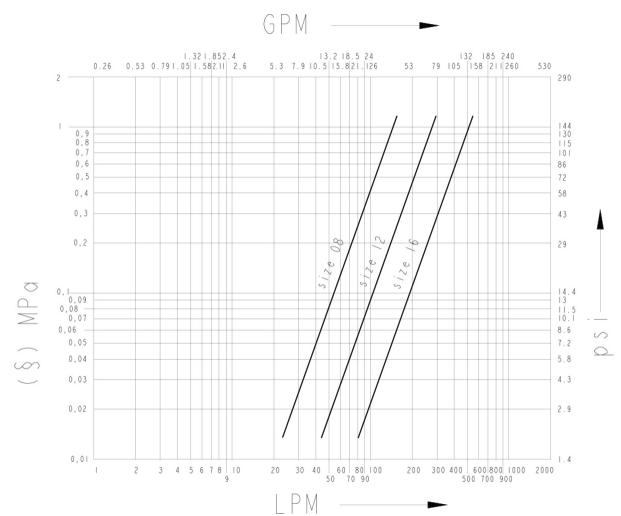

Data shown in the diagram are indicative and not binding.  
 (§) 1 MPa = 10 bar. Dash size are specified.