


FFH

Flat face couplings, ISO 16028 interchange, 35 MPa series

Flat face couplings with real maximum working pressure of 35 MPa and Zinc-Nickel plating. Flat valve shut-off system contributes to prevent contamination and spillage. ISO 16028 interchange.



Applications

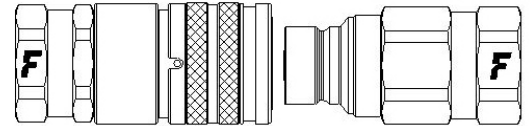

Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
1/8	35	12	0,001	105	170	140	180
1/4	35	25	0,006	110	170	140	180
3/8	35	50	0,008	150	170	140	170
1/2	35	110	0,01	210	140	140	170
5/8	35	125	0,02	205	140	140	140
3/4	35	160	0,02	215	140	140	140
1	35	230	0,03	280	140	140	170

Seals	NBR & PUR
Material	Steel
Valve Type	Flat
Working temperatures	-25 °C to 100 °C
Surface treatment	MATE 500 (CrIII)
Series Interchange	MARKET
Connection	Push to Connect
Disconnection	Sleeve Retraction
Connection Under Pressure	Not Allowed

