


FFHP

Flat face couplings, high pressure



Applications

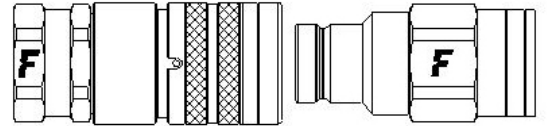


Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
1/4	72	25	0,01	110	216	150	216
3/8	72	46	0,02	200	216	125	216

Seals	NBR & PUR
Material	Steel
Valve Type	Flat
Working temperatures	-25 °C to 100 °C
Surface treatment	MATE 1000 (ZnNi)
Series Interchange	MARKET
Connection	Push to Connect
Disconnection	Sleeve Retraction
Connection Under Pressure	Not Allowed

Pressure Drop

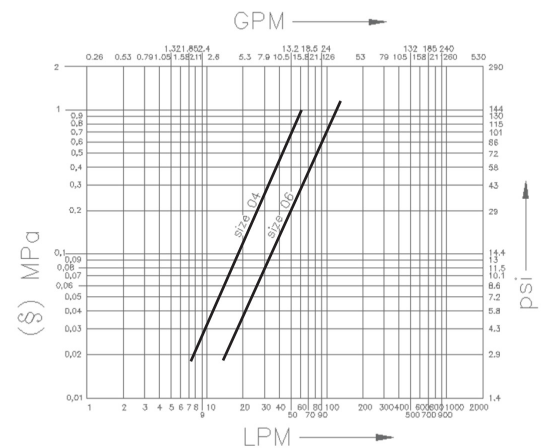

Data shown in the diagram are indicative and not binding.
 (§) 1 MPa = 10 bar. Dash size are specified.