


# FHVFR

Screw to connect flat face coupling, BOP



## Applications

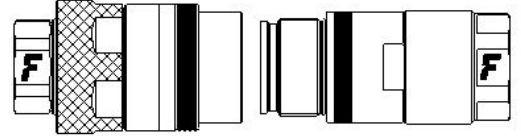


## Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
3/4	46	120	0,02	0	140	140	160

Seals	<b>SPECIAL</b>
Material	<b>Steel</b>
Valve Type	<b>Flat</b>
Working temperatures	<b>BOP to BOP</b>
Surface treatment	<b>MATE 1000 (ZnNi)</b>
Series Interchange	<b>FASTER</b>
Connection	<b>Screw to Connect</b>
Disconnection	<b>Unscrew to Disconnect</b>
Connection Under Pressure	<b>Allowed Male Half up to W.P.</b>

## Pressure Drop

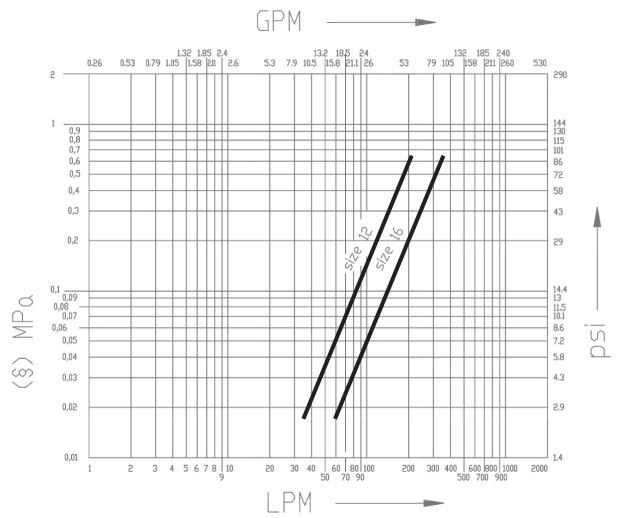

Data shown in the diagram are indicative and not binding.  
 (§) 1 MPa = 10 bar. Dash size are specified.