


HNVN

Standard couplings for industrial applications, Japanese market interchange

Standard couplings for industrial applications, interchangeable for Japanese market.



Applications

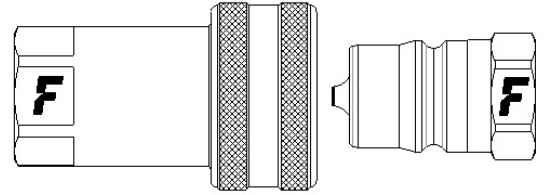


Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
1/4	45	17	1	65	180	200	180
3/8	30	50	1,5	85	130	120	180
1/2	35	75	2,8	97	140	140	150

Seals	NBR
Material	Steel
Valve Type	Poppet
Working temperatures	-25 °C to 125 °C
Surface treatment	MATE 500 (CrIII)
Series Interchange	MARKET
Connection	Sleeve Retraction
Disconnection	Sleeve Retraction
Connection Under Pressure	Not Allowed

Pressure Drop

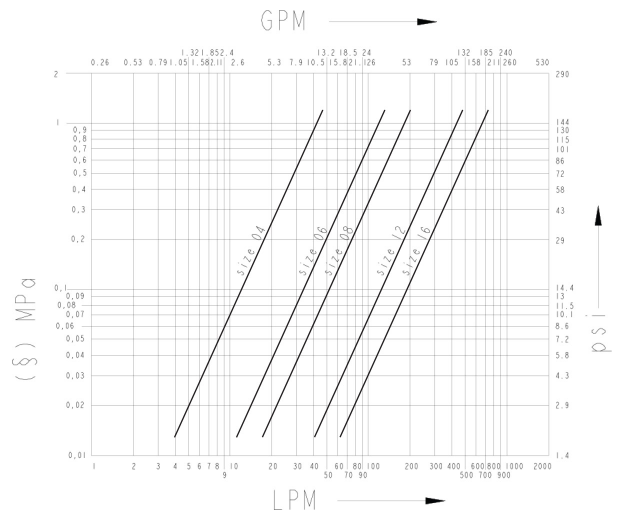

Data shown in the diagram are indicative and not binding.
 (§) 1 MPa = 10 bar. Dash size are specified.