


NS

Standard couplings with ball valve. Faster interchangeability (except size 12,5)

Standard couplings for general purpose applications with ball valve shut-off system. Faster proprietary profile (1/2" size only is interchangeable according to ISO 7241-1 part A).



Applications

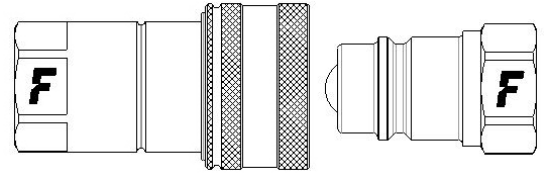

Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
1/4	25	15	0,7	55	100	100	140
3/8	25	30	1	85	100	100	140
1/2	20	50	1,5	90	80	100	120
3/4	17	80	7	170	68	95	150
1	22	140	11	140	90	120	160

Seals	NBR
Material	Steel
Valve Type	Ball
Working temperatures	-25 °C to 125 °C
Surface treatment	MATE 500 (CrIII)
Series Interchange	FASTER
Connection	Sleeve Retraction
Disconnection	Sleeve Retraction
Connection Under Pressure	Not Allowed

