



OGVFR

Screw to connect couplings for oil & gas application, market interchange, BOP certified

Screw-to-connect couplings suitable for Oil & Gas applications. Derived from standard OGV series, thanks to specific components and seals these couplings are API certified and suitable for BOP application.

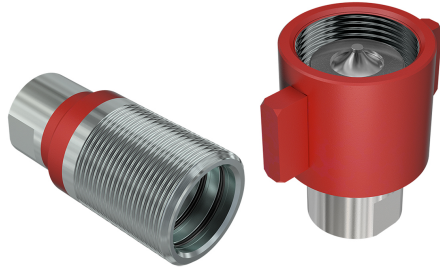

Applications

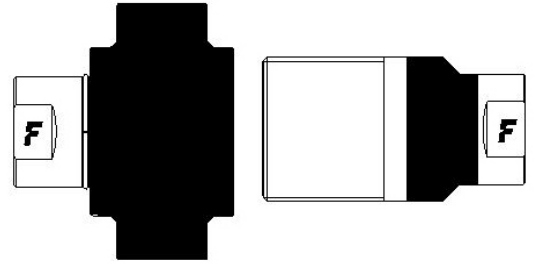

Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
3/4	34.5	120	8		168	160	165
1	34.5	230	18		165	165	172
1-1/4	34.5	320	21		180	200	178

Seals	SPECIAL
Material	Steel
Valve Type	Poppet
Working temperatures	BOP to BOP
Surface treatment	MATE 500 (CrIII) & Paint
Series Interchange	MARKET
Connection	Screw to Connect
Disconnection	Unscrew to Disconnect
Connection Under Pressure	Allowed Residual

