


## P8o8G

Multifaster 8 lines, "G" type



### Applications

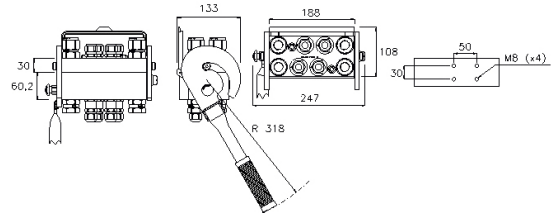

### Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
1/2	25	70	0,01		100	100	100

Seals	<b>NBR &amp; PUR</b>
Material	<b>Aluminium &amp; Steel</b>
Valve Type	<b>Flat</b>
Working temperatures	<b>-25 °C to 100 °C</b>
Surface treatment	<b>MATE 1000 (ZnNi) &amp; Paint</b>
Series Interchange	<b>MULTIFASTER</b>
Connection	<b>Lever</b>
Disconnection	<b>Lever</b>
Connection Under Pressure	<b>Allowed Residual</b>