


PH510

Multifaster, high pressure version, 2 lines size o8, 2 lines size 12

New multiconnection system specifically designed to withstand high pressure applications (42 MPa). Equipped with 2 lines size o8 and 2 lines size 12. Red paint plates and zn-ni surface protection.



Applications

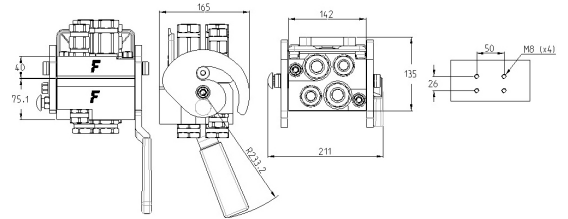

Seals	NBR & PUR
Material	Aluminium & Steel
Valve Type	Flat
Working temperatures	-25 °C to 100 °C
Surface treatment	MATE 1000 (ZnNi) & Paint
Series Interchange	MULTIFASTER
Connection	Lever
Disconnection	Lever
Connection Under Pressure	Allowed Residual