


PLK

Multifaster for harvesting application, 2 lines size o6, 3 lines size o9

PLK series Multifaster has been developed for harvesting applications. Interchangeable according to market driven standards. Two lines size o6, three lines size o9.



Applications

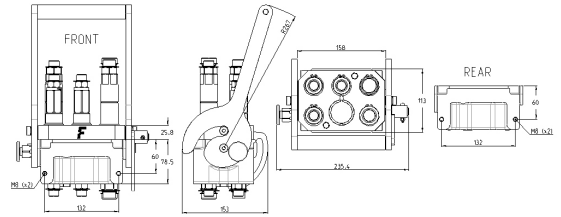

Technical Specifications

| Size (Inch) | Working Pressure (MPa) | Flow Rate (l/min) | Spillage (ml) | Force to Connect (N) | Burst pressure (MPa) | | |
|-------------|------------------------|-------------------|---------------|----------------------|----------------------|--------|---------------|
| | | | | | Male | Female | Male & Female |
| 3/8 | 22 | 20 | 0,02 | | 69 | 69 | 88 |
| 9/16 | 22 | 35 | 0,02 | | 69 | 69 | 88 |

| | |
|---------------------------|-------------------------------------|
| Seals | NBR & PUR |
| Material | Cast Iron & Steel |
| Valve Type | Flat |
| Working temperatures | -25 °C to 100 °C |
| Surface treatment | MATE 500 (CrIII) |
| Series Interchange | MULTIFASTER |
| Connection | Lever |
| Disconnection | Lever |
| Connection Under Pressure | Allowed Male Half up to W.P. |