


PSo6

Multifaster, 4 lines, size o6

Multifaster suitable for 4 hydraulic lines size o6.



Applications

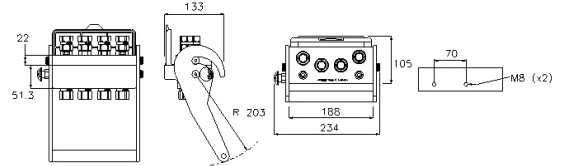

Technical Specifications

| Size (Inch) | Working Pressure (MPa) | Flow Rate (l/min) | Spillage (ml) | Force to Connect (N) | Burst pressure (MPa) | | |
|-------------|------------------------|-------------------|---------------|----------------------|----------------------|--------|---------------|
| | | | | | Male | Female | Male & Female |
| 3/8 | 25 | 40 | 0,008 | | 100 | 100 | 100 |

| | |
|---------------------------|-------------------------------------|
| Seals | NBR & PUR |
| Material | Aluminium & Steel |
| Valve Type | Flat |
| Working temperatures | -25 °C to 100 °C |
| Surface treatment | MATE 500 (CrIII) & Paint |
| Series Interchange | MULTIFASTER |
| Connection | Lever |
| Disconnection | Lever |
| Connection Under Pressure | Allowed Residual |