


PSo8

Multifaster, 5 lines, size o8

Multifaster suitable for 4+1 lines size o8. The additional line could be either an electrical connector or an hydraulic coupling.



Applications

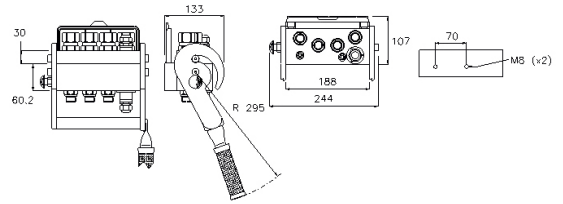

Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
1/2	25	70	0,01	0	100	100	100

Seals	NBR & PUR
Material	Aluminium & Steel
Valve Type	Flat
Working temperatures	-25 °C to 100 °C
Surface treatment	MATE 500 (CrIII) & Paint
Series Interchange	MULTIFASTER
Connection	Lever
Disconnection	Lever
Connection Under Pressure	Allowed Residual